



CAULK FERRULE CLEANOUTS WITH ACCESS COVERS

TAPER THREAD PLUG WITH ROUND COVER

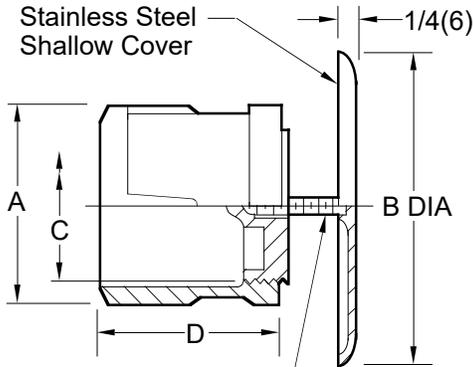

1/4(6) - 20 x 2 1/2(64) Long Flat Head Machine Screw

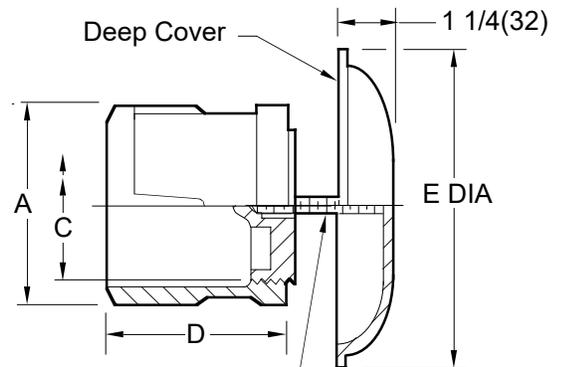

1 1/4(32) - 20 x 1 1/2(38) Long Flat Head Machine Screw

WITH COUNTERSUNK PLUG

- FIG. 4420C LESS COVER AND SCREW
- FIG. 4421C WITH DEEP COVER AND SCREW
- FIG. 4422C WITH SHALLOW COVER AND SCREW

Conforms to ASME A112.36.2/CSA B79.2

A SIZE	B DIA	C SIZE	D	E DIA
▲ 02 (50)	4 1/4 (110)	1 1/2 (38)	3 1/2 (89)	*7 1/4 (185)
▲ 03 (80)	5 1/2 (140)	2 1/2 (64)	3 3/4 (95)	*7 1/4 (185)
▲ 04 (100)	5 1/2 (140)	3 1/2 (89)	4 1/4 (110)	*7 1/4 (185)
05 (125)	7 (180)	4 (100)	4 1/4 (110)	*7 1/4 (185)
06 (150)	9 1/4 (235)	5 (125)	4 1/4 (110)	**9 1/4 (235)
08 (200)	11 1/4 (285)	6 (150)	4 1/2 (115)	**11 1/4 (285)

*= Die Formed SS Cover Only.
 **=Chrome Plated Cover Regularly Furnished
 ▲ Sized for Service Weight and/or NO-HUB

OPTIONAL MATERIALS: (4420 & 4422)

- Prime Coated Steel Shallow Cover -PC

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

- Longer Screw 6"(150) Lg. -LS
- "T" Handle Plug -TH
- Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screw-U

OPTIONAL MATERIALS: (4421)

- Nickel Bronze Deep Cover -NB 9 1/4"(235) & 11 1/4"(285) sizes only
- Polished Bronze Deep Cover -PB 9 1/4"(235) & 11 1/4"(285) sizes only

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S4420
 SIZE A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: BH
 CHECKED BY: BH
 DRAWN BY: RK
 4420 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

N	12-23-25	Added Table Text	TB	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4420 SERIES
M	9-23-24	Revised Optional Materials	HS	CL			
L	4-11-24	Added ASME Note	HS	CL			
K	2-28-24	Revised Optional Materials	HS	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			