

A192.8 Series

BARRIER FREE, BI-LEVEL, WALL MOUNTED
CHILLED DRINKING FOUNTAIN WITH
42" TRIM PANEL

STANDARD FEATURES

- Child or Adult ADA Compliant (When Properly Installed)
- 304 Stainless Steel Basin and Chrome Plated Brass Button
- Polished Stainless Steel, Anti-Rotation, Non-Squirt Bubbler or Flexible Low Flow Bubbler
- 100-Mesh Inlet Strainer
- P-Trap
- Mounting Plate and Hardware (A0000000-MP10)
- Chiller Mounting Frame (A0000000-MF22)
- 42" Trim Panel and Louvered Grille
- Auto-Stop Allows Cartridge and Strainer Service Without Shutting Off Water Supply

SUGGESTED SPECIFICATIONS

Model A192408S is a Wall Mounted, Bi-Level pressure Chilled Drinking Fountain that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Basin shall be constructed from 304 Stainless Steel and have an Integral Drain. Cabinet shall be made from 18 gauge, 304 stainless steel with a brushed finish. Unit shall be activated by Chrome Plated Brass Pushbutton using less than 5 pounds of force. Cooling system shall use R-134a refrigerant and be Capillary Tube regulated. An Adjustable Thermostat with an "off" position shall regulate the refrigeration system. Bubblers shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Unit shall have uniquely designed, two-piece contoured Bowls with P-Traps integral to the unit. Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A192408S	8.0	390	4.4	200 lbs.

*GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature. Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18



Model A192408S Shown

"INDOOR USE ONLY"

MODEL:

(Must Specify)

FLEXIBLE BUBBLER

- A192408F Satin stainless finish

STAINLESS STEEL BUBBLER

- A192408S Satin stainless finish (Shown)

OPTIONS

(additional costs may be incurred)

- RBL Reverse Bi-Level Mounting Plate (A0000000-MP10)
- 220V 220 volt / 50 Hz Compressor (C€)

ACCESSORIES

(additional costs may be incurred)

- SK11 Skirt Kit, Stainless Steel, for Upper Unit¹
- WF3000 3000-gallon PFAS Water Filter¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

NOTE:

1 - Refer to Supplemental Submittal Sheets for Details

[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

A192.8 Series

BARRIER FREE, BI-LEVEL, WALL MOUNTED
CHILLED DRINKING FOUNTAIN WITH 42" TRIM PANEL

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. WATER LINE FROM CHILLER TO FOUNTAIN SHOULD BE COVERED WITH SPONGE FOAM RUBBER OR ICE WATER TYPE INSULATION OF ADEQUATE THICKNESS.

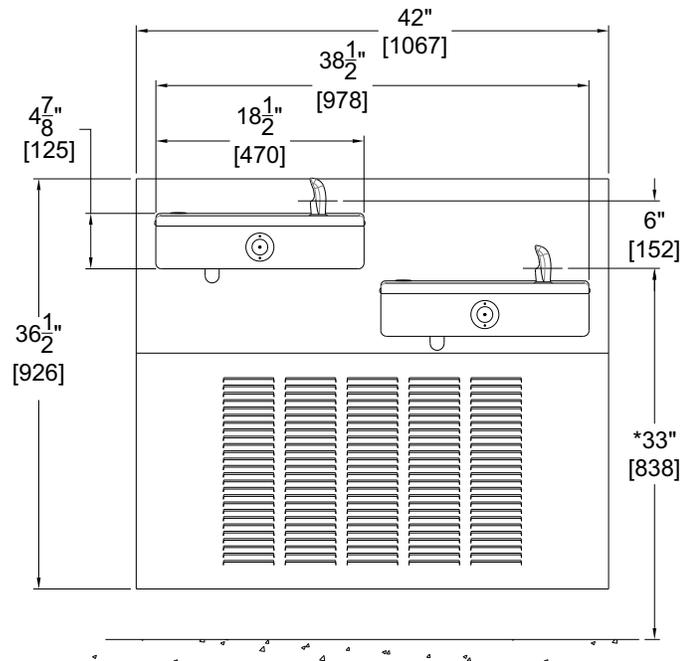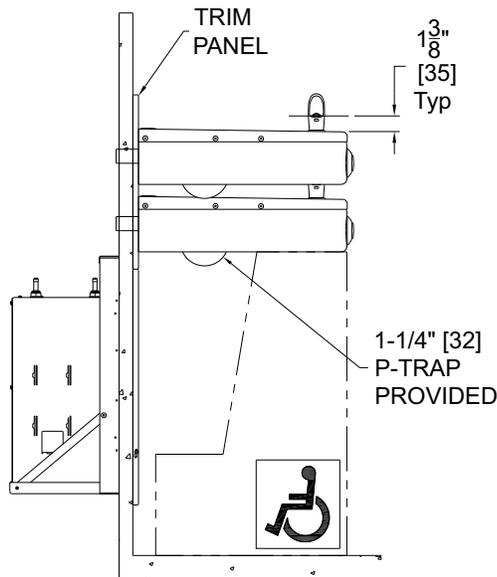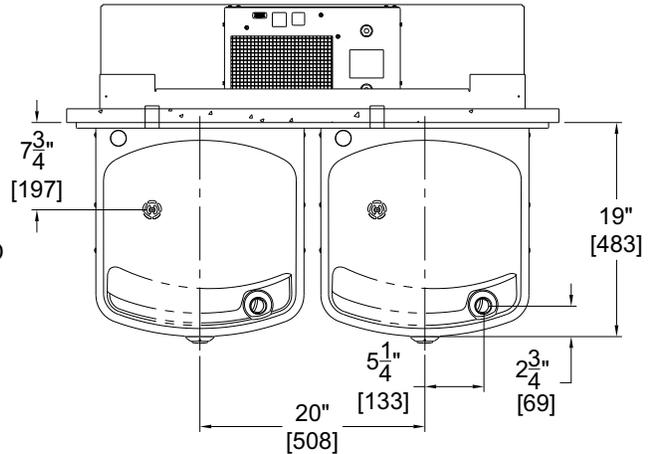

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature _____ Date _____
(Approval for Manufacturing)

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.