


FLOOR DRAINS

LARGE CAPACITY HEAVY DUTY DRAINS - SEDIMENT BUCKET

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

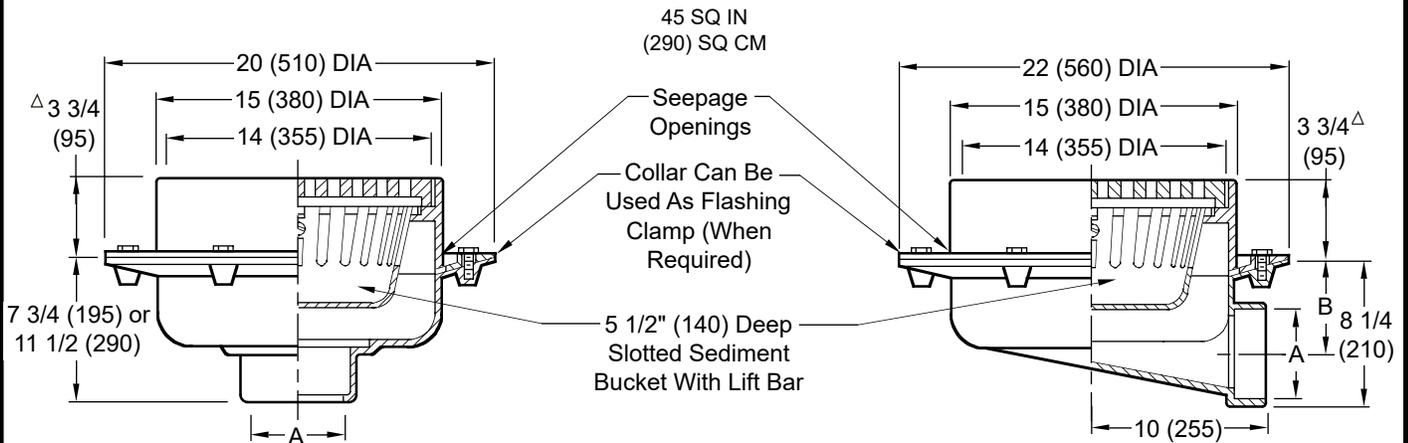

- Fig. 2250C . . . 7 3/4" (195) DEEP BODY
- Fig. 2250T . . . 7 3/4" (195) DEEP BODY
- Fig. 2250Y . . . 7 3/4" (195) DEEP BODY
- Fig. 2253C . . . 11 1/2" (290) DEEP BODY

- Fig. 2255C . . . CAULK OUTLET ONLY

A (Pipe Size) = 03(75), 04(100), 05(125), 06(150) or 08(200)

A SIZE	03 (75)	04 (100)	05 (125)	06 (150)
B	5 7/8 (149)	5 3/8 (136)	4 7/8 (124)	4 3/8 (111)

- △ Add 1/4" (6) when bronze top is specified.
- * When 2" (51) high collar is used suspended bucket is not available.

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing
 Collar with Cast Iron ADA Tractor
 Grate and Slotted Sediment Bucket.

VARIATIONS:

- Dome Grate -D
- 2" (51) High Collar -HC
- Square Top -S
- Vandal Proof Grate -U
- L Speedi-Set® Service Weight
(03 (75) & 04 (100) Sizes Only)
(Fig. 2250 only)
- LXH Speedi-Set® Extra Heavy
(03 (75) & 04 (100) Sizes Only)
(Fig. 2250 only)
- Quad Close Trap Seal
(Specify Fig. 2692) (Fig. 2250 & 2253 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Nickel Bronze Heel Proof
Top -NBHP
- Polished Bronze Heel Proof
Top -PBHP

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2250
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER 2250, 2253, 2255
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		Revised Optional Materials Removed ▲ Note Added @ to "Speedi-Set" Added Load Rating	HS HS KK MW	CL CL CL JM			2250, 2253, 2255