


SPECIAL PURPOSE DRAINS

STAINLESS STEEL - CARBON STEEL

GUTTER DRAIN

Free Area
11.50 SQ IN
(74) SQ CM

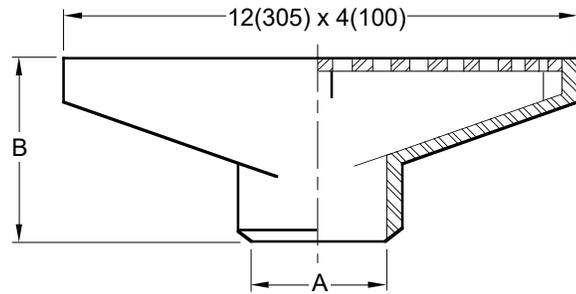

B(BODY HEIGHT)	
BUTTWELD	THREADED
2 7/8 (73)	2 1/4 (57)

A (Pipe Size) = 02(50), 03(75)

- Fig. 9745BW . . . BUTT WELD OUTLET (Sch. 40 Regularly Furnished)
- Fig. 9745T THREADED OUTLET

- Design Pressures and Temperatures**
1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
 2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

REGULARLY FURNISHED:
CF8 (Equivalent to Type 304)
Rough Finished Stainless Steel
Body and Secured Stainless
Steel Grate.

VARIATIONS:
 BW Butt Weld Outlet
(Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:
 A-27 Carbon Steel -A27
 CF8M (Equivalent to Type 316)
Stainless Steel -316

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S9745**
SIZE **A**
SCALE: **NONE**
DATE: **11-12-84**
APPROVED BY: **TD**
CHECKED BY: **VGD**
DRAWN BY: **PJ**
9745
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	9745	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9745