

# CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

## LEAD SEAL PLUG WITH FRAME AND SCORIATED COVER

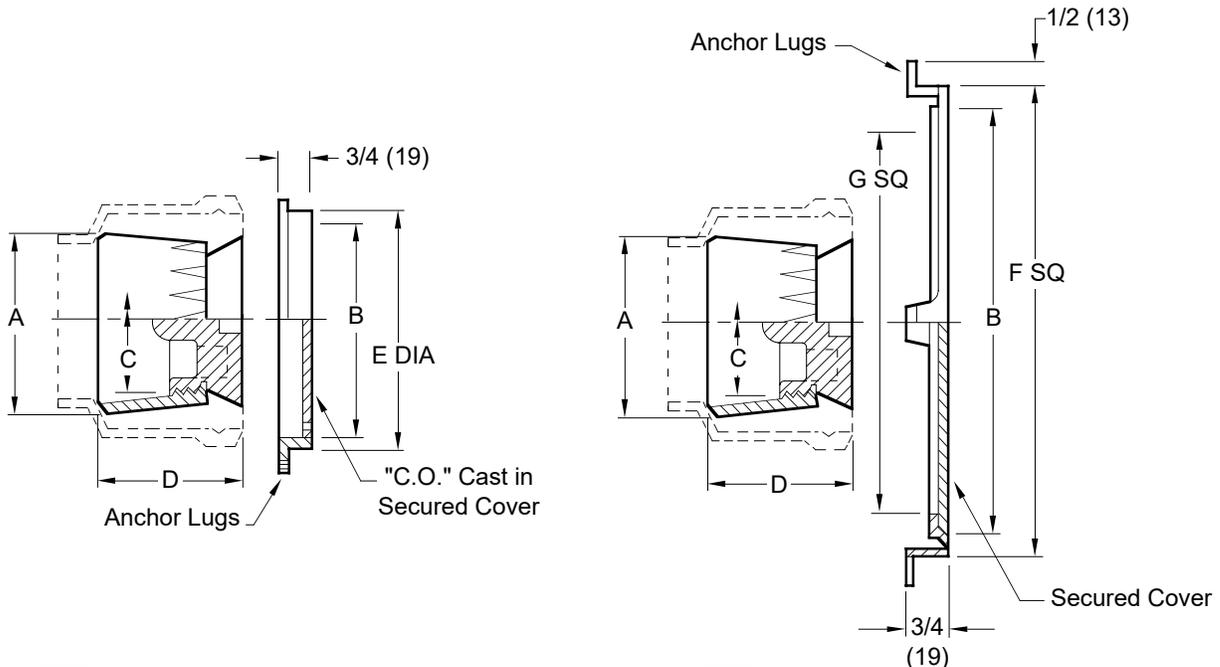


FIG. 4438C . . . . FLUSH-WITH-WALL COVER

FIG. 4439C . . . . FLUSH-WITH-WALL COVER

A SIZE	B OPENING		C SIZE	D	E DIA	F SQ	G SQ
	DIA	SQ					
02 (50)	4 (100)	6 x 6 (150) x (150)	1 1/2 (38)	2 1/2 (64)	4 1/2 (115)	7 (180)	5 1/2 (140)
03 (75)	5 1/2 (140)	6 x 6 (150) x (150)	2 1/2 (64)	2 3/4 (70)	5 3/4 (145)	7 (180)	5 1/2 (140)
04 (100)	6 (150)	6 x 6 (150) x (150)	3 1/2 (89)	3 (76)	6 1/2 (165)	7 (180)	5 1/2 (140)
06 (150)	8 (205)	8 x 8 (205) x (205)	5 1/2 (140)	3 (76)	8 1/2 (215)	9 (230)	7 1/2 (190)

**NOTE:** Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**

Duco Cast Iron Caulk Ferrule with Cast Iron Lead Seal Plug and Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs. Type of Cover as Indicated by Figure Number Selected.

**VARIATIONS:**

- Cover Drilled in Center and Furnished with 1/4"(6)-20 x 2 1/2"(64) Long Screw
- "T" Handle Plug -TH Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screws-U

**OPTIONAL MATERIALS:**

- Cast Bronze Plug -BP
- Polished Bronze Frame and Cover -PB

**4438, 4439**

FIGURE NUMBER	M L K J	10-24-24 10-11-24 2-28-24 8-18-23	Revised Fig. 4438C Revised Table Revised Optional Materials Removed Function	HS HS HS HS	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b>  <b>4438, 4439</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY				

DRAWING NUMBER S4438  
SIZE A  
SCALE: NONE  
DATE: 4-11-83  
APPROVED BY: SJM  
CHECKED BY: SJM  
DRAWN BY: CR  
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA