


# GENERAL PURPOSE ROOF DRAINS

## MEDIUM WIDE FLANGE BODY WITH "SAFE-SET" BUCKET

DRAWING NUMBER **SDX1240**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **8-10-06**  
 APPROVED BY: **CL**  
 CHECKED BY: **CL**  
 DRAWN BY: **TBW**  
**DX1240**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

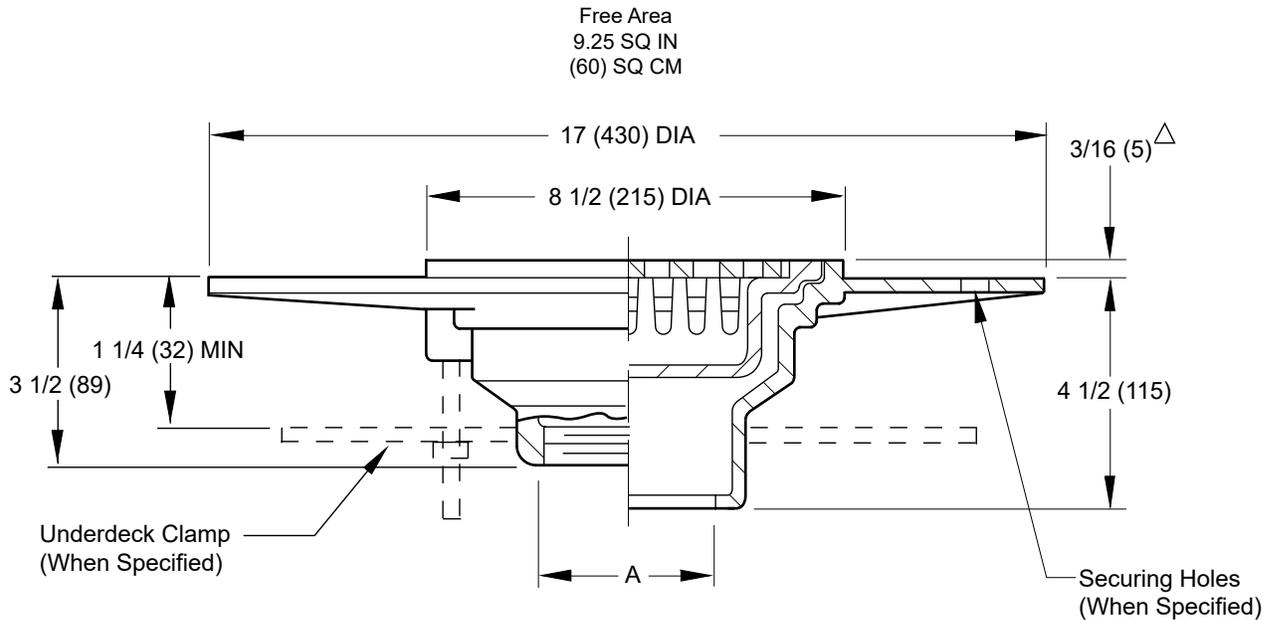

Free Area  
9.25 SQ IN  
(60) SQ CM

A (Pipe Size) = 02(50),03(75) or 04(100)

- Fig. DX1240C . . . . CAULK OUTLET
- Fig. DX1240T . . . . THREADED OUTLET

△ add 3/16"(5) when bronze top is specified.

**REGULARLY FURNISHED:**

Duco Cast Iron Wide Flange Body with ADA Slotted Grate and "Safe-Set" Sediment Bucket.

Use only where light rainfall is prevalent or in covered roof areas. When heavy rainfall is anticipated use DX1010 or DX2566.

**NOTE:** Recommended deck opening 9 1/4(235).

**VARIATIONS:**

- Membrane Clamp (Specify DX2565R)
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Securing Holes -SH
- Underdeck Clamp -C

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	<b>B</b>	<b>9-29-23</b>	<b>Removed Function</b>	<b>HS</b>	<b>CL</b>	<b>WEIGHT POUNDS</b>	<b>VOLUME CUBIC FEET</b>	<b>FIGURE NUMBER</b>
	<b>A</b>	<b>1-19-23</b>	<b>Added ADA to Reg. Furnished</b>	<b>KK</b>	<b>CL</b>			<b>DX1240</b>
REV.	DATE	DESCRIPTION		BY	CKD. BY			