


# ADJUSTABLE FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS

## NARROW WALL HORIZONTAL WATER CLOSET SUPPORTS

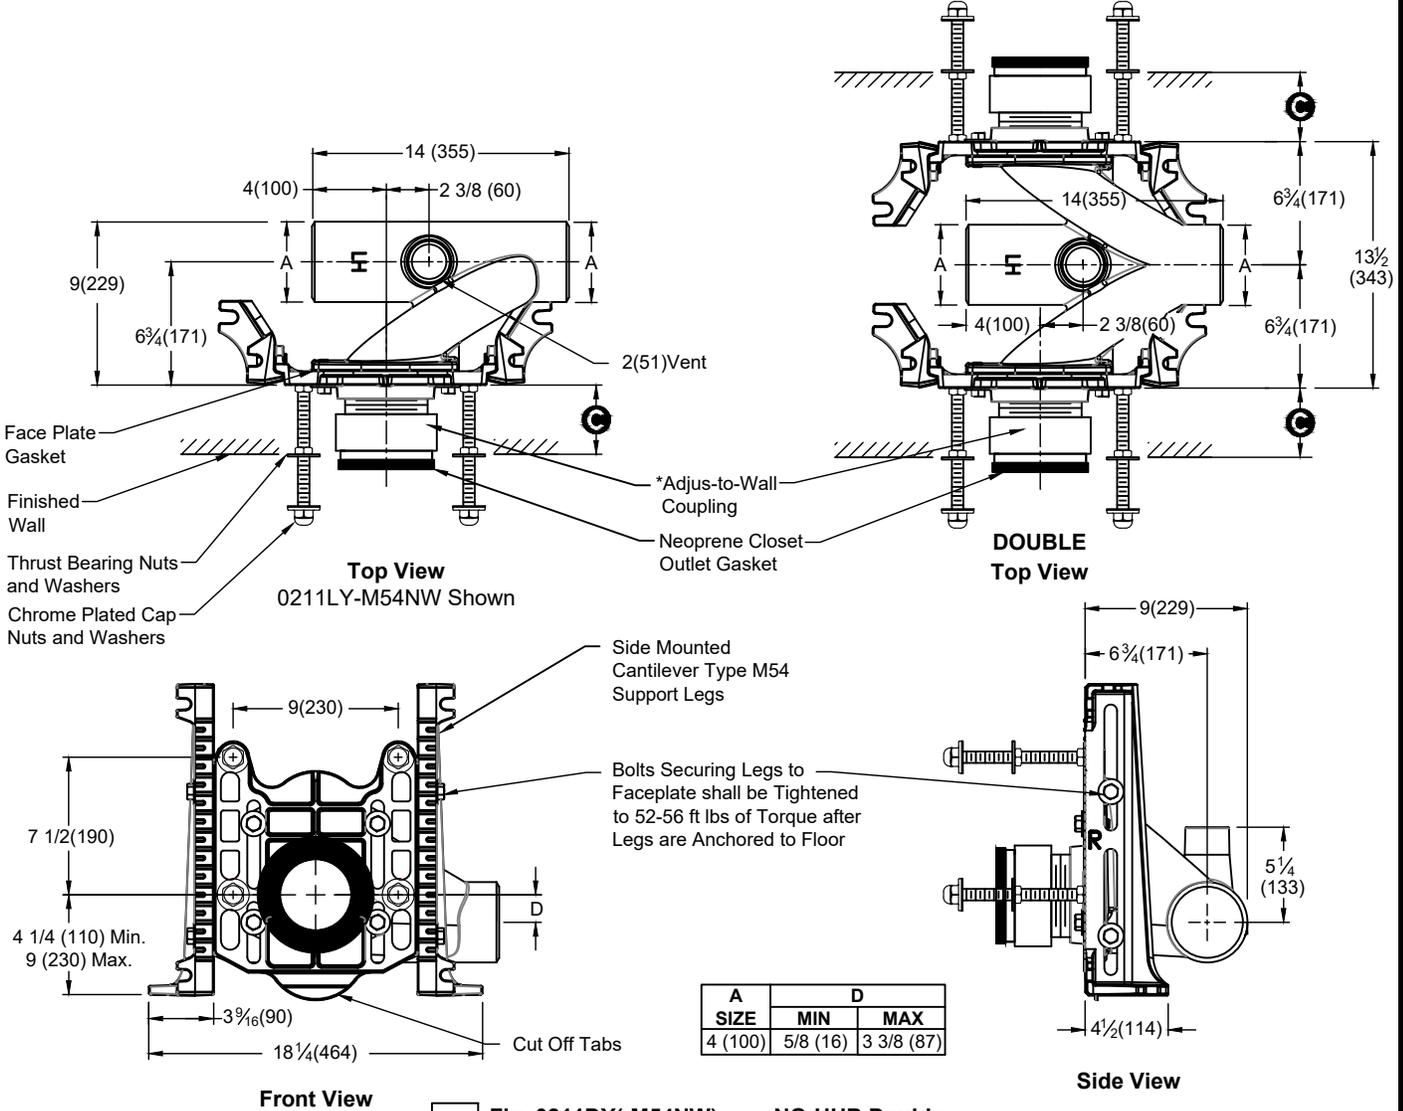

**NOTES:**

- Support must be securely anchored to the structural slab with one 1/2" (13) anchor per support leg, each able to withstand a pull-out force of 1750 lbs (974 kg). Pull-out force is a calculated value, no safety factor has been applied.
- The side mounted Cantilever Type M54 support legs do not require a rear anchor on the fitting.
- Cast iron components are Duco coated.
- Dimensions shown in parentheses are in millimeters.

Conforms with the requirements of ASME A112.6.1M up to a 500lbs (227KG) static load rating, without a rear anchor.

Ⓢ Dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3" (76) min. to 4" (100) max. Longer nipples are available, specify Ⓢ dimension. Absolute minimum Ⓢ dimension is 1 1/2" (38) with short butt end nipple less the Adjus-to-Wall coupling.

\*ABS (Regularly Furnished)

DRAWING NUMBER: S0211Y-M54NW  
 SIZE: A  
 SCALE: NONE  
 DATE: 5-15-24  
 APPROVED BY: DP  
 CHECKED BY: CL  
 DRAWN BY: HS  
 FIGURE NUMBER: 0211Y (-M54NW)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

C	2-13-25	Added Double Option Revised Notes Revised Notes	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>0211Y (-M54NW)</b>
B	6-27-24		HS	CL			
A	6-25-24		HS	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			