


SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS

A.R. COATED NON-TRAFFIC TOPS

Conforms to ASME A112.6.7/CSA B79.7

4" (100) x 8" (205) RECTANGULAR TOP - SHALLOW RECEPTORS

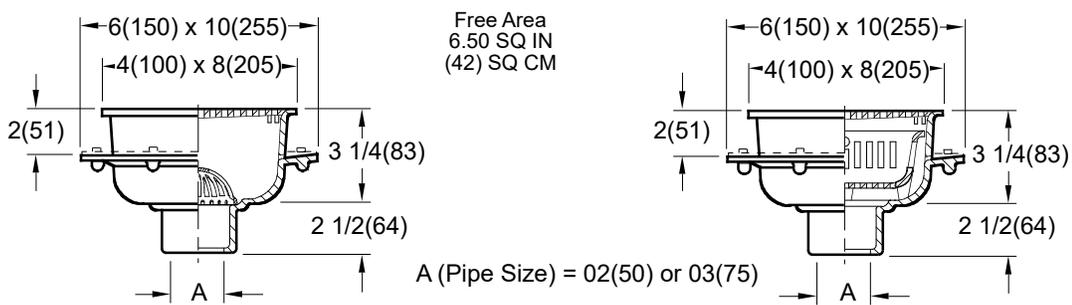


WITH DOME BOTTOM STRAINER WITH SEDIMENT BUCKET

Fig. 3460C CAULK OUTLET Fig. 3461C
 Fig. 3460Y NO-HUB OUTLET Fig. 3461Y

NOTE: When 02(50) NO-HUB outlet is specified a caulk outlet w/9502 Speedi-Seal gasket will be supplied.

6" (150) X 12" (305) RECTANGULAR TOP - DEEP RECEPTORS

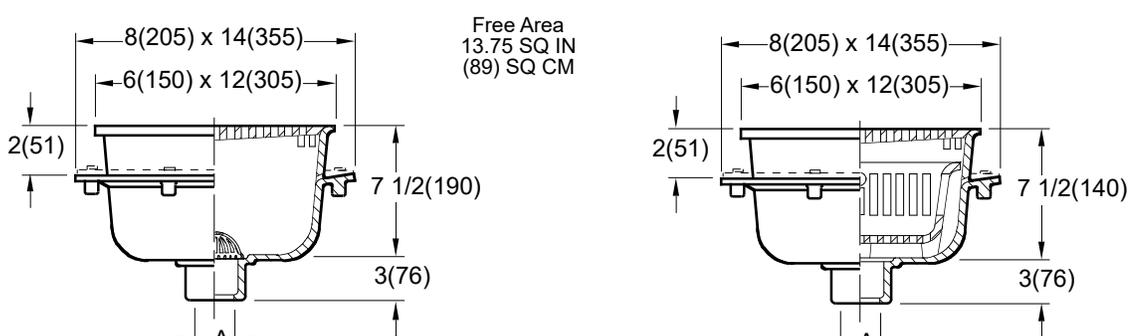

WITH DOME BOTTOM STRAINER WITH SEDIMENT BUCKET

Fig. 3470C CAULK OUTLET Fig. 3471C
 Fig. 3470Y NO-HUB OUTLET Fig. 3471Y

NOTE: When NO-HUB outlet is specified a caulk outlet w/9502 Speedi-Seal gasket will be supplied.

REGULARLY FURNISHED:
 Cast Iron Flanged Receptor with Acid Resistant Coated Interior with Loose Set Acid Resistant Coated Grate, Aluminum Dome Bottom Strainer or Aluminum Sediment Bucket as Indicated by Figure Number.

- VARIATIONS:**
- Acid Resistant Coated 1/2 Grate (Suffix -12)
 - Aluminum Flat Bottom Strainer -FBS
 - Flashing Clamp -C
 - Polished Aluminum Dome Bottom Strainer -PDBS

- OPTIONAL MATERIALS:**
- All Duco Cast Iron Receptor and Grate -CI
 - All Galvanized Receptor and Grate -G

NOTE: This grate is not recommended for any type of traffic including pedestrian traffic.
NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S3460
 SIZE: A
 SCALE: NONE
 DATE: 9-19-85
 APPROVED BY: SJM
 CHECKED BY: JD
 DRAWN BY: PJ
 3460-3471 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

K	4-19-24	Added ASME Note	HS	BW			
J	7-25-23	Removed Function	HS	CL	WEIGHT	VOLUME	FIGURE NUMBER
H	5-24-17	Revised Variations	TBW	BW	POUNDS	CUBIC FEET	3460-3471
G	6-6-12	Added Notes	TBW	CL			SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			