



JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com




LOCATION

OVERFLOW ROOF DRAIN

8 1/2" DIAMETER - LOW PROFILE DOME

Free Area
 41.5 SQ IN
 (268) SQ CM

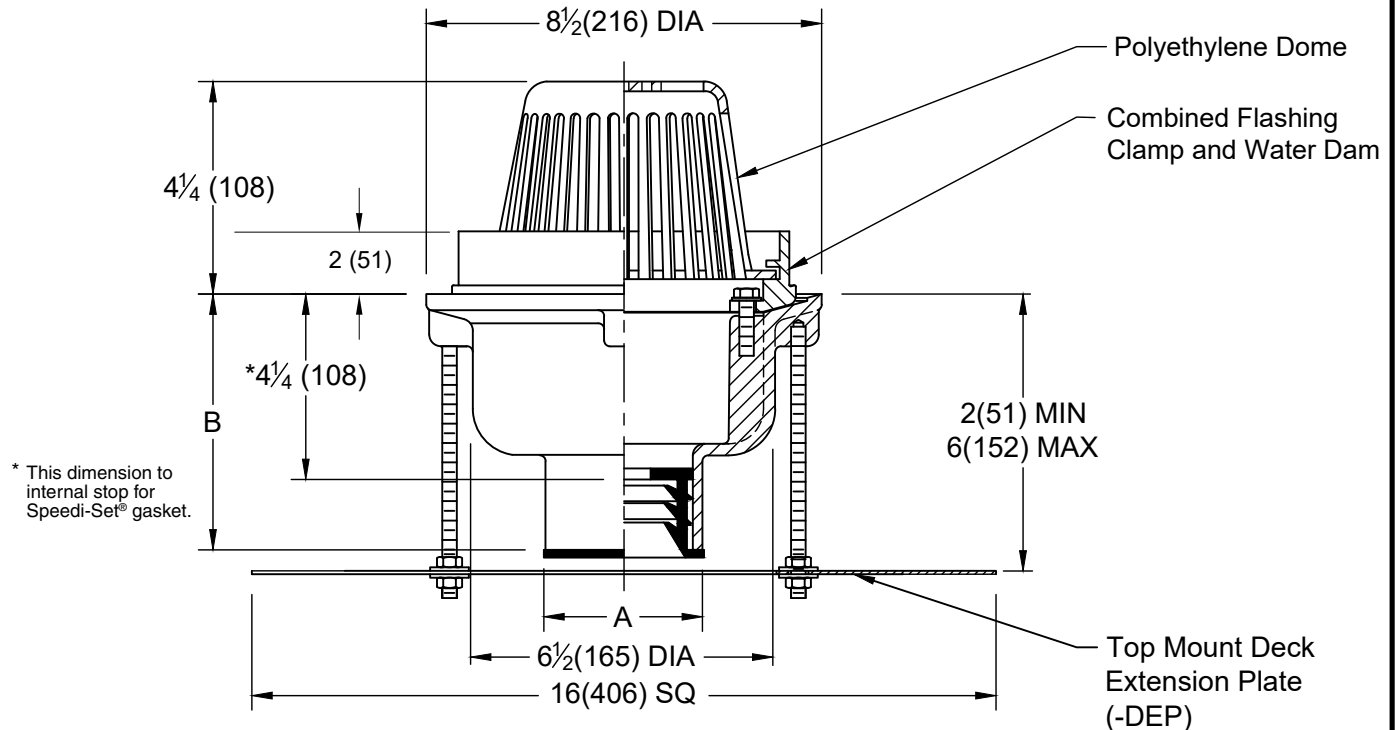

* This dimension to internal stop for Speedi-Set gasket.

A SIZE	02 (50)	03 (75)	04 (100)
B	5 1/2 (140) for Caulk, NO-HUB and Speedi-Set®. 4 1/4 (108) for Threaded		

Recommended Deck Opening 9 (229) Dia.
--

- ☐ Fig. 1330C-WD02-DEP.CAULK OUTLET
☐ Fig. 1330T-WD02-DEP.THREADED OUTLET
☐ Fig. 1330Y-WD02-DEP.NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Coated Iron Body,
 Combined Flashing Clamp and
 Water Dam and Polyethylene
 Dome with Top Mount Deck
 Extension Plate.

VARIATIONS:

- ☐ L Speedi-Set® Service Weight
 Outlet Conn.
☐ LXH Speedi-Set® Extra Heavy
 Outlet Conn.
☐ Vandal Proof Dome -U
☐ 2 1/2 (64) Water Dam -WD025

OPTIONAL MATERIALS:

- ☐ Cast Iron Dome -CID
☐ Aluminum Dome -AD
☐ Galvanized Cast Iron Body and
 Collar -G
☐ Galvanized Cast Iron Dome -CIDG
☐ Rough Bronze Dome -RBD

NOTE: Dimensions shown in
 parentheses are in millimeters

1330-WD02-DEP

FIGURE
 NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT
 POUNDS

VOLUME
 CUBIC FEET

FIGURE NUMBER

1330-WD02-DEP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov