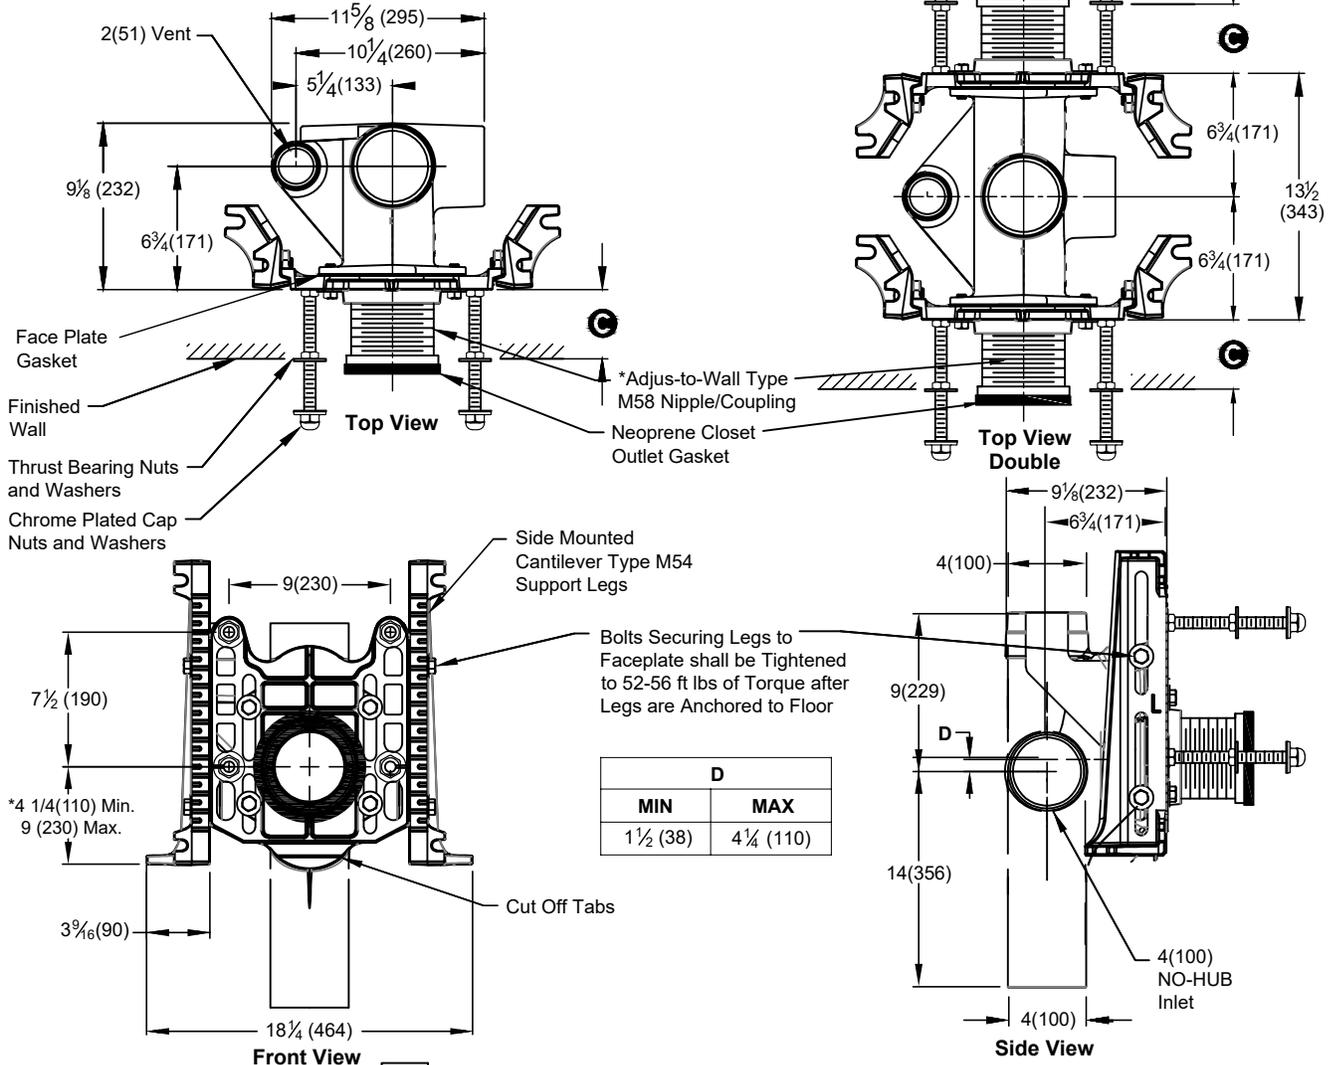


# ADJUSTABLE FIXTURE SUPPORTS

## FOR SIPHON JET WATER CLOSETS


### NARROW WALL NO-HUB VERTICAL FITTING WITH SIDE INLET

Conforms with the requirements of ASME A112.6.1M up to a 500lbs (227KG) static load rating, without a rear anchor.



**Fig. 0240LY(-M58-M54NW) . . . NO-HUB Left Hand Inlet**  
**Fig. 0240RY(-M58-M54NW) . . . NO-HUB Right Hand Inlet**  
**Fig. 0240DY(-M58-M54NW) . . . NO-HUB Double**

D	
MIN	MAX
1 1/2 (38)	4 1/4 (110)

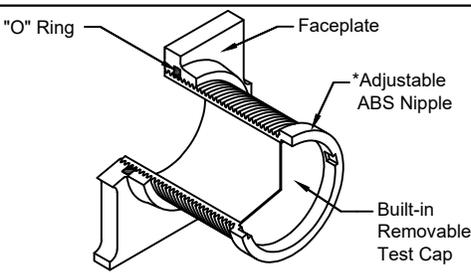

- NOTES:**
- Support must be securely anchored to the structural slab with one 1/2" (13) anchor per support leg, each able to withstand a pull-out force of 1750 lbs (974 kg). Pull-out force is a calculated value, no safety factor has been applied.
  - The side mounted Cantilever Type M54 support legs do not require a rear anchor on the fitting.
  - Cast iron components are Duco coated.
  - 9" (230) core drilled hole is required for rough-in 4 1/4 (110) thru 6 1/2 (165).
  - Dimensions shown in parentheses are in millimeters.

	MIN	MAX
	8 3/4" (222)	9 3/4" (247)

\*NOTE: When nipple lengths between 3 1/4"(83) and 9 3/4"(247) are specified, the 10"(255) nipple will be supplied. The threaded end of nipple must be cut to specified length by others. Absolute minimum dimension is 1 1/2"(38).

\*ABS (Regularly Furnished)

DRAWING NUMBER: s0240Y-M58-M54NW  
 SIZE: A  
 SCALE: NONE  
 DATE: 6-14-24  
 APPROVED BY: DP  
 CHECKED BY: CL  
 DRAWN BY: JJT  
 FIGURE NUMBER: 0240Y(-M58-M54NW)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	2-13-25	Added Double Option Revised Notes	HS	CL			0240Y(-M58-M54NW)
A	6-27-24		HS	CL			