

E



JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com





MEMBER OF:

LOCATION

GENERAL PURPOSE ROOF DRAIN

8 1/2" (215) DIAMETER - LOW PROFILE DOME - WITH DECK PLATE

Free Area
 41.5 SQ IN
 (268) SQ CM

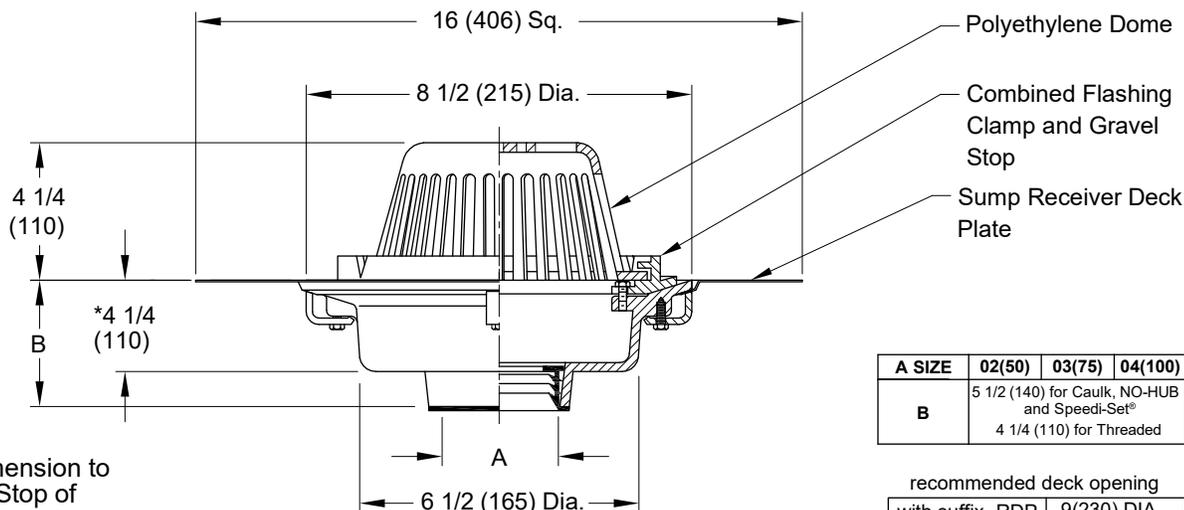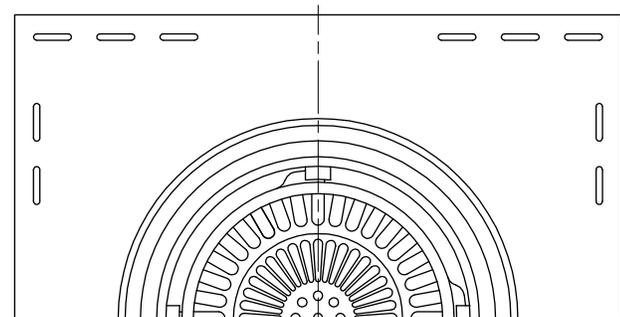

* This Dimension to Internal Stop of Speedi-Set® Gasket.

A SIZE	02(50)	03(75)	04(100)
B	5 1/2 (140) for Caulk, NO-HUB and Speedi-Set® 4 1/4 (110) for Threaded		

recommended deck opening	
with suffix -RDP	9(230) DIA
less suffix -RDP	7 3/4(195) DIA

Fig. 1330C (-RDP). CAULK OUTLET
 Fig. 1330Y (-RDP). NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron body with Attached Deck Plate, Combined Flashing Clamp and Gravel Stop and Polyethylene Dome.

VARIATIONS:

- L Speedi-Set® Service Weight Outlet (Fig. 1330 only)
- LXH Speedi-Set® Extra Heavy Duty Outlet (Fig. 1330 only)
- T Threaded Outlet Conn.
- Side Outlet (Specify Fig. 1340-RDP)
- Expansion Joint (Specify Fig. 1710 (Fig. 1330 only))
- Extension (Specify Height) -E
- Secondary Flashing Clamp -C2
- Vandal Proof Dome -U
- External Waterdam Collar -WD (Specify Height 2", 3", 4")

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Dome -CIDG
- Galvanized Cast Iron Body & Collar -G
- Rough Bronze Dome -RBD

1330-RDP

DRAWN BY: CR

CHECKED BY: CR

APPROVED BY: CR

DATE: 11-03-2007

SCALE: NONE

DRAWING NUMBER: S1330-RDP

FIGURE NUMBER

E	9-28-23	Removed Function
D	3-8-23	Added @ to "Speedi-Set"
C	7-30-19	Removed NOTE
B	11-13-15	Added Flow Rate Note

HS	CL
KK	CL
MW	CL
TBW	BW

BY	CKD. BY
----	---------

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

1330-RDP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA