

DRAWING NUMBER
s1010-E-R-C

SIZE
A

SCALE:
NONE

DATE:
11-3-21

APPROVED BY:
CR

CHECKED BY:
CR

DRAWN BY:
KK


FIGURE NUMBER
1010-E-R-C

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

LARGE GENERAL PURPOSE ROOF DRAIN

LOW PROFILE DOME WITH EXTENSION

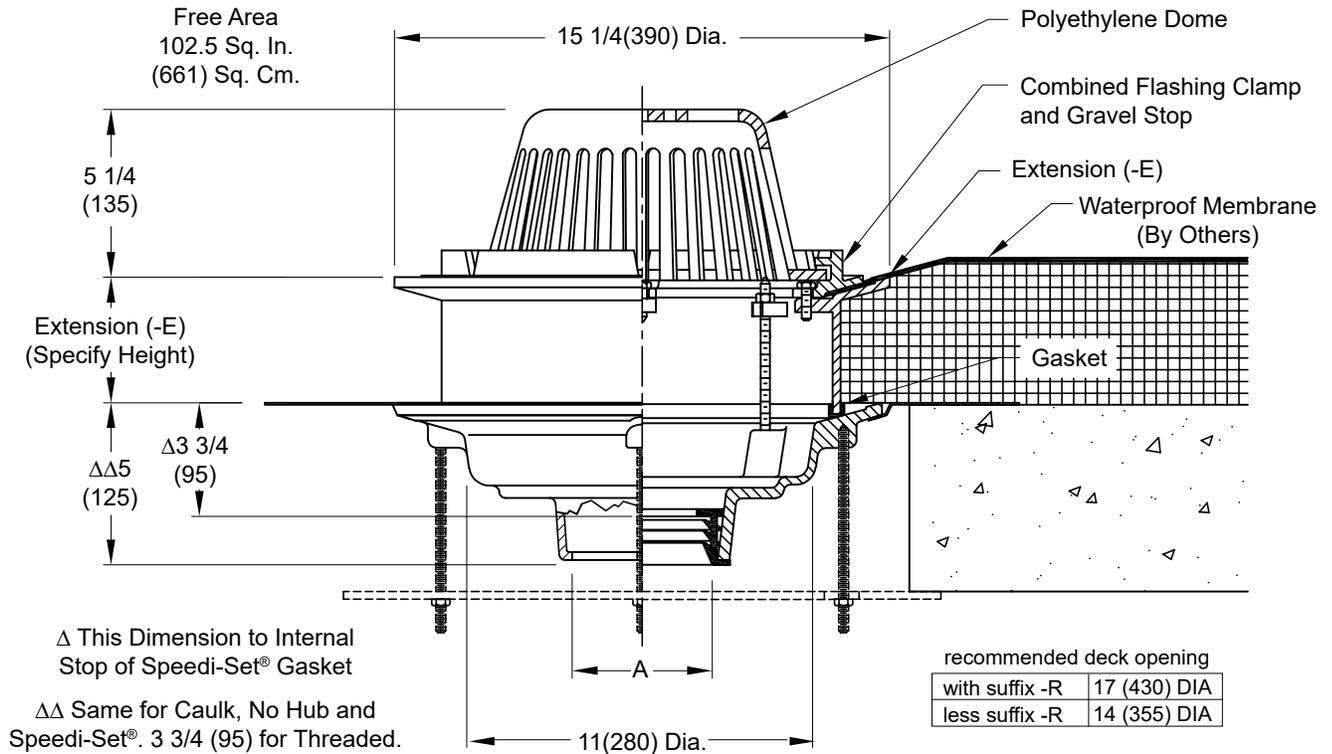

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), or 06(150)

- Fig. 1010C (-E-R-C) CAULK OUTLET
- Fig. 1010T (-E-R-C) THREADED OUTLET
- Fig. 1010Y (-E-R-C) NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop, Cast Iron Extension with Gasket and Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - "L" Shaped Underdeck Clamp - CL
 - L Speedi-Set® Service Weight
 02(50), 03(75) & 04(100) sizes
 - LXH Speedi-Set® Extra Heavy
 02(50), 03(75), & 04(100) sizes
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Dome -U
 - Roof Deck Plate -RDP

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Galvanized Cast Iron Body and Collar -G
 - Galvanized Cast Iron Dome -CIDG
 - Rough Bronze Dome -RBD

D	8-15-24	Revised Variations and Fig. Opts. Removed Function Added @ Updated Reg. Furnished	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1010-E-R-C
C	9-27-23		HS	CL			
B	2-23-23		KK	CL			
A	12-21-22		KK	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			