

H



SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

SPECIAL PURPOSE ROOF DRAIN

LOW PROFILE DOME WITH DECK PLATE

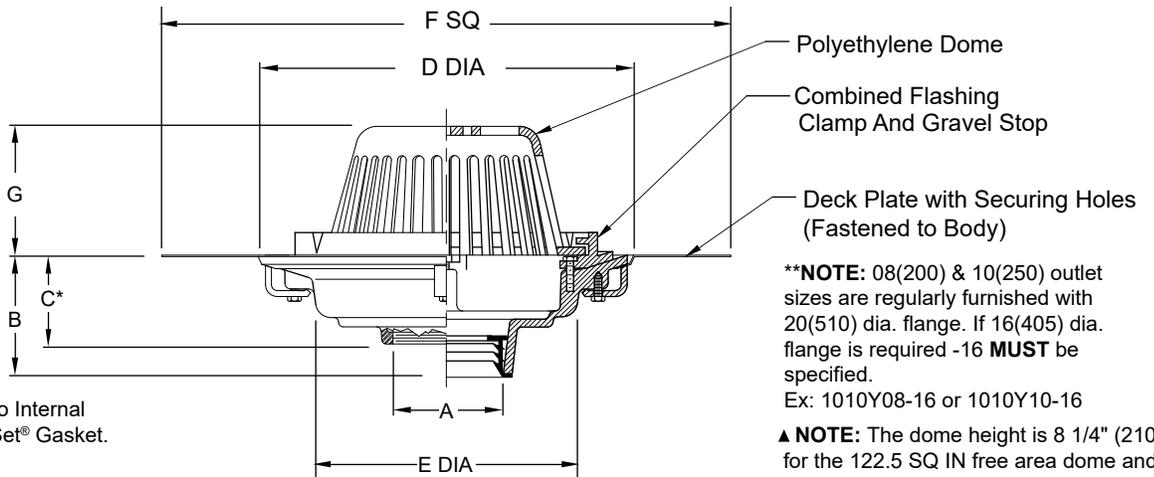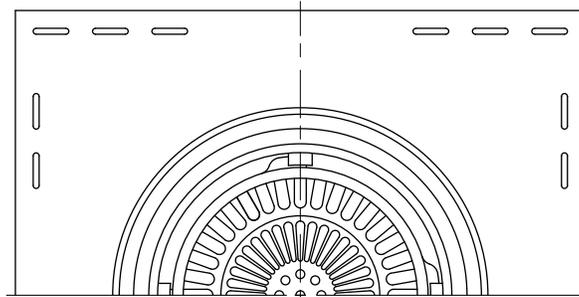

*This Dimension to Internal Shop of Speedi-Set® Gasket.

Polyethylene Dome
 Combined Flashing Clamp And Gravel Stop
 Deck Plate with Securing Holes (Fastened to Body)

****NOTE:** 08(200) & 10(250) outlet sizes are regularly furnished with 20(510) dia. flange. If 16(405) dia. flange is required -16 **MUST** be specified.
 Ex: 1010Y08-16 or 1010Y10-16

▲ NOTE: The dome height is 8 1/4" (210) for the 122.5 SQ IN free area dome and is regularly furnished in Cast Iron and is not available in polyethylene.

Fig. 1010Y-RDP..... NO-HUB OUTLET
 Fig. 1010C-RDP..... CAULK OUTLET

A SIZE	B CAULK, NO-HUB, & SPEEDI-SET®	THREADED	C*	D DIA	E DIA	F	G	FREE AREA SQ IN
02(50), 03(75) or 04(100)	5(125)	3 3/4(95)	3 3/4(95)	15 1/4(390)	11(280)	24(610)	5 1/4(133)	102.5(661)
05(125) or 06(150)	5(125)	3 3/4(95)	--	15 1/4(390)	11(280)	24(610)	5 1/4(133)	102.5(661)
**08(200)-16,	6	5	--	16	12 1/2	24	5 1/4(133)	102.5 (661)
**10(250)-16	(150)	(125)	--	(405)	(320)	(610)	8 1/4(210)	122.5 (790)
08(200), 10(250), or 12 (300)	7 3/4(195)	7 3/4(195)	--	20(510)	16(405)	28(711)	7 1/4(185)	228(1471)

REGULARLY FURNISHED:

Duco Cast Iron Body with attached Deck Plate with Securing Holes, combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

VARIATIONS:

- L Speedi-Set® Service Weight Outlet Conn. (02, 03, and 04) Sizes Only
- LXH Speedi-Set® Extra Heavy Duty Outlet Conn. (02, 03, and 04) Sizes Only
- T Threaded Outlet Conn. Extension (Specify Height) -E
- Secondary Flashing Clamp -C2
- Vandal Proof Dome -U

OPTIONAL MATERIALS:

- ▲▲ Aluminum Dome -AD
- ▲▲ Cast Iron Dome -CID
- ▲▲ Galvanized Cast Iron Dome -CIDG
- ▲▲ Galvanized Cast Iron Body & Collar -G
- ▲▲ Rough Bronze Dome -RBD
- Stainless Steel (Specify Fig. 9780)

NOTE: Dimensions shown in parentheses are in millimeters.

▲▲Optional Domes' free area are as follows:

Dome Mat'l	02-06 Outlets	08 & 10 Outlets
Aluminum	98 (632)	150 (968)
Cast Iron	80 (516)	Reg. Furnished
Bronze	95 (613)	150 (968)

DRAWING NUMBER
S1010-RDP

SIZE
A

SCALE:
NONE

DATE:
02-10-2006

APPROVED BY:
CR

CHECKED BY:
CR

DRAWN BY:
CR

1010-RDP

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY
H	9-27-23	Removed Function Added @ to "Speedi-Set" Added Notes, Revised Table Rev.Opt. Mat., Added Dimensions	HS	CL
G	2-23-23		KK	CL
F	1-19-22		KK	CL
E	9-6-19		MW	CL

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER
1010-RDP