

MULTI-PURPOSE FLOOR CLEANOUTS WITH INTERNAL CLOSURE PLUG

WIDE FLANGE CAST IRON FLOOR CLEANOUT

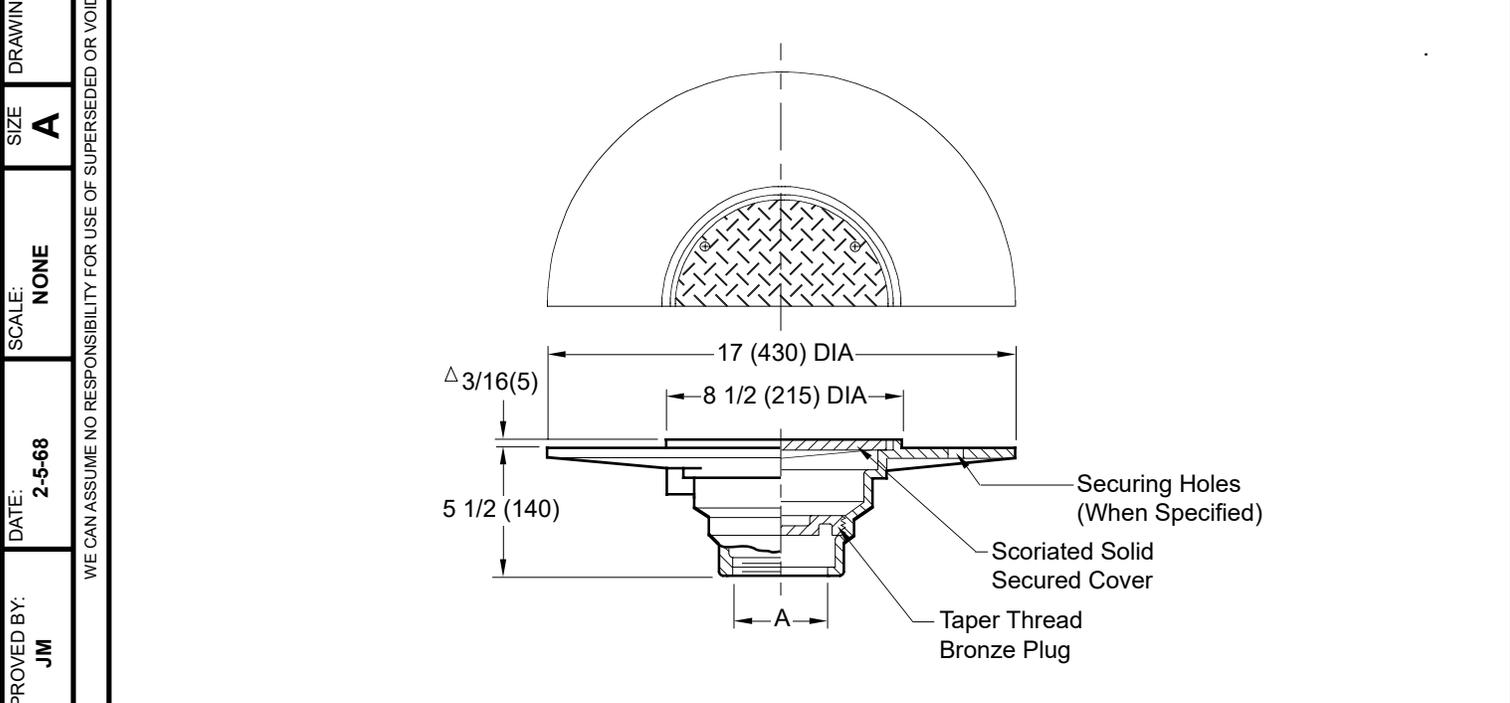


Fig. DX4343C CAULK OUTLET

A(Pipe Size) = 02(50), 03(80) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

If Water-Proof Deck Covering thickness is greater (or less) than dimensions shown, the drain body should be set to compensate for the variation in thickness. Drain body should be set low enough to permit "dimpling" of area surrounding drain.

- | | | |
|---|---|--|
| REGULARLY FURNISHED:
Duco Cast Iron Body with Solid Secured Cover and Taper Thread Bronze Closure Plug. | VARIATIONS:
<input type="checkbox"/> NO-HUB Adaptor (Specify Fig. 2646Y)
<input type="checkbox"/> Securing Holes -SH
<input type="checkbox"/> T Threaded Outlet | OPTIONAL MATERIALS:
<input type="checkbox"/> Nickel Bronze Top -NB
<input type="checkbox"/> Polished Bronze Top -PB |
|---|---|--|

ΔAdd 3/16"(5) when bronze top is specified.

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	DX4343	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
									DX4343

DRAWING NUMBER SDX4343

SIZE A

SCALE: NONE

DATE: 2-5-68

APPROVED BY: JM

CHECKED BY: JS

DRAWN BY: DA

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE