


SPECIAL PURPOSE DRAINS

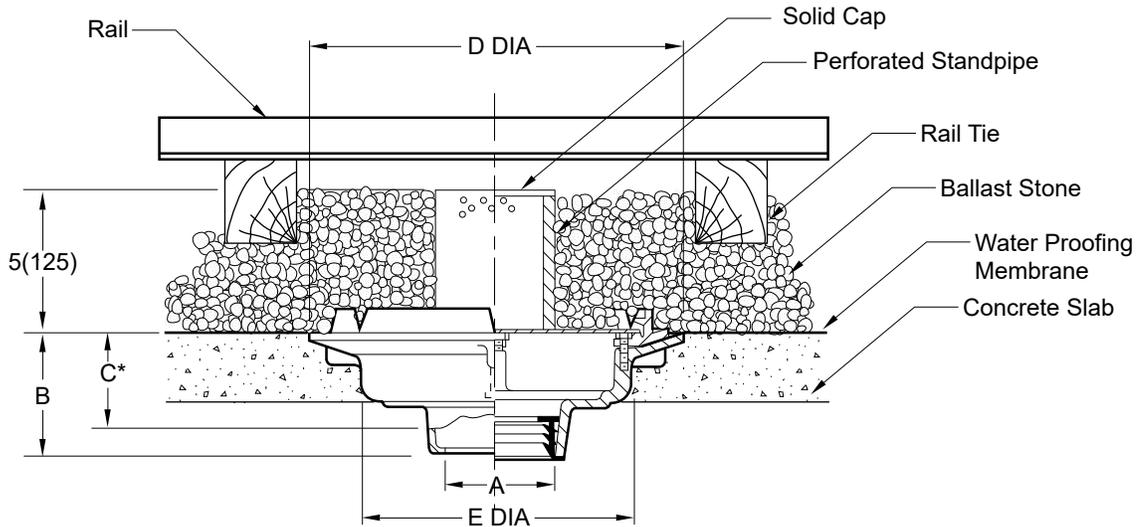

* This Dimension to Internal Stop of Speedi-set Gasket.

A SIZE	B (BOTTOM OUTLET)				
	CAULK, NO-HUB, & SPEEDI-SET	THREADED	C	D DIA	E DIA
02(50),03(75), 04(100)	5 (125)	3 3/4 (95)	3 3/4 (95)	15 1/4 (390)	11 (280)

REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Perforated Standpipe with 3/8" Dia. Holes.

VARIATIONS:

- L Speedi-Set Service Weight 02(50), 03(75), and 04(100)" sizes only
- LXH Speedi-Set Extra Heavy 02(50), 03(75), and 04(100)" sizes only
- Underdeck Clamp -C
- T Threaded Outlet

OPTIONAL MATERIALS:

- Galvanized Cast Iron Body & Collar -G

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: **SSQ-2-945**
 SIZE: **A**
 SCALE: **NONE**
 DATE: **7-13-81**
 APPROVED BY:
 CHECKED BY: **KG**
 DRAWN BY: **KG**
SQ-2-945
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	B A	10-12-23 8-26-06	Removed Function Revised Drawing	HS TBW	CL JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER SQ-2-945
REV.	DATE	DESCRIPTION	BY	CKD. BY				