


E
 DRAWING NUMBER **S9635-S-9638-S**
 SIZE **A**
 SCALE: **NONE**
 DATE: **7-9-14**
 APPROVED BY: **JM**
 CHECKED BY: **CL**
 DRAWN BY: **TBW**
9635 -S - 9638 -S
 FIGURE NUMBER


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

GENERAL PURPOSE FLOOR DRAIN

14"(356) SQUARE TOP

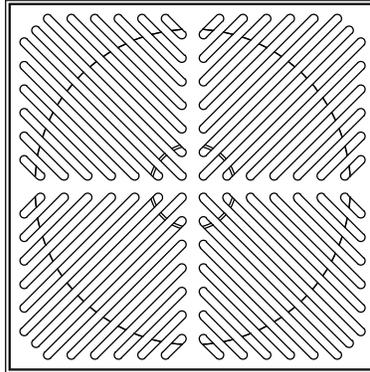

FREE AREA
 73.31 SQ IN
 (472.96 SQ CM)

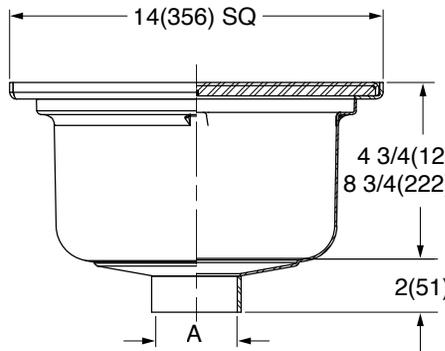

USDA ACCEPTED



ASME A112.6.3 &
 CSA B79
 Certified Light Duty
 Load Rating

A (Pipe Size) = 02(50), 03(75), 04(100) or 06(150)

4 3/4"(121) DEEP	6 3/4"(171) DEEP	8 3/4"(222) DEEP	10 3/4"(273) DEEP	
Fig. <input type="checkbox"/> 9635BW -S	<input type="checkbox"/> 9636BW -S	<input type="checkbox"/> 9637BW -S	<input type="checkbox"/> 9638BW -S	BUTTWELD OUTLET▲
Fig. <input type="checkbox"/> 9635T -S	<input type="checkbox"/> 9636T -S	<input type="checkbox"/> 9637T -S	<input type="checkbox"/> 9638T -S	THREADED OUTLET
Fig. <input type="checkbox"/> 9635Y -S	<input type="checkbox"/> 9636Y -S	<input type="checkbox"/> 9637Y -S	<input type="checkbox"/> 9638Y -S	NO-HUB OUTLET

▲Schedule 40 Regularly Furnished

REGULARLY FURNISHED:
 14 Gauge Type 304 Stainless
 Steel Body and Loose Set
 Heel Proof Slotted Grate with
 No. 4 Finish.

- VARIATIONS:**
- Anchor Flange -F
 - Flange & Flashing Clamp -FC
 - Sediment Bucket -B
 - Dome Bottom Strainer -DBS
 - Vandal Proof Grate -U
 - 1/2"(13) Trap Primer Connection -P050
 - USDA Compliant

OPTIONAL MATERIALS:
 Type 316 Stainless Steel -316

SUBJECT TO MANUFACTURING TOLERANCE AND CHANGE WITHOUT NOTICE.

NOTE: Dimensions shown in parentheses are in millimeters.

E	12-13-21	Added ASME and CSA numbers	KK	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9635 -S - 9638 -S
D	6-9-2020	Revised Regularly Furnished	MW	CL			
C	5-17-18	Revised Variations, Added Note	TBW	CL			
B	4-24-17	Added cUPC	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			