

## Wash-Ware® 3493

Solid Surface 36" Semi-Circular Deep Bowl Washfountain - Three Station - ADA/CBC Compliant



3493-SO-SSO

Fixture May Show Some Available Options



3493-SO-SSO-OCC11M

Fixture May Show Some Available Options

**FEATURES: Deep Bowl, Individual User Stations, 0.35 GPM Nozzle Flow Rate to Support LEED v4, Pre-Assembled Components to Improve Installation, Hands-free Controls, Certified Mixing Valve Easy Access Fold Down Trap Enclosure, Hands-Free Liquid Soap Option, 32 Ounce Soap Tank.**

### Solid Surface 36" Semi-Circular Deep Bowl Washfountain - ADA/CBC Compliant

**Three Station unit** with individual user Controls and Nozzles conserves water. Wall mount, off-floor design allows for intermediate and child rim height. Optional -SO Hands-free Control and -SO Sensor Operated Liquid Soap support safe, healthy hand washing. Center station conforms with ADA and CBC (Calif. T24) Requirements. Trap Enclosure for OBC (Ontario Bldg. Code) is optionally available.

**Basin** consists of a 7-3/4" Deep Bowl with integral, arched 3" high Backsplash, constructed of Corterra® densified solid surface material. Standard color is OCC01A Smokey Granite (Optional colors are available). Includes Chrome Plated Grid Strainer Drain, Tailpiece, and a 1-1/2" PVC P-trap Waste.

**-SO Electronic Sensor Operation Control** option provides Hands-Free Infrared Sensors with low voltage, 9VDC Plug-in Power Supply. Infrared Sensor includes a maximum run time of 90 seconds for vandal resistance. Refer to Installation Instructions for complete details.

**-SO-BAT Battery Powered Sensor Operation Control** option provides Hands-Free Infrared Sensors when no electrical power exists. Batteries are not included.

**-H Pushbutton Operation Control** option activates Metering, Air-Control Valves which are Factory pre-set to a 10 second run time, and are field adjustable from 5 to 60 seconds. ADA compliant Pushbuttons feature a vandal resistant, non-hold open design.

**-SSO Sensor Operated Liquid Soap** option provides hands-free use with 32 oz. (1000 mL.) Soap Bottle and dispenses approximately 0.8 mL of Liquid Soap to provide 1250 uses per Bottle fill. Only available with -SO Hands-free Sensor Operation. (*Battery -SSO Sensor Liquid Soap is not offered.*)

**Sprayhead Nozzles** are vandal-resistant with concentrated 0.35 GPM spray to support LEED v4 water savings. Sprayhead Lid is of Corterra® Solid Surface material and is provided to match selected Basin color. Stanchion includes type 304 Stainless Steel Wall Support Bracket with #4 satin finish.

**Hot and Cold Supplies** are blended in an ASSE 1070/ASSE 1069 Certified, Lead-Free Thermostatic Mixing Valve (Standard). 30 PSI min. supply pressure required. -ST Single Temp Supply is optional.

**Trap Enclosure** conceals Valve, Soap Bottle, and plumbing. Vandal resistant Front Cover is secured with Cylinder Lock (LL24 Key) and folds down for install and to refill Soap Bottle. Front Cover is 16 gauge type 304 stainless steel, polished to a #4 satin finish or with optional -EG Enviro-Glaze® color.

**Units comply with** Uniform Plumbing Code (UPC), National Plumbing Code of Canada (cUPC), ASME A112.19.3, ANSI Z124.6 and meet NSF/ANSI 372 standards.

**Wall Mounting Hardware** and Wall Anchors are all provided by Others to suit Wall construction.

# Wash-Ware® 3493: Solid Surface Semi-Circular Deep Bowl Washfountain - ADA Compliant



## MODEL NUMBER AND OPTIONS SELECTION

### BASE MODEL NUMBERS (Must Specify)

3493 36" Solid Surface Semi-Circular, Three Station

### OPERATION (Must Specify)

- H Hand Operation - Metering Pushbutton
- SO Sensor Operation - Hands-free  
(Electrical Power Supply Required)
- SO-BAT Sensor Operation (Batteries Not Included)

## PRODUCT OPTIONS (continued)

-EG Enviro-Glaze® Powder Coat  
(Trap Enclosure, Stanchion, Sprayhead)

Specify Color: \_\_\_\_\_

Refer to link for colors: <https://www.acorneng.com/enviro-glaze>

- OBC Trap Cover for OBC (Canadian) Compliance
- SSO Liquid Soap, Hands-Free Sensor Operation
- ST Single Temperature Valve

## PRODUCT OPTIONS

### Corterra® Solid Surface Color

(Smokey Granite OCC01A provided standard)  
(Matching Corterra® Sprayhead Lid color is provided)



Color: \_\_\_\_\_ (Refer to link for colors)  
<https://www.acorneng.com/corterra-solid-surface>

### Tankless Water Heater

(Shipped Loose for Remote Mounting)


- H240 Tankless Water Heater, 20 amp 240 volt  
(Chronomite # CM20L/240 104F-NPT08)
- H120 Tankless Water Heater, 20 amp 120 volt  
(Chronomite # CM12L/120 104F-NPT08)

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

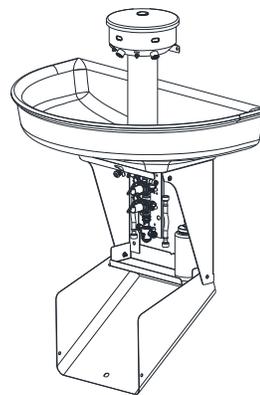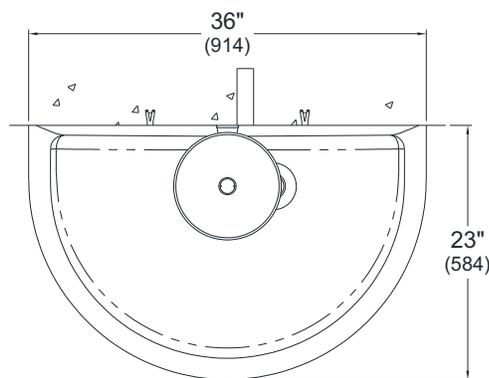


### Notes:


1. Spray Nozzle
2. Hinged Stainless Steep trap Enclosure
3. Optional -SSO Sensor Operated Soap
4. Cylinder Lock
5. 1-1/2" PVC P-trap Waste (Provided)
6. Mounting Hardware (By Others)
7. Optional -OBC Trap Cover

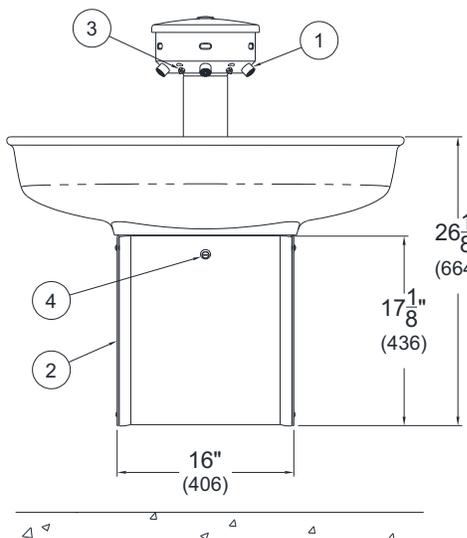

**Front View**

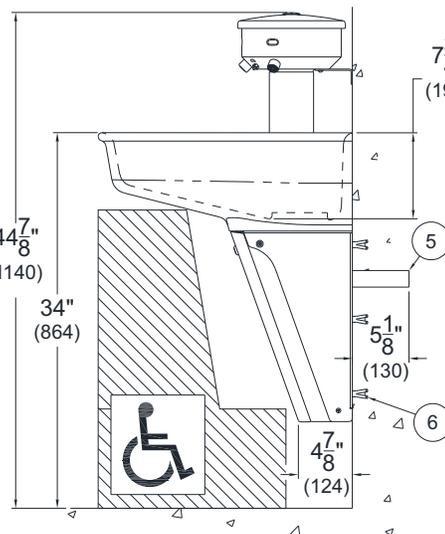

**ADA Side View**

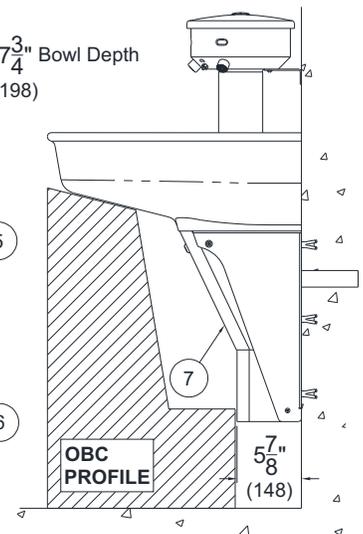

**OBC Side View**

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>