


MULTI-LEVEL PLANTING AREA DRAIN

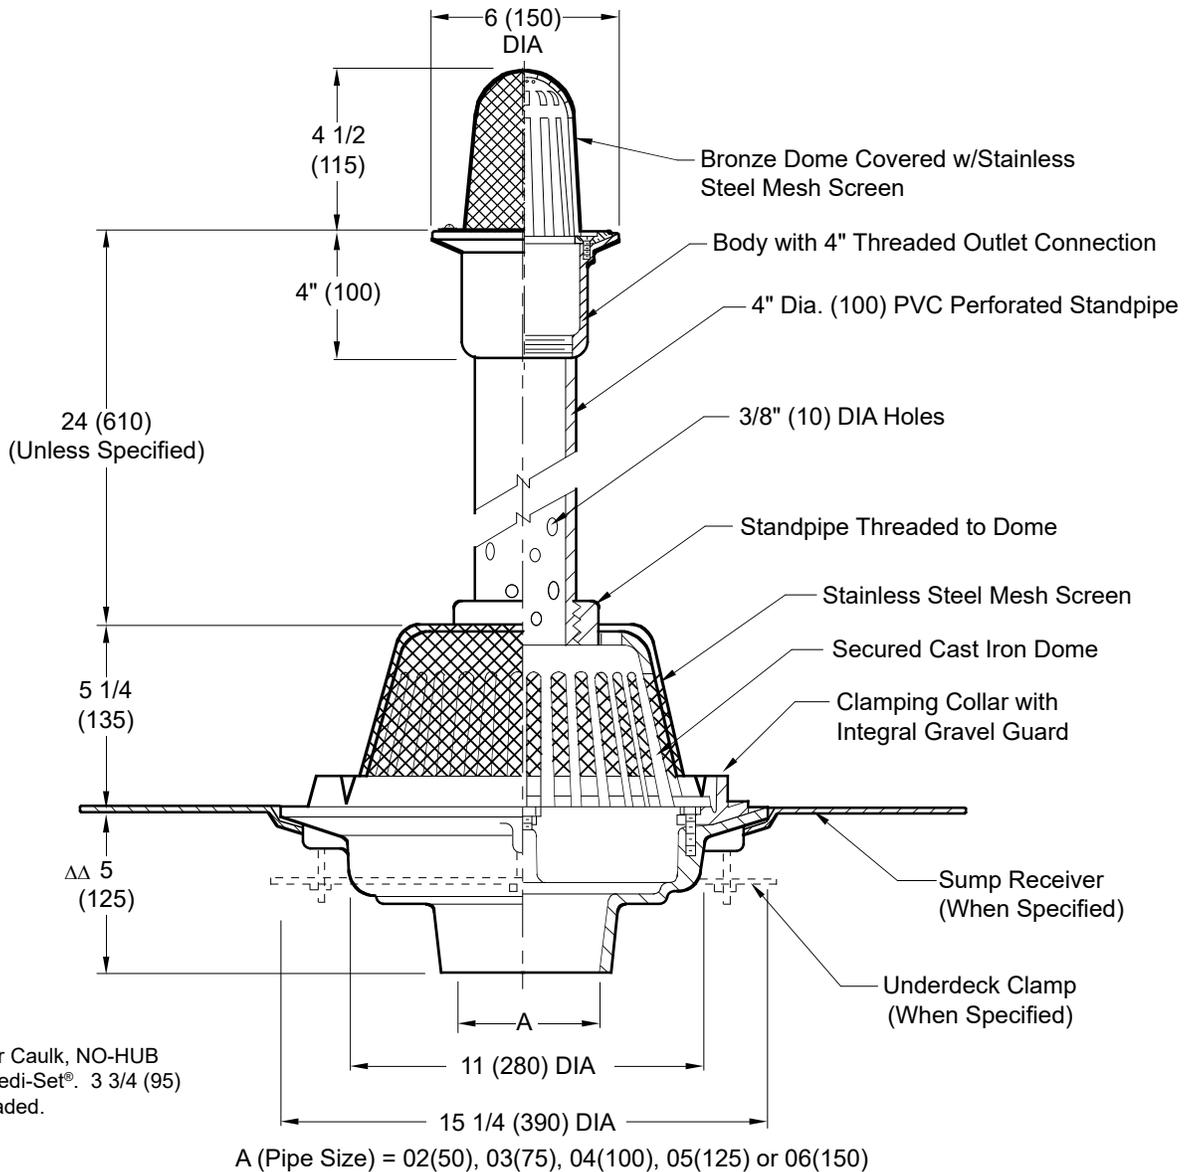

ΔΔ Same for Caulk, NO-HUB and Speedi-Set®. 3 3/4 (95) for Threaded.

- Fig. 1905C . . . CAULK Outlet
- Fig. 1905T . . . THREADED Outlet
- Fig. 1905Y . . . NO-HUB Outlet

REGULARLY FURNISHED:

Duco Cast Iron Upper Body with Flashing Clamp, Secured Bronze Dome with Stainless Steel Mesh Screen.
 Duco Cast Iron Lower Body with Combined Flashing Clamp and Gravel Stop with Cast Iron Dome Covered with Stainless Steel Mesh Screen with Dome Modified to Accept PVC Threaded Standpipe, Height as Required.

VARIATIONS:

- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Roof Deck Plate -RDP

OPTIONS:

- Galvanized Cast Iron -G
- Upper Drain as Specified.
- Stainless Steel Mesh Screen over Perforated Standpipe.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER s1905
 SIZE A
 SCALE: NONE
 DATE: 10-24-02
 APPROVED BY: BW
 CHECKED BY: ECW
 DRAWN BY: RN
 FIGURE NUMBER 1905
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	2-18-25	Revised Reg. Furnished	HS	CL			1905
D	9-27-24	Revised Variations	HS	CL			
C	04/19/10	Added 24 unless specified	JJ	TK			
B	03/25/10	Removed SQ note	JJ	TK			