

CD Series**Covert Access Doors**

Covert Access Doors are designed to be architecturally pleasing with a design which allows the door and frame to blend seamlessly with the gypsum ceiling. With a tapered edge for joint tape, they are easily textured, light weight and will not crack or shrink.

Door and Frame are fabricated from solid surface material and conforms with ANSI/CPA SS-1 Performance Standard. Color is OCC11M Blanco Matte. Can be painted.

Flange has depressions for screw placement and is tapered for joint compound application. Wall mounting hardware is provided by installer to suit wall type.

Guide Specification

Provide Elmdor CD series covert access door (specify model number). Access door and frame shall be fabricated from solid surface material. Frame shall have pre-positioned depressions for screw placement and tapered for application of joint compound.



Member of U.S. Green
Building Council



Updated: 01/07/2025

Recyclable
Product



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER


CD Covert Access Door

Suffix Options

"No Available Options"

STANDARD AVAILABLE SIZES

NOMINAL DOOR SIZE (W X H)	ROUGH OPENING	WEIGHT
12" x 12"	18" x 18"	13 lbs.
16" x 16"	22" x 22"	19 lbs.
18" x 18"	24" x 24"	23 lbs.
24" x 24"	30" x 30"	35 lbs.

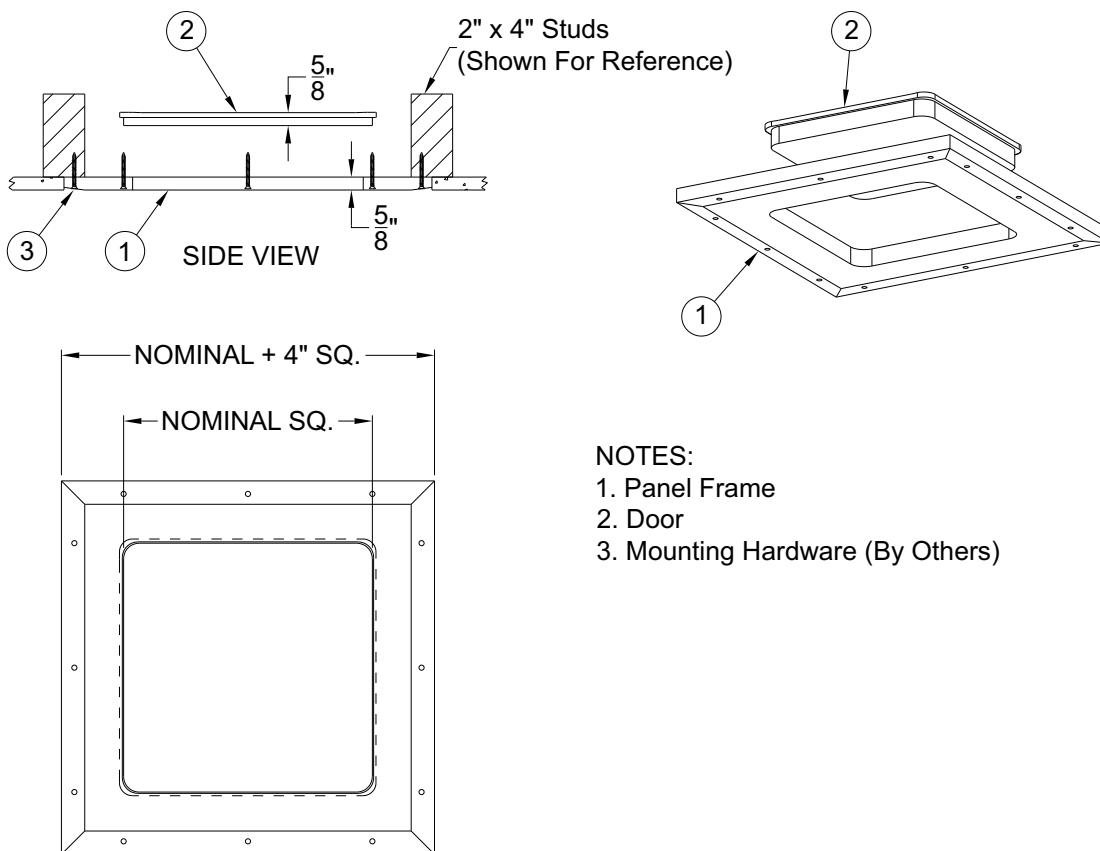

NOTES:

1. Panel Frame
2. Door
3. Mounting Hardware (By Others)

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

CD

Updated: 01/07/2025