
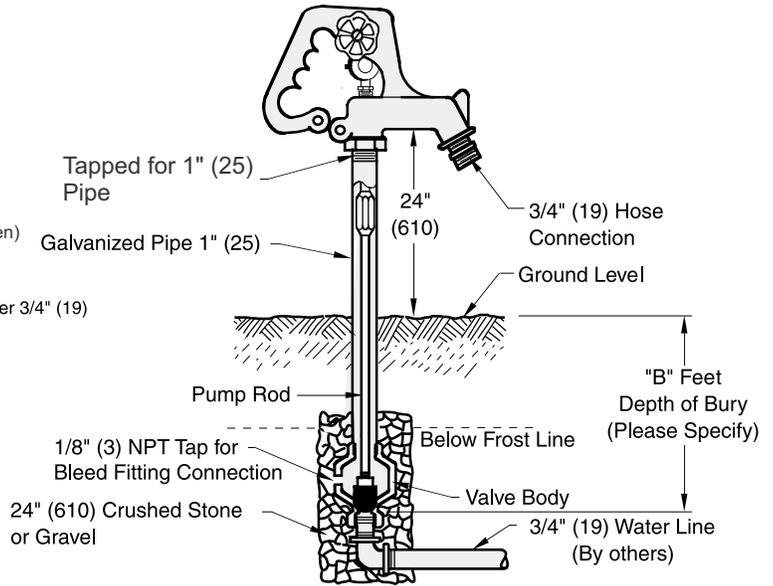


**NON-FREEZE POST HYDRANT**

**FUNCTION:** Used where an above ground water outlet is required in areas which are subject to freezing temperatures. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off.

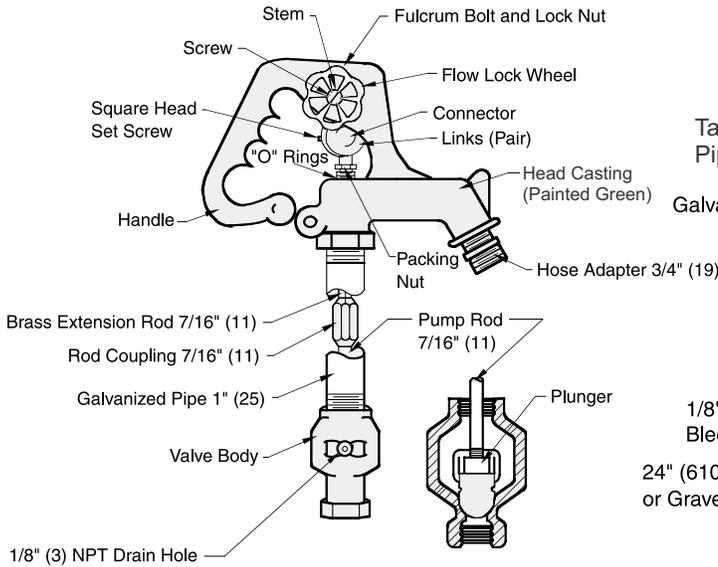

B (Depth of Bury) = 02(610), 03(915), 04(1220), 05(1525) or 06(1830) Feet

**NOTE:**

- \*1. Addition of vacuum breaker will not allow draining of the casing. Murdock Mfg. is not responsible for any casings that burst or related incidents if the hydrant is supplied with a vacuum breaker.
- 2. Public Law 111-380, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to Murdock Mfg. hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
- 3. Dimensions shown in parentheses are in millimeters.
- 4. FOR IRRIGATION PURPOSES ONLY.

**REGULARLY FURNISHED:**

Non-Freeze Post Hydrant with Galvanized Casing and Adjustable Flow Wheel Lock Handle.

**VARIATIONS:**

- Vacuum Breaker -H
- 1\"/>

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

*All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*