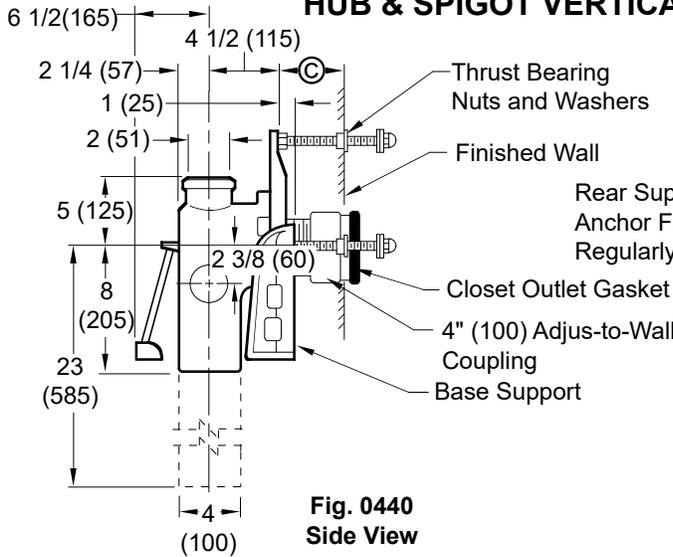
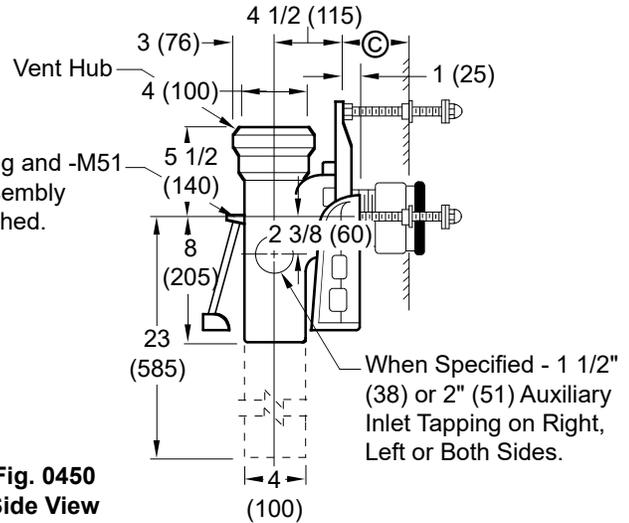


# COMPACT FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS


## HUB & SPIGOT VERTICAL CENTER LINE FITTINGS



**Fig. 0440  
Side View**



**Fig. 0450  
Side View**

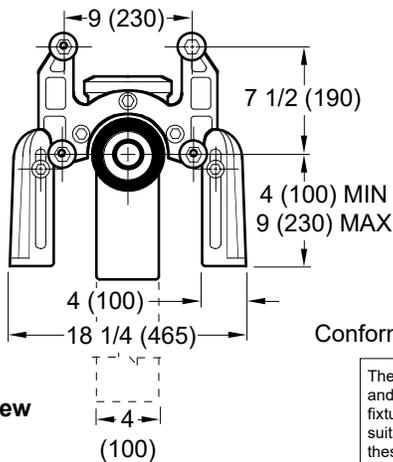

**Front View**

- WITH 2" (51) VENT
  - Fig. 0440 . . . CAULK
  - Fig. 0447 . . . CAULK LONG BARREL
- WITH 4" (100) VENT
  - Fig. 0450 . . . CAULK
  - Fig. 0457 . . . CAULK LONG BARREL

**NOTE:** Base support must be securely fastened to floor with four 1/2" (13) bolts provided by contractor.

**NOTE:** When used with concealed flush valve, locate face plate behind supply pipe.

Conforms with the requirements of ASME A112.6.1M up to 500 lbs (227 kg) static live load.

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1995, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.


### © DIMENSION - ADJUS-TO-WALL TYPE OUTLET CONNECTION

The Smith Adjus-to-Wall outlet connection provides adjustment at the face of the wall at the time the fixture is set; thus, compensating for wall construction variations. The © dimension is measured from the front of the face plate to the finished wall. To properly determine the length of nipple required, deduct 1" (25) from the © dimension. The Adjus-to-Wall coupling will provide 1/2" (13) horizontal adjustment in either direction with the coupling extended 5/16" (8) past face of the finished wall.

© dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3" (76) min. to 4" (100) max.

\*ABS (Regularly Furnished) other lengths PVC.

**NOTE:** Dimensions shown in parentheses are in millimeters.

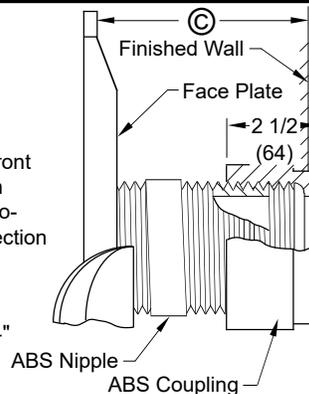

### NIPPLE LENGTHS AVAILABLE

LENGTH	MIN	©	MAX
2 1/2 (64)	2 1/4 (57)	3 1/4 (83)	
*3 1/4 (83)	3 (76)	4 (100)	
*8 1/4 (210)	8 (205)	9 (230)	
10 (255)	9 3/4 (250)	10 3/4 (275)	
12 (305)	11 3/4 (300)	12 3/4 (325)	
15 (380)	14 3/4 (375)	15 3/4 (400)	
18 (455)	17 3/4 (450)	18 3/4 (475)	

**NOTE:** When nipple lengths between 3 1/4" (83) and 8 1/4" (210) are specified, the 8 1/4" (210) nipple will be supplied. Nipple must be cut to specified length by others.

DRAWING NUMBER  
**S0440**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**1-3-85**

APPROVED BY:  
**JD**

CHECKED BY:  
**VGD**

DRAWN BY:  
**VGD**

**0440,0450**

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY
J H G F	4-17-24 09/03/10 7-1-98 1-27-98	Added ASME Note Corrected View of Rear Support Submittal Update Chg'd Callout	HS JJ ASL EMB	JT CL BS BS

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		<b>0440,0450</b>