


PROMENADE DECK DRAINS

SMALL - 8" (205) SQUARE

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
 19 SQ IN
 (123) SQ CM

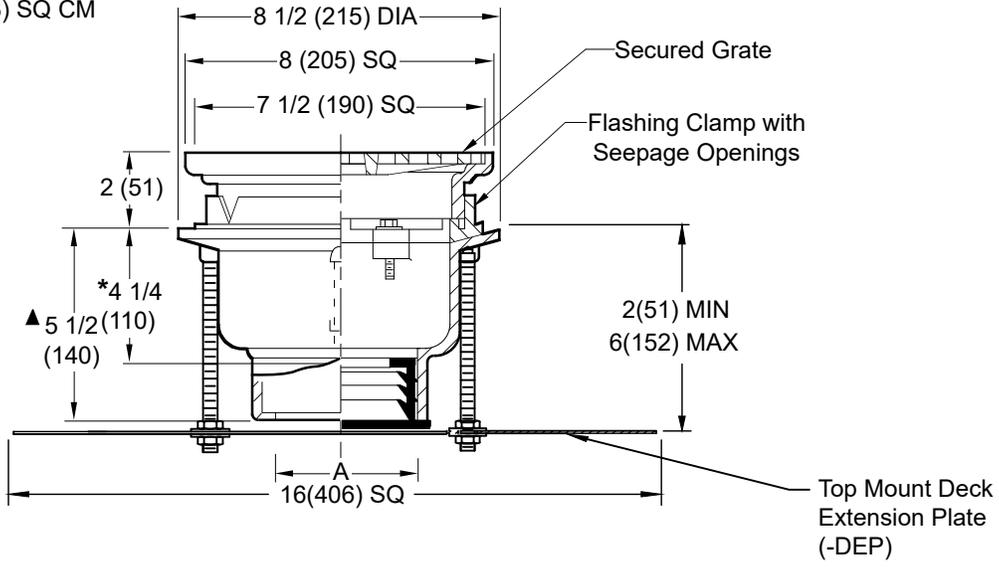

- Fig. 1470C-DEP CAULK OUTLET
- Fig. 1470Y-DEP NO-HUB OUTLET
- Fig. 1470T-DEP THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening
9(230) DIA

*This Dimension to Internal Stop of Speedi-Set® Gasket.
 ▲ Same for Caulk, NO-HUB and Speedi-Set® 4 1/4(110) for Threaded.

REGULARLY FURNISHED:
 Duco Cast Iron Body with Top Mount Deck Extension Plate and Flashing Clamp with Seepage Openings and Secured Square Hole Light Duty ADA Grate.

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: Floor drains or area drains, when used to drain exterior areas (subject to rainfall) should have an open area equal to twice the cross sectional area of the connecting pipe.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Secondary Flashing Clamp -C2
- Vandal Proof Grate -U
- Heel Proof -HP
- Bucket -B

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

DRAWING NUMBER
S1470-DEP

SIZE
A

SCALE:
NONE

DATE:
2-6-24

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
HS

1470-DEP

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSIZED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	A	5-9-25	Revised Variations	TB	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	REV.	DATE	DESCRIPTION	BY	CKD. BY			1470-DEP