


B  
 DRAWING NUMBER 1330DS-CAN  
 SIZE A  
 SCALE: NONE  
 DATE: 2-8-93  
 APPROVED BY:  
 CHECKED BY: TWK  
 DRAWN BY: TWK  
 1330DS-CAN  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

## SPECIAL PURPOSE ROOF DRAIN FOR CONVENTIONAL INVERTED PROMENADE DECK ROOF

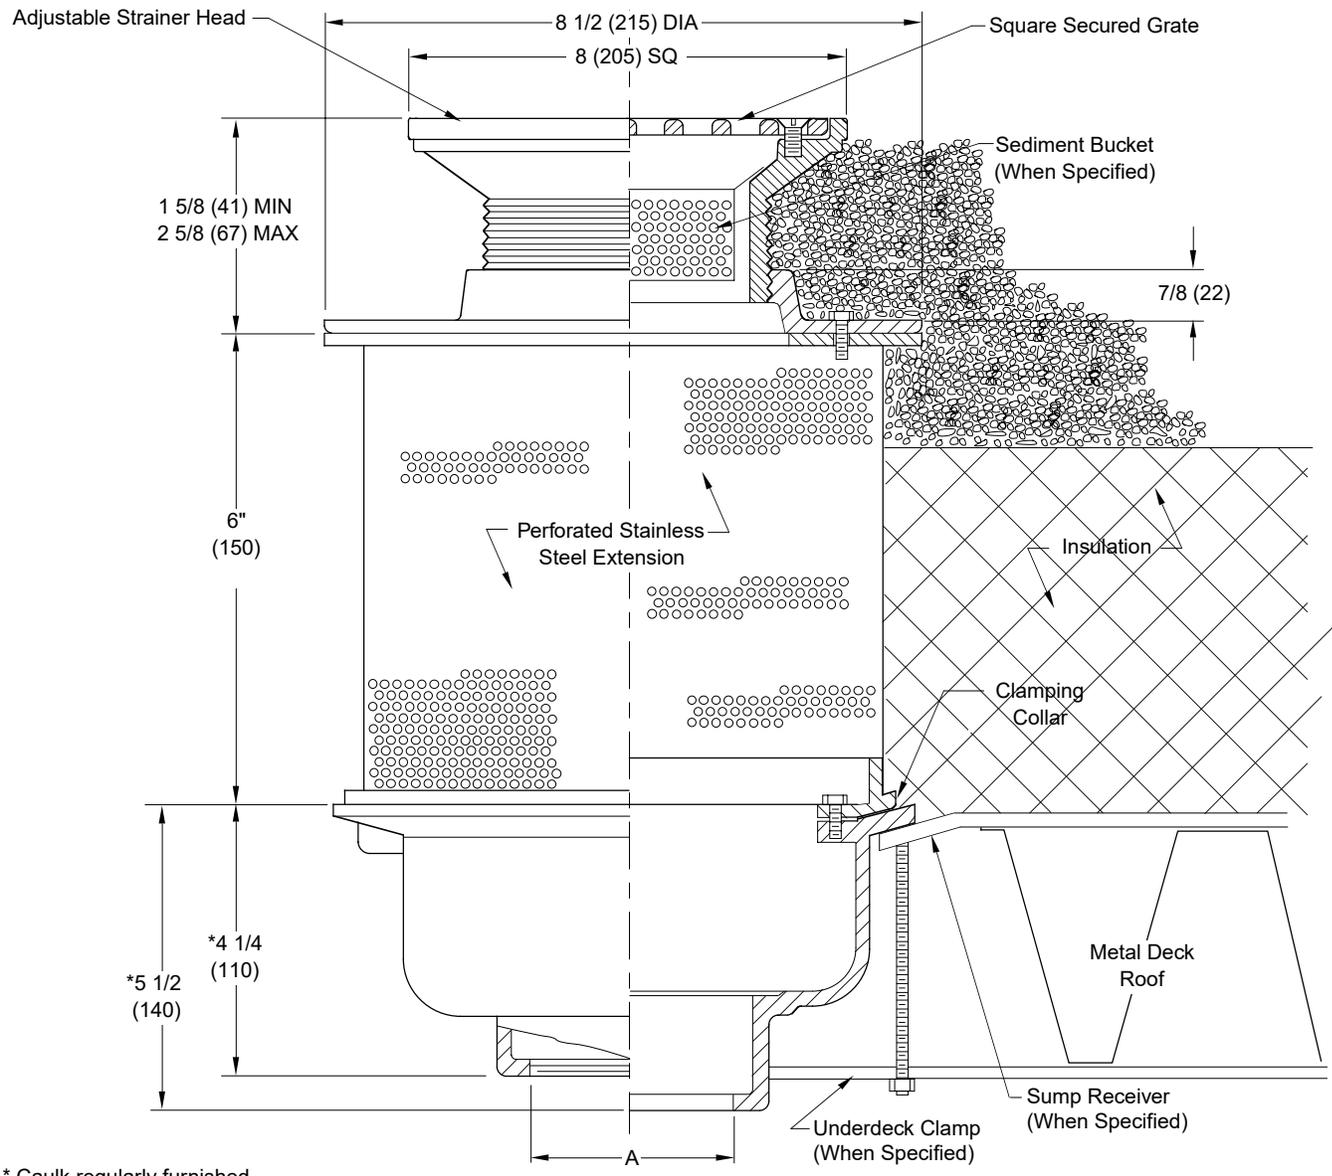

\* Caulk regularly furnished.  
 5 1/2" (140) is applicable for caulk and NO-HUB (-Y). 4 1/4" (110) is applicable for threaded.

A(Pipe Size) = 2(50), 3(75), 4 (100), & 6(150)

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body and Flashing Collar with Adjustable Nickel Bronze Strainer Head, Secured Grate and Perforated Stainless Steel Extension.

- VARIATIONS:**
- Galvanized -G
  - Sump Receiver -R
  - Polished Bronze Strainer -PB
  - Sediment Bucket -B
  - Underdeck Clamp -C
  - Higher Extension (Specify Height)

	B A	10-12-23 8-25-98	Removed Function Revised	HS CMD	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>1330DS-CAN</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY				