

SOLIDS INTERCEPTORS

SUSPENDED TYPE

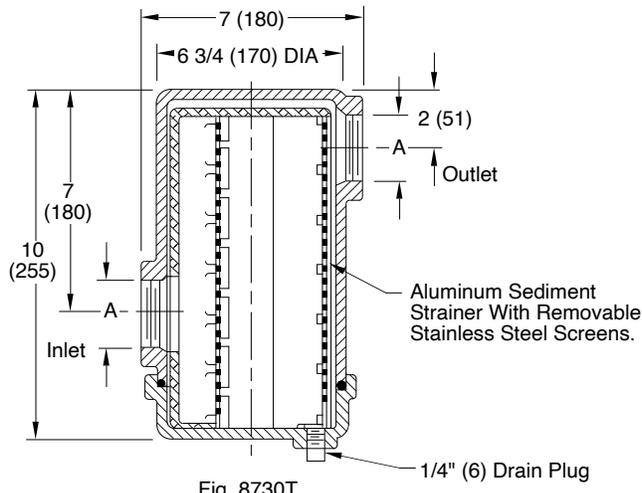



Fig. 8730T
A (Pipe Size) = 0150 (40) or 02 (50)

NOTE: Allow 8 1/2" (215) below interceptor for removal of strainer.
NOTE: It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location.

REGULARLY FURNISHED:
 White Duco Coated Cast Iron Body and Aluminum Strainer with Removable Stainless Steel Screens.

- OPTIONAL MATERIALS:**
- Acid Resistant Coating Inside - ARI
 - Acid Resistant Coating Outside - ARO
 - Acid Resistant Coating Inside and Outside - ARIO
 - Aluminum Body - AA
 - All ABS (Specify Fig. 8730-ABS)

TYPICAL INSTALLATION



SUSPENDED TYPE INSTALLATION

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: **8730**
 SIZE: **A**
 SCALE: **NONE**
 DATE: **12-11-84**
 APPROVED BY: **KG**
 CHECKED BY: **VGD**
 DRAWN BY: **PJ**
 FIGURE NUMBER: **8730**
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		D 7-28-23 Removed Function C 7-11-03 Revised Optional Materials B 3-14-96 Added Millimeters A 9-14-94 Submittal Update	HS RN EMB CMB	CL CL BS BS			8730