MURDOCK-SUPER SECUR RESTROOM FIXTURE
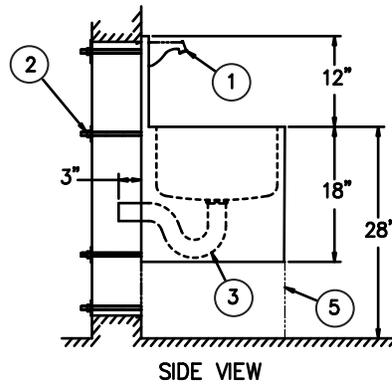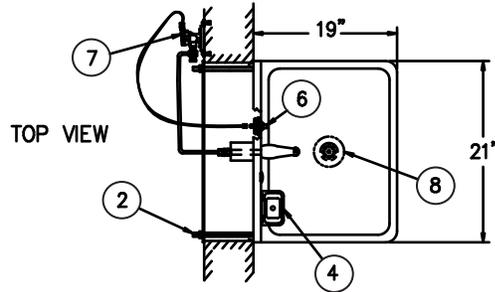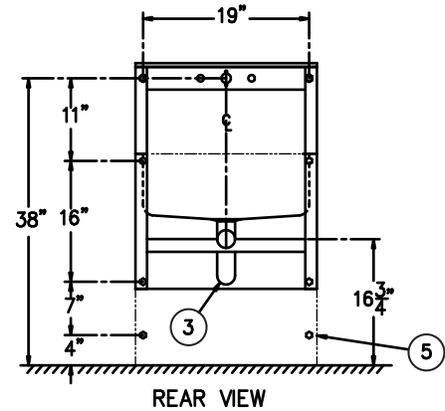
MODEL #
1051

SERVICE SINK

ITEM	DESCRIPTION	QTY
1	FILLER SPOUT (—SH)	1
2	MOUNTING HARDWARE	1
3	P–TRAP W/ 2–3/8" O.D. OUTLET	1
4	OPTIONAL SOAP DISH	1
5	FLOOR MOUNTED OPTION	1
6	PUSHBUTTON ASSY	1
7	AIR CONTROL VALVE	1
8	INTEGRAL GRID STRAINER	1

TOP VIEW

19"

21"

Note: Fixture may show some available options

SIDE VIEW

12"

3"

18"

28"

REAR VIEW

19"

11"

38" 16"

7"

4"

16 3/4"

TECHNICAL DATA:

Fixture is designed to be installed on a finished wall and serviced from an accessible pipe chase. Fixture is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish. Rectangular bowl is 19" x 16" x 10" deep.

Valve is an Air-Control, pneumatically operated pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve includes a 2.5 GPM flow control and may be located up to 10 feet from the operating pushbutton.

Regularly furnished items include valve, spout with hose end, integral grid strainer, integral P-trap and mounting hardware for walls up to 8" thick.

MODEL NUMBER:

❏ 1051-1   Service Sink with Cold Only Valve
❏ 1051-2   Service Sink with Hot and Cold Valve

PRODUCT OPTIONS:

❏ -EG   Enviro-Glaze (for color selection see flier)
❏ -D   Soap Dish
❏ -FM   Floor-Mounted

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options_____ Quantity_____

Company_____

Contact_____ Title_____

Signature
(Approval for
Manufacturing)_____ Date _____