



**Whitehall Manufacturing**  
 Manufacturer of Healthcare and Rehabilitation Products since 1946

**BestCare**  
 Patients, Not Prisoners

**Healthcare and Ligature  
 Resistant Products**

Division of  
 Acorn Engineering Company



A MEMBER OF



## Whitehall Ligature Resistant Dual Temperature Sensor Activated Faucet 4" Centerset

Model WH3375-HC-SO



WH3375-HC-SO

Fixture May Show Some Available Options

### Ligature Resistant Dual Temperature Sensor Activated Faucet 4" Centerset with Auto-Purge Feature

**The Ligature Resistant Sensor Activated Faucet** is recommended for patient bathrooms and facilities where at risk accommodations are a concern. The faucet is designed to retrofit onto existing 4" centerset lavatory decks with 3-hole openings providing Ø1" minimum to Ø1-1/2" maximum holes; or can be specified with Whitehall BestCare ligature resistant lavatories. The faucet includes hand free dual temperature operation, made of chrome plated lead-free brass and intended to be vandal resistant.

**Auto-Purge Sensor** function is provided to ensure fresh water supply for hand washing by activating Faucet for 10 second duration 24 hours after last activation (standard Factory setting). Optional -AP Remote Controller also allows for additional Purge Cycle and Sensor range adjustments ([LINK](#)).

**Valve** is an electronic valve with dual sensor activation. Valve includes 9VDC Sensor that will keep the solenoid open, allowing water to flow until the object is removed from sensor range. If an object is positioned in a manner that it is under constant detection, the sensor will turn off the solenoid after 10 seconds. A 120VAC/9VDC plug-in transformer or a 6 AA Battery Box is provided. Batteries are not included.

**Spray nozzle** is non-splashing, non-aerated, multi-stream with a 0.5 GPM flow control.

**Optional WHST70-12 Mixing Valve** option is ASSE 1070 compliant and delivers tempered water flow by compensating for pressure and temperature fluctuations. Valve is to be field set to 105° Fahrenheit and includes strainers and integral checks. Operating range is 30 to 100 PSI.

**Optional -LFK Laminar Flow Restrictor Kit** to increase flow rate of Faucet. Kit includes Spanner Wrench to remove existing Nozzle and three different Laminar Flow Restrictor replacements providing 1.2 GPM, 1.5 GPM, and 1.75 GPM.

**Fixture is ADA Compliant.** Unit conforms with ADA requirements for accessibility when correctly installed. Compliance is subject to the interpretation and requirements of the local code authority.

### GUIDE SPECIFICATION

Provide and install Ligature Resistant Faucet (specify model number and options). Faucet valve shall be electronic, dual sensor activation and include Auto-Purge feature. Assembly shall include 0.5 GPM flow control, multi-stream laminar spray nozzle, 9VDC sensor and faucet connections.

Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.



Recyclable  
 Product



Water  
 Conserving  
 Product

Complies  
 with the  
 following  
 standards:



Federal  
 Public Law  
 111-380  
 (No Lead)



Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 782-7706 • (626) 968-6681

**WH3375-HC-SO**

Revised: 04/23/2025



**MODEL NUMBER AND OPTIONS SELECTION:**

**BASE MODEL NUMBER**

(Use The Following For Basins Manufactured By Others)




- WH3375-HC-SO      Ligature Resistant Sensor Activated Spout w/ Electronic Valve, Dual-Temp
- WH3375-HC-SO-BAT      Ligature Resistant Battery Powered, Sensor Activated Spout w/ Electronic Valve, Dual-Temp (Batteries not included)

(Use The Following For Whitehall BestCare® Basins)

- WH3375L-HC-SO      Ligature Resistant Sensor Activated Spout w/ Electronic Valve, Dual-Temp
- WH3375L-HC-SO-BAT      Ligature Resistant Battery Powered, Sensor Activated Spout w/ Electronic Valve, Dual-Temp (Batteries not included)

**ACCESSORIES:**


- AP      Auto-Purge Sensor Function Remote Controller ([LINK](#))
- LFK      Laminar Flow Restrictor Kit (Provides 1.2 GPM, 1.5 GPM, and 1.75 GPM Flow Controls)
- WHST70-12      1/2" NPT ASSE 1070 Compliant Hot & Cold, Temperature / Pressure Balancing Mixing Valve

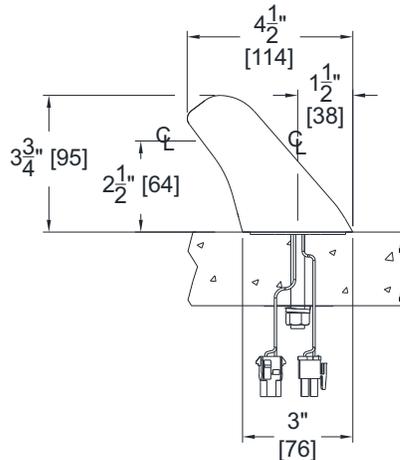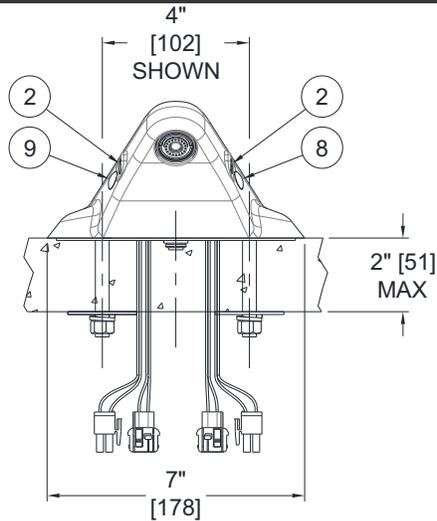

**OPTIONAL -BAT BATTERY  
 OPERATION DETAIL  
 (BATTERIES NOT INCLUDED)**

**NOTES:**

1. LIGATURE RESISTANT SPOUT
2. 9VDC INFRARED SENSOR
3. 9VDC SOLENOID DUAL-TEMP VALVE ASSEMBLY
4. CHECKSTOP/STRAINER ASSEMBLY
5. 1/2" NPS INLET FLEX HOSE
6. 9VDC PLUG-IN TRANSFORMER
7. BATTERY PACK (OPTIONAL)
8. BLUE (COLD) TEMPERATURE INDICATOR
9. RED (TEMPERED) TEMPERATURE INDICATOR
10. WIRING HARNESS

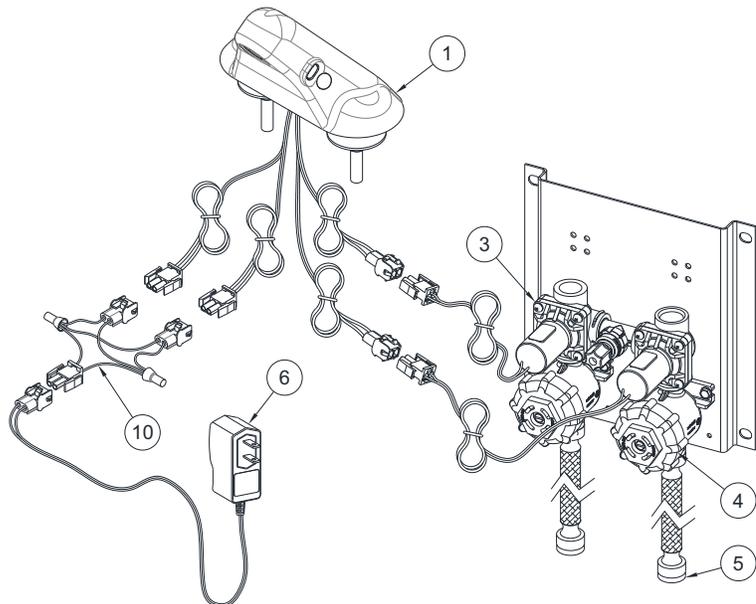

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.