

DRAWING NUMBER	S1479-CAN
----------------	------------------

SIZE	A
------	----------

SCALE:	NONE
--------	-------------

DATE:	3-1-01
-------	---------------

APPROVED BY:	
--------------	--


CHECKED BY:	
-------------	--

DRAWN BY:	rn
-----------	-----------

1479-CAN	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
-----------------	---

PROMENADE DECK DRAINS

PROMENADE DECK DRAIN FOR SPECIAL ROOF APPLICATIONS

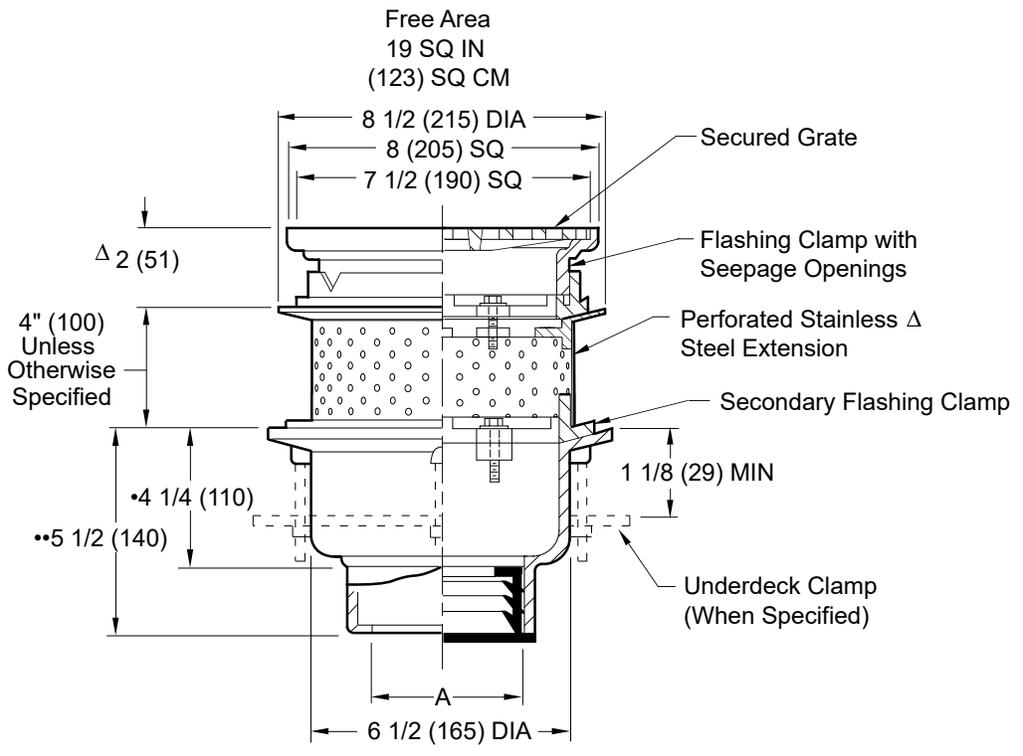

- This Dimension to Internal Stop of Speedi-Set Gasket.
- Same for Caulk, NO-HUB and Speedi-Set. 4 1/4(110) for Threaded.
- ΔAdd 1/4 "(6) when bronze top is specified.

A (Pipe Size) = 02(50), 03(75), 04(100)

- Fig. 1479C-CAN CAULK OUTLET
- Fig. 1479Y-CAN NO-HUB OUTLET

Δ **NOTE:** Extensions 4"(100) and Higher are Regularly Furnished Perforated Stainless Steel. Extensions Less Than 4"(100) are Regularly Furnished Cast Iron with 2 Rows of Seepage Holes.

REGULARLY FURNISHED:
 Duco Cast Iron Body, Perforated Stainless Steel Extension with Secondary Flashing Clamp, Cast Iron Top Frame and Secured Square Hole Light Duty ADA Grate.

NOTE: Floor drains or area drains used to drain areas subject to rainfall should have an open area equal to twice the cross sectional area of the connecting pipe.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - Extension -E (Specify Height)
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set Service Weight
 - LXH Speedi-Set Extra Heavy
 - Secondary Flashing Clamp -C2
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Grate -U
 - T Threaded Outlet

recommended deck opening

with suffix-R	9(230) DIA
less suffix-R	7 3/4(195) DIA

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	1479-CAN	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER	1479-CAN
REV.	DATE	DESCRIPTION	BY	CKD. BY	
B A	10-12-23 1-19-23	Removed Function Updated Reg. Furnished	HS KK	CL CL	