

## Pet Fountain Series

### MODEL M-PM54

PET WASH WITH DUAL HOSE CONNECTIONS AND HOSE HOLDER

#### STANDARD FEATURES

- 100 mesh inlet strainer
- Hose holder (hoses furnished locally)
- Pushbutton requiring less than 5 pounds for activation
- Metering air control valves timing adjustable from 5 to 60 seconds
- Dual 3/4" hose outlets include vacuum breakers
- Vandal resistant stainless steel access panel
- Heavy duty, 304 stainless steel polished to a satin finish

#### SUGGESTED SPECIFICATIONS

Pet fountain shall be Murdock model M-PM54, dual hose connection with hose holder.

Valves shall be internally mounted metering valves, pushbutton operated and requires less than 5 pounds of force to activate. Timing can be adjusted from 5 to 60 seconds. Unit shall operate on a water pressure range of 30-100 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish. Bottom plate shall be 3/16" thick and include four mounting holes. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM54

#### MODEL:

(Must Specify)

- M-PM54 Satin stainless finish (Shown)
- M-PM55 Green powder-coat
- M-PM56 Red powder-coat
- M-PM57 Blue powder-coat

Custom color finishes available upon request

#### OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve <sup>1</sup>
- IAP In-ground anchor plate <sup>1</sup>
- LOGO Customer Specified logo <sup>1</sup>

Options Notes:

<sup>1</sup> See separate option sheet.

Complies with the following standards:




**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# Pet Fountain Series

**MODEL M-PM54**

**PET FOUNTAIN WITH DUAL HOSE BIBB  
AND HOSE HOLDER**

\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 psi.

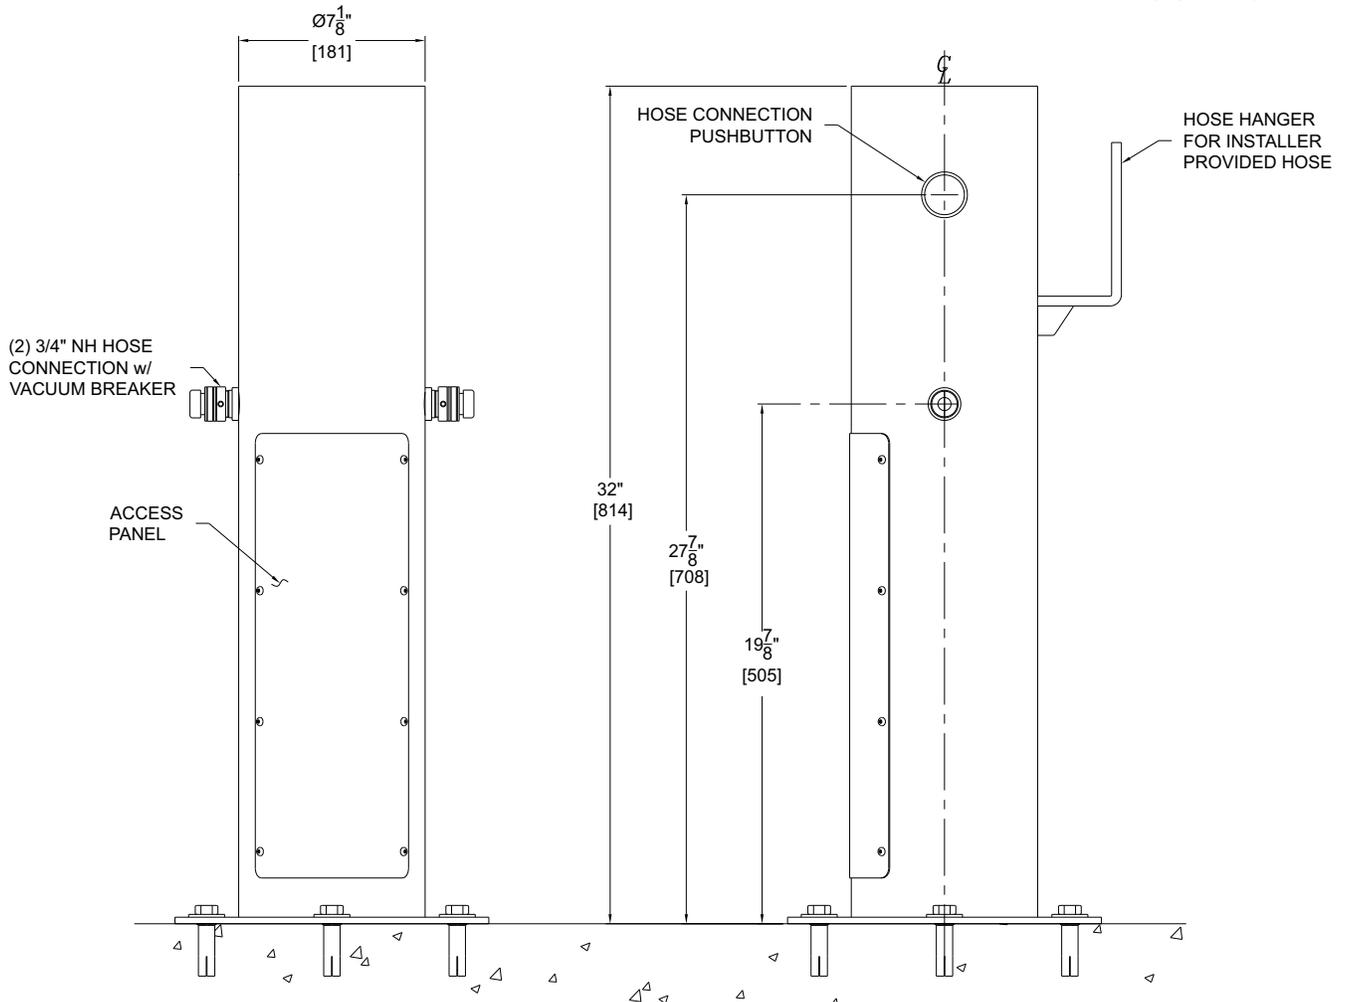

GENERAL NOTES:  
1. ALL DIMENSIONS ARE IN INCHES [MM].

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufacturer's tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock <sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock <sup>®</sup> Mfg., Member of Morris Group International <sup>®</sup> . Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	