


VERTICAL OFFSET WASTE FITTING

FOR USE WITH FLOOR MOUNTED BACK OUTLET CLOSET

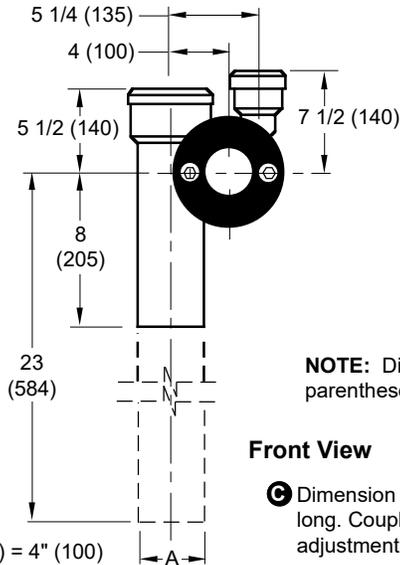


NOTE: Dimensions shown in parentheses are in millimeters.

Front View

Ⓢ Dimension is regularly finished 4" (100) long. Coupling provides 3/4" (19) adjustment in either direction.

A (Pipe Size) = 4" (100)

- Fig. 0675L . . . LEFT HAND
- Fig. 0675R . . . RIGHT HAND (SHOWN)
- Fig. 0675D . . . DOUBLE
- Fig. 0688L . . . LEFT HAND LONG BARREL
- Fig. 0688R . . . RIGHT HAND LONG BARREL
- Fig. 0688D . . . DOUBLE LONG BARREL

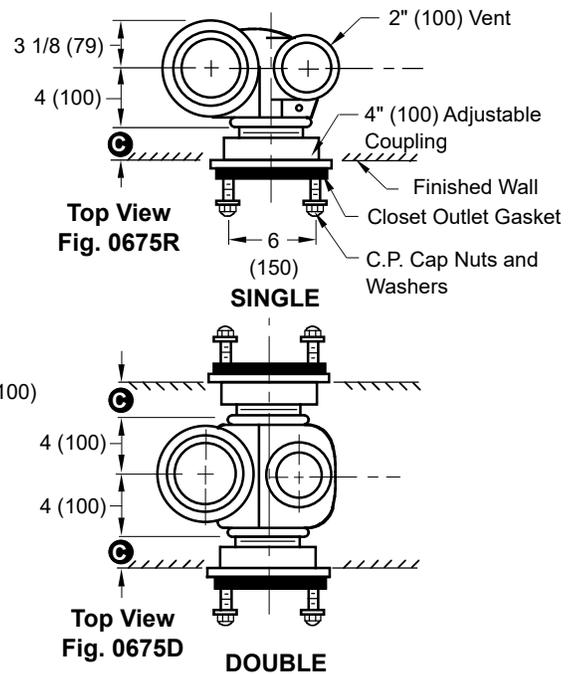

Top View Fig. 0675R

SINGLE


Top View Fig. 0675D

DOUBLE


Conforms to ASME A112.6.1M

The water closet gasket regularly furnished is designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

TYPICAL APPLICATION



OUTLET CONNECTIONS

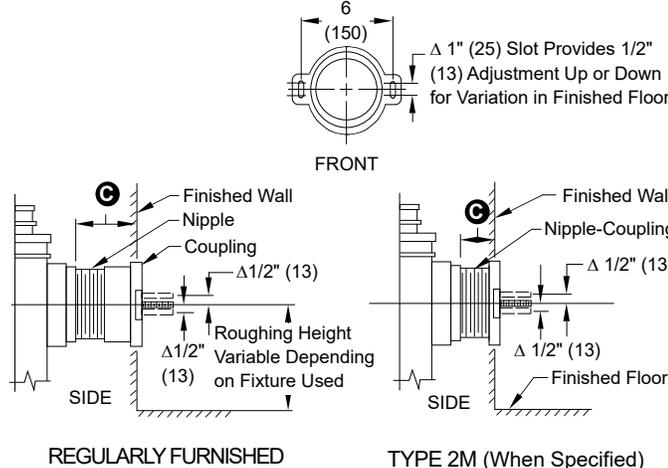

NIPPLE LENGTHS AVAILABLE

NIPPLE LENGTH	MIN	Ⓢ	MAX
2M	1 (25)		3 (76)
*2 1/2 (64)	2 3/4 (70)		3 3/4 (95)
3 1/4 (83)	3 (76)		4 1/2 (115)
4 1/2 (115)	4 1/4 (110)		5 3/4 (145)
5 1/4 (135)	5 (125)		6 1/2 (165)
6 1/4 (160)	6 (150)		7 1/2 (190)
7 (180)	6 3/4 (170)		8 1/4 (210)
8 1/4 (210)	8 (205)		9 1/2 (240)
10 (255)	9 3/4 (250)		11 1/4 (285)
12 (305)	11 3/4 (300)		13 1/4 (335)
15 (380)	14 3/4 (375)		16 1/4 (415)
18 (455)	17 3/4 (450)		19 1/4 (490)

* Regularly Furnished

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET
G	10-24-24	Revised Lengths	HS	CB		
F	4-17-24	Added ASME Note	HS	JT		
E	3-13-19	Added Notes	TBW	CL		
D	3-18-14	Revised Dimensions	TBW	CL		

FIGURE NUMBER
0675 and 0688
SERIES