


B
 DRAWING NUMBER
 SSQ-8-2180
 SIZE
 A
 SCALE:
 NONE
 DATE:
 8-30-98
 APPROVED BY:
 McD
 CHECKED BY:
 JM
 DRAWN BY:
 CMD
 SQ-8-2180
 FIGURE NUMBER

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com
CUSTOMER DRIVEN SINCE 1926



LOCATION

LARGE ANIMAL FUR/HAIR INTERCEPTORS

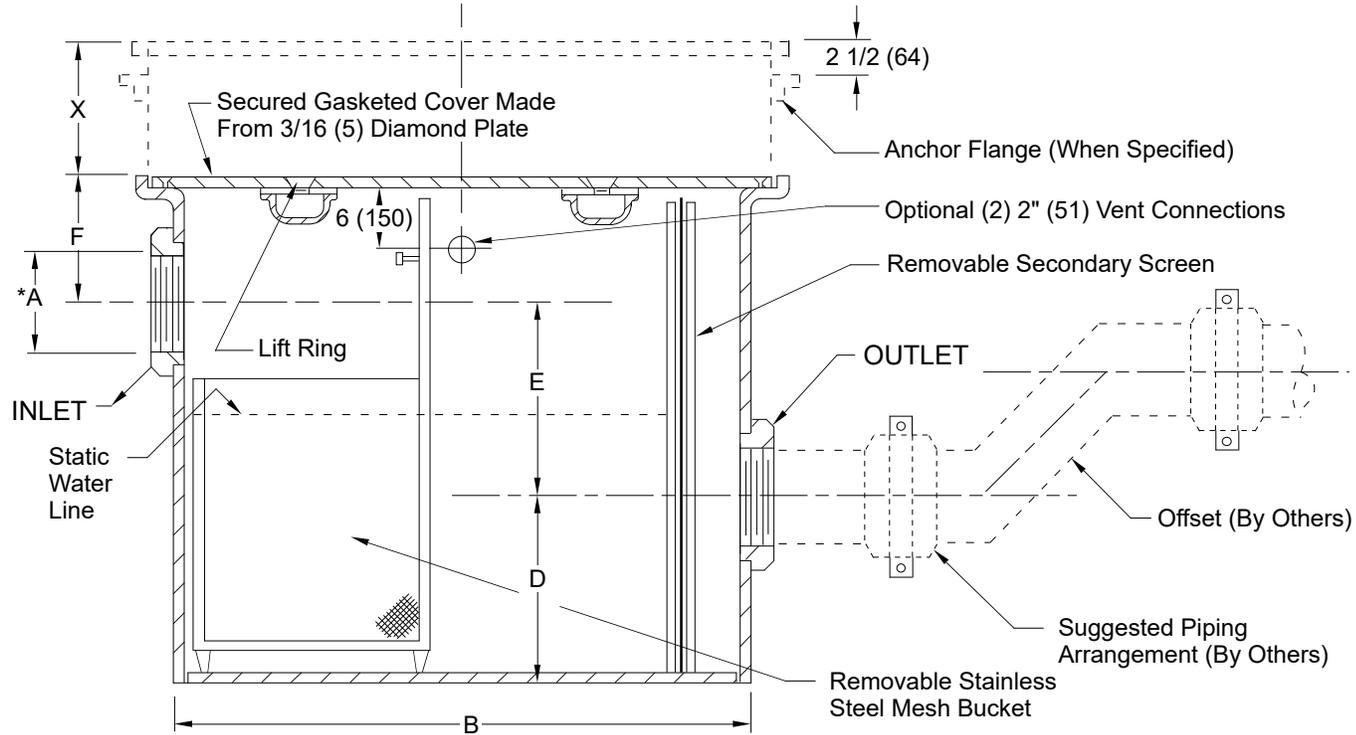

C = Body Width
 X = Specify Additional Height Required

NOTE: It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location.

Fig. No.	GPM Flow Rate	* Inlet & Outlet Size	Dimensions						Securing Screws In Cover
			Body			Roughing Dimensions			
			A	B	C	D	E	F	
SQ-8-2180	10	03 (75)	20 (510)	24 (610)	12 (305)	12 (305)	8 (205)	8	
SQ-8-2180	20	03 (75)	30 (760)	24 (610)	12 (305)	12 (305)	8 (205)	8	
SQ-8-2180	25	04 (100)	36 (915)	24 (610)	12 (305)	12 (305)	8 (205)	8	
SQ-8-2180	50	04 (100)	40(1015)	26 (660)	12 (305)	12 (305)	8 (205)	10	

*Specify larger or smaller inlets/outlets as required.

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:
 Fabricated Steel with Gray Duco Coating and Stainless Steel Mesh Bucket, Stainless Steel Secondary Screen, 3/16" (5) Diamond Plate Cover (Secured & Gasketed) and Threaded Inlet and Outlet.

- VARIATIONS:**
- All Stainless Steel Unit -SS
 - Anchor Flange -F
 - Extension -E Specify height eg: -E06 for 6"(150) Ext
 - Flashing Flange with Flashing Clamp -F-C
 - NO-HUB Inlet & Outlet Connection
 - Option (2) 2" (51) Threaded Vent Connections - VC

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		SQ-8-2180
REV.	DATE	DESCRIPTION
B A	10-12-23 9-20-12	Removed Function Revised Dimension
BY	HS TBW	CL CL
CKD. BY		