


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

8 1/2" (215) ROUND MEDIUM DUTY TOP WITH EXTENDED INTEGRAL FLANGE FOR WELDING TO STEEL DECKS

Free Area
 20.50 SQ IN
 (132) SQ CM

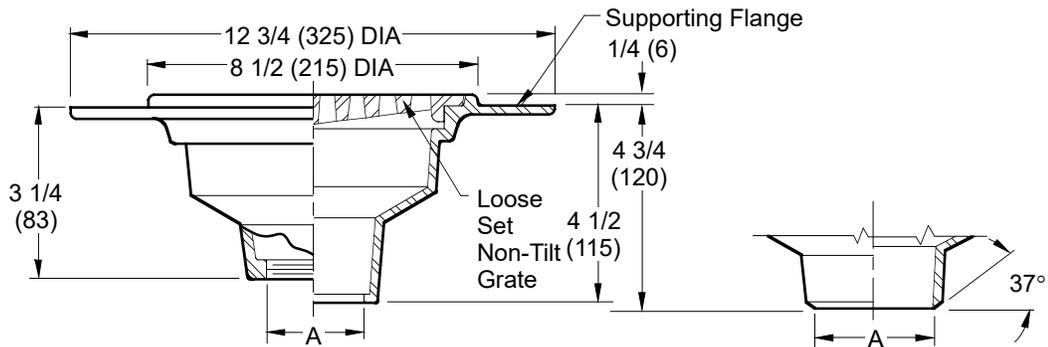

Butt Weld Outlet

Schedule 40 Regularly Furnished

A (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 9705C CAULK OUTLET
- Fig. 9705T THREADED OUTLET

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304)
 Rough Finish Stainless Steel
 Body and Loose Set Non-Tilt
 Grate.

VARIATIONS:

- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Satin Finished Top -SF
- Sediment Bucket -B
- Solid Scoriated Cover -SC
- Vandal Proof Grate -U
- For 90° Outlet (Specify Fig. 9759)
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent to Type 316) Stainless Steel -316
- Nickel Bronze Grate -NB
- Polished Bronze Grate -PB

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

G
 DRAWING NUMBER S9705
 SIZE A
 SCALE: NONE
 DATE: 11-12-84
 APPROVED BY: TD
 CHECKED BY: VGD
 DRAWN BY: P.J.
 9705
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | | | |
|------|--|--|-----------------------|----------------------|---------------|-------------------|---------------|
| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
| | 10-16-24 8-28-23 10-18-11 4-28-06 | Revised Variations Removed Function Added Note Revised Variations | HS HS TBW RN | JT CL CL CL | | | 9705 |