


HEEL-PROOF PROMENADE DECK DRAIN

WITH HEAVY DUTY FINISHED NICKEL BRONZE TOP

Designed for heel-proof safety, heavy load strength and attractive appearance.

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs. (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

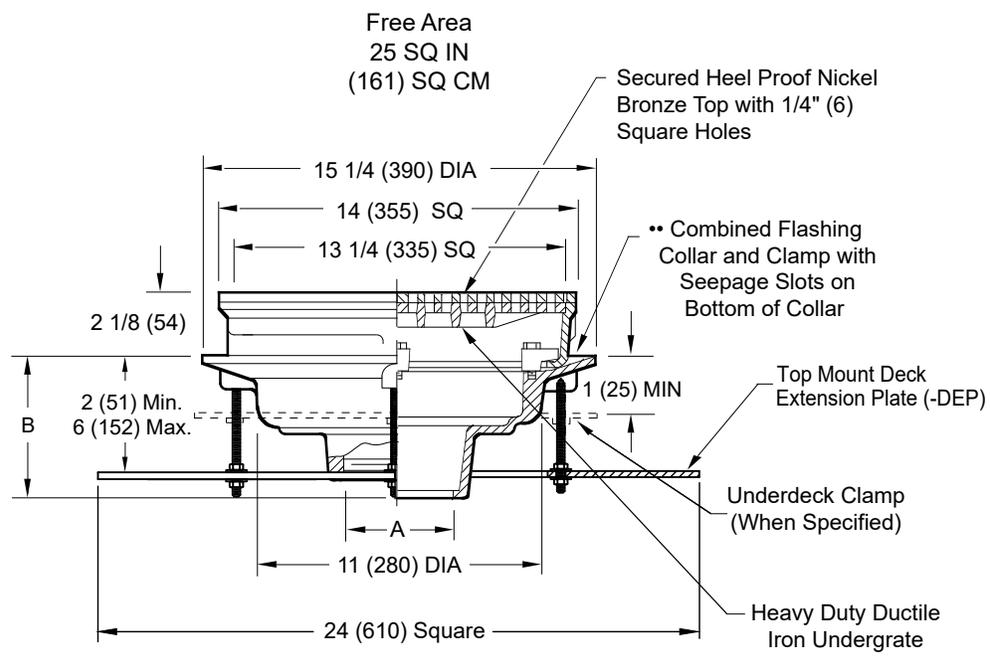

••Specify Suffix-W for Applications Requiring "Loose-Set" Pavers

- Fig.1412C-DEP . . . CAULK OUTLET
- Fig.1412T-DEP . . . THREADED OUTLET
- Fig.1412Y-DEP . . . NO-HUB OUTLET

A Size	B	
	Caulk, NO-HUB, & Speedi-Set®	Threaded
02(50),03(75),04(100), 05(125),06(150)	5 (125)	3 3/4 (95)

recommended deck opening	
with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body with Top Mount Deck Extension Plate, and Combined Flashing Collar and Clamp and Secured 1/4"(6) Square Hole Heel Proof Nickel Bronze Grate Veneered over Ductile Iron Undergrate.

- VARIATIONS:**
- Extension (Specify Height) -E
 - Expansion Joint (Specify Fig. 1710)
 - 3/8"(10) Dia. Holes -(8) Req'd -W
 - Vandal Proof Grate -U
 - L Speedi-Set® Service Weight
02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy
02(50), 03(75) & 04"(100) sizes only

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S1412-DEP
 SIZE: A
 SCALE: NONE
 DATE: 12-7-23
 APPROVED BY: CL
 CHECKED BY: CB
 DRAWN BY: HS
 1412-DEP
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

A	2-10-25	Rev. Free Area, Fig. Opts.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
REV.	DATE	DESCRIPTION	BY	CKD. BY			1412-DEP