


WATER DAM TYPE ROOF DRAIN

WITH ADJUSTABLE OVERFLOW AND PROTECTIVE DOME

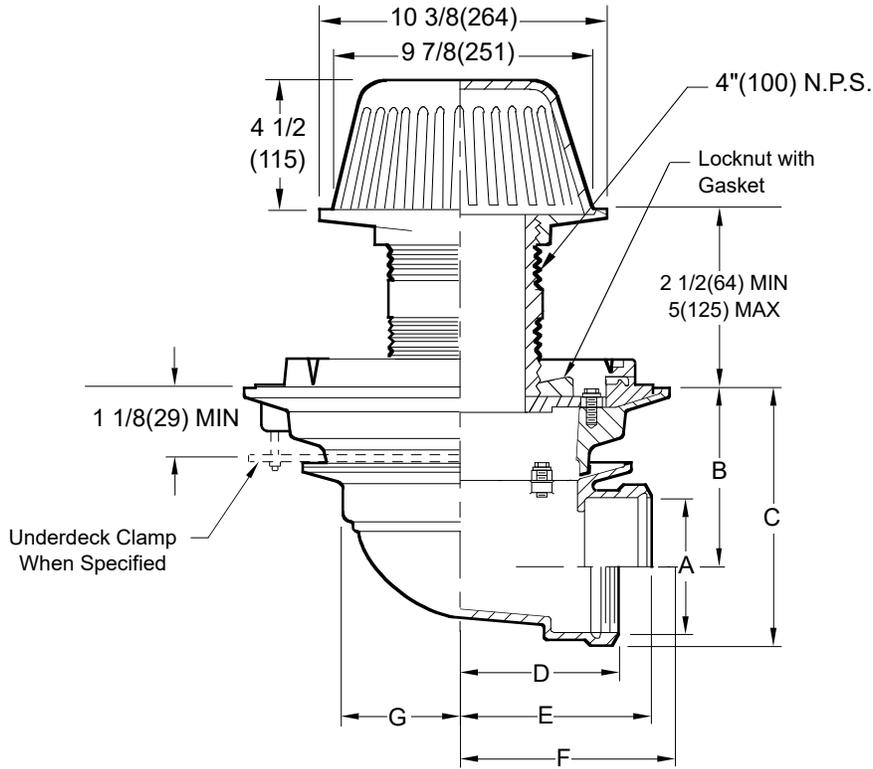

- Fig. 1075CCAULK OUTLET
- Fig. 1075TTHREADED OUTLET
- Fig. 1075YNO HUB OUTLET

A (Pipe Size) =02(50),03(75) or 04(100)

A	B	C	D THREADED	E CAULK	F NO HUB	G
2(50)	6 7/8(175)	8 5/8(219)	6(150)	10(254)	9(228)	4 3/4(120)
3(75)	6 3/8(162)	8 5/8(219)	6(150)	9 3/4(247)	9(228)	4 3/4(120)
4(100)	5 7/8(149)	8 5/8(219)	6(150)	9 3/4(247)	9(228)	4 3/4(120)

REGULARLY FURNISHED:
 Duco Cast Iron Body, Combined Flashing Collar and Gravel Stop with Adjustable Standpipe and Dome.

VARIATIONS:

- Extension (Specify Height) -E
- Secondary Flashing Clamp -C2
- Underdeck Clamp -C
- Sump Receiver -R

OPTIONAL MATERIALS:

- All Galvanized -G
- Bronze Dome -RBD
- Aluminum Dome -AD

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S1075

SIZE
A

SCALE:
NONE

DATE:
4-2-25

APPROVED BY:
KV

CHECKED BY:
KV

DRAWN BY:
HS

1075

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							1075