

C

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER
S9348

SIZE
A

SCALE:
NONE

DATE:
7-3-86

APPROVED BY:
SB

CHECKED BY:
JD

DRAWN BY:
CM


9348

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FLOOR DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS

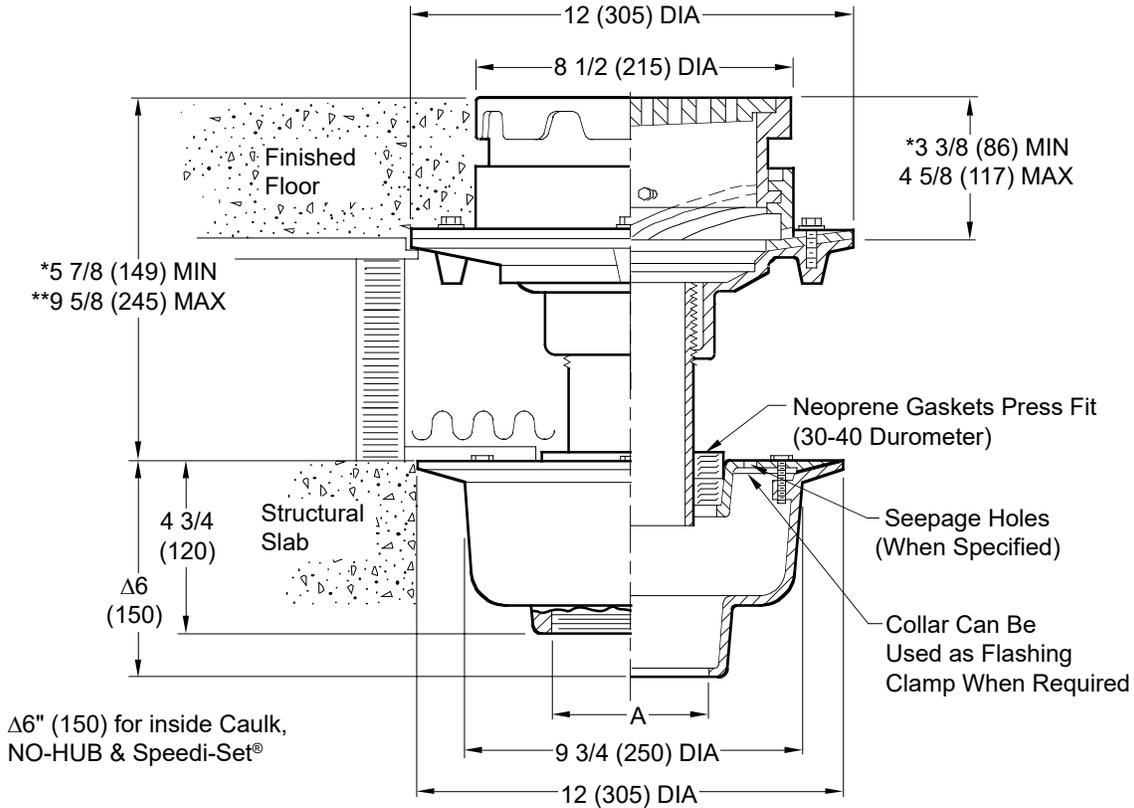

Δ6" (150) for inside Caulk, NO-HUB & Speedi-Set®

NOTE: *Add 1/4"(6) for Nickel Bronze or Polished Bronze Top.
 ** If greater dimension than shown from lower flange to top is required specify a longer nipple.

A (Pipe Size) = 02(50), 03(75), 04(100)

- Fig. 9348C . . . CAULK OUTLET
- Fig. 9348T . . . THREADED OUTLET
- Fig. 9348Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Lower Body and Flashing Collar with Neoprene Isolation Gasket, Adjustable Nipple, Upper Body and Flashing Collar with Adjustable Top and Bar Grate.

VARIATIONS:

- Safe-Set Sediment Bucket -B (Fig. 9341)
- Seepage Holes (in collar) -WSH
- Sump Receiver Plate -R
- Underdeck Clamp -C
- L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
- Vandal Proof Grate -U
- Tractor Grate -TG

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	11-15-23	Removed Function	HS	CL			9348
B	3-16-23	Rev. Var., Added Fig. Opt. Y, ®	KK	CL			
A	11-29-95	Submittal Update	EMB	BS			