


ROOF DRAIN

FOR INSULATED "BUILT-UP" MEMBRANE ROOFS

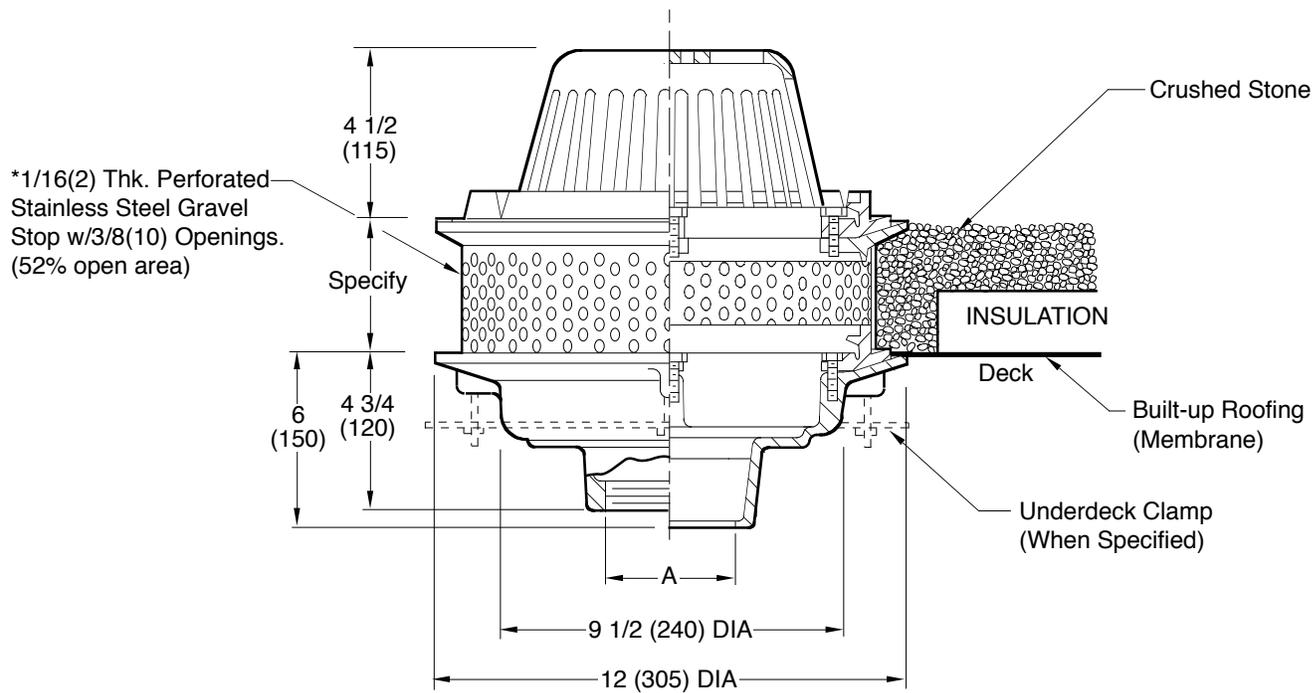

A (Pipe Size) = 02(50), 03(80), 04(100), 05(125) or 06(150)

- Fig. 1317C CAULK OUTLET
- Fig. 1317T THREADED OUTLET

recommended deck opening

with suffix -R	13(330) DIA
less suffix -R	11(280) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body with Flashing Clamp, Perforated Stainless Steel Extension, Gravel Stop and Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - L Speedi-Set Service Weight
02(50), 03(80) & 04"(100) sizes only
 - LXH Speedi-Set Extra Heavy
02(50), 03(80) & 04"(100) sizes only
 - Y NO-HUB
 - Sump Receiver -R
 - Underdeck Clamp -C

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S1317-CAN
 SIZE: A
 SCALE: NONE
 DATE: 2-1-82
 APPROVED BY: KG
 CHECKED BY: JM
 DRAWN BY: KG
 FIGURE NUMBER: 1317-CAN

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1317-CAN