


PLAZA AND PLANTER DRAIN

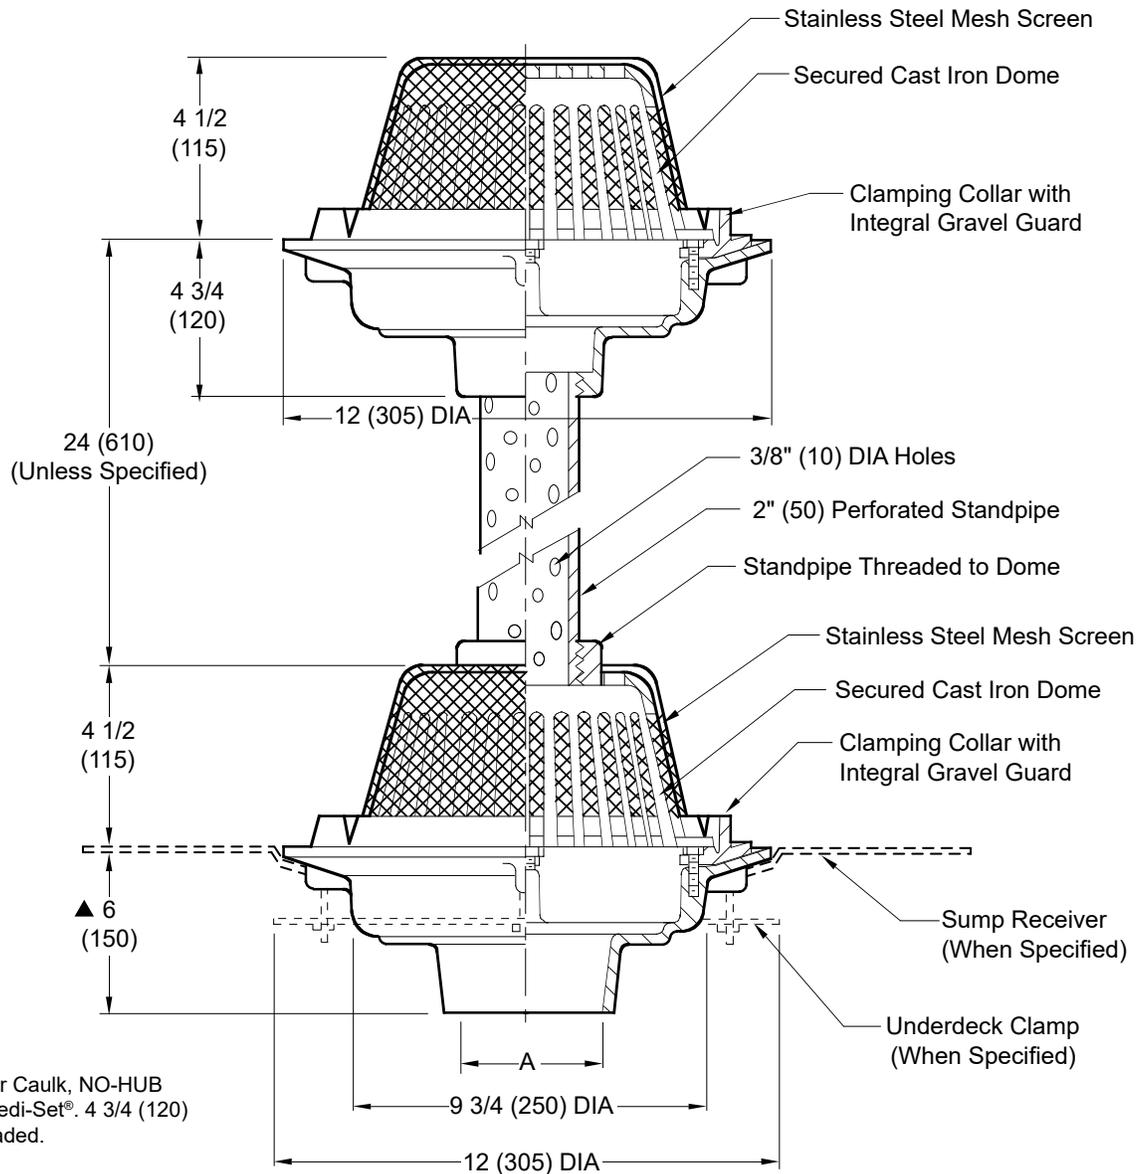

▲ Same for Caulk, NO-HUB and Speedi-Set®. 4 3/4 (120) for Threaded.

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 1915C . . . CAULK Outlet
- Fig. 1915T . . . THREADED Outlet
- Fig. 1915Y . . . NO-HUB Outlet

REGULARLY FURNISHED:

Upper and Lower Drain Duco Cast Iron Body with Cast Iron Combined Flashing Clamp and Gravel Stop with Secured PVC Perforated Standpipe.

VARIATIONS:

- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Roof Deck Plate -RDP

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1915
 SIZE A
 SCALE: NONE
 DATE: 3-25-88
 APPROVED BY: TD
 CHECKED BY: BS
 DRAWN BY: EMB
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

1915

| | | | | | | | |
|-------|---------------------------------|--|----------------|----------------|---------------|-------------------|---------------|
| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
| F E D | 9-27-24 04/19/10 03/25/10 | Revised Variations Added 24 unless specified Removed SQ note | HS JJ JJ | CL TK TK | | | 1915 |