

# FREEZELESS SILLCOCK

DRAWING NUMBER **s5640**

SIZE **A**

SCALE: **NONE**

DATE: **10-25-16**

APPROVED BY: **SJM**


CHECKED BY: **JM**

DRAWN BY: **TBW**

FIGURE NUMBER **5640**

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

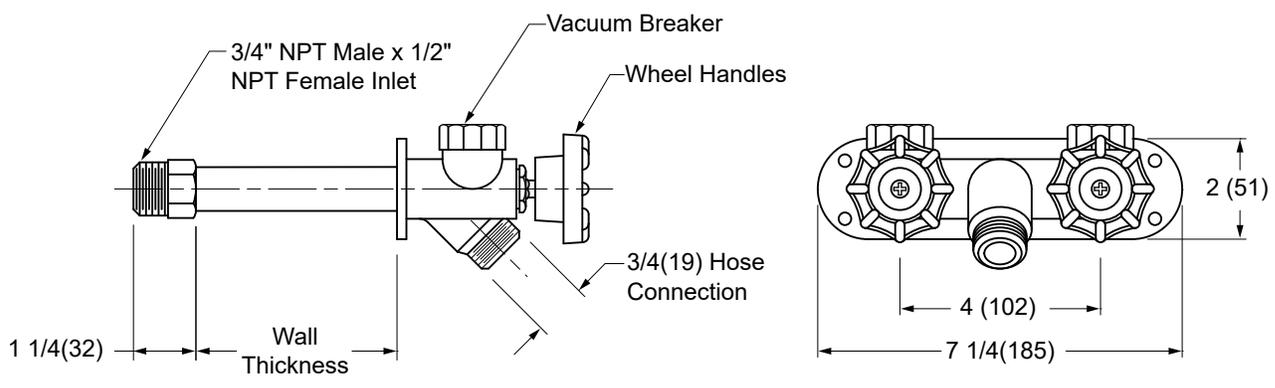

- Fig. 5640-06 ..... 6(150) Wall Thickness
- Fig. 5640-08 ..... 8(205) Wall Thickness
- Fig. 5640-10 ..... 10(255) Wall Thickness
- Fig. 5640-12 ..... 12(305) Wall Thickness
- Fig. 5640-14 ..... 14(356) Wall Thickness



**NOTES:**

1. Hydrant shall be installed in horizontal position only with hose connection pointing down. Use in commercial and residential applications.
2. When ordering, specify wall thickness in 02"(51) increments as follows: 06(150), 08(205) 10(255), 12 (305) or 14(356).
3. All Jay R. Smith hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
4. The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
5. Dimensions shown in parentheses are in millimeters.
6. **FOR IRRIGATION PURPOSES ONLY.**
7. Conforms to American Society of Sanitary Engineering (ASSE) Standard 1019-A.
8. Temperature Range: 33.0°F to 140.0°F (0.6°C to 60.0°C).

**REGULARLY FURNISHED:**

Lead Free Rough Bronze Chrome Plated  
 Non-Freeze Hydrant with Integral Wall Flange  
 and Vacuum Breaker, Wheel Handle and 3/4"(19)  
 Hose Connection.

C B A	3-14-25 2-3-25 8-7-23	Revised Notes and Fig. Opts Revised Notes Removed Function	HS HS HS	CL BW CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b>  <b>5640</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			