


G
 DRAWING NUMBER S1037 (-R-C)
 SIZE A
 SCALE: NONE
 DATE: 9-20-88
 APPROVED BY: CR
 CHECKED BY: TD
 DRAWN BY: EMB
1037 (-R-C)
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

ROOF DRAINS

SPECIAL ROOF APPLICATIONS

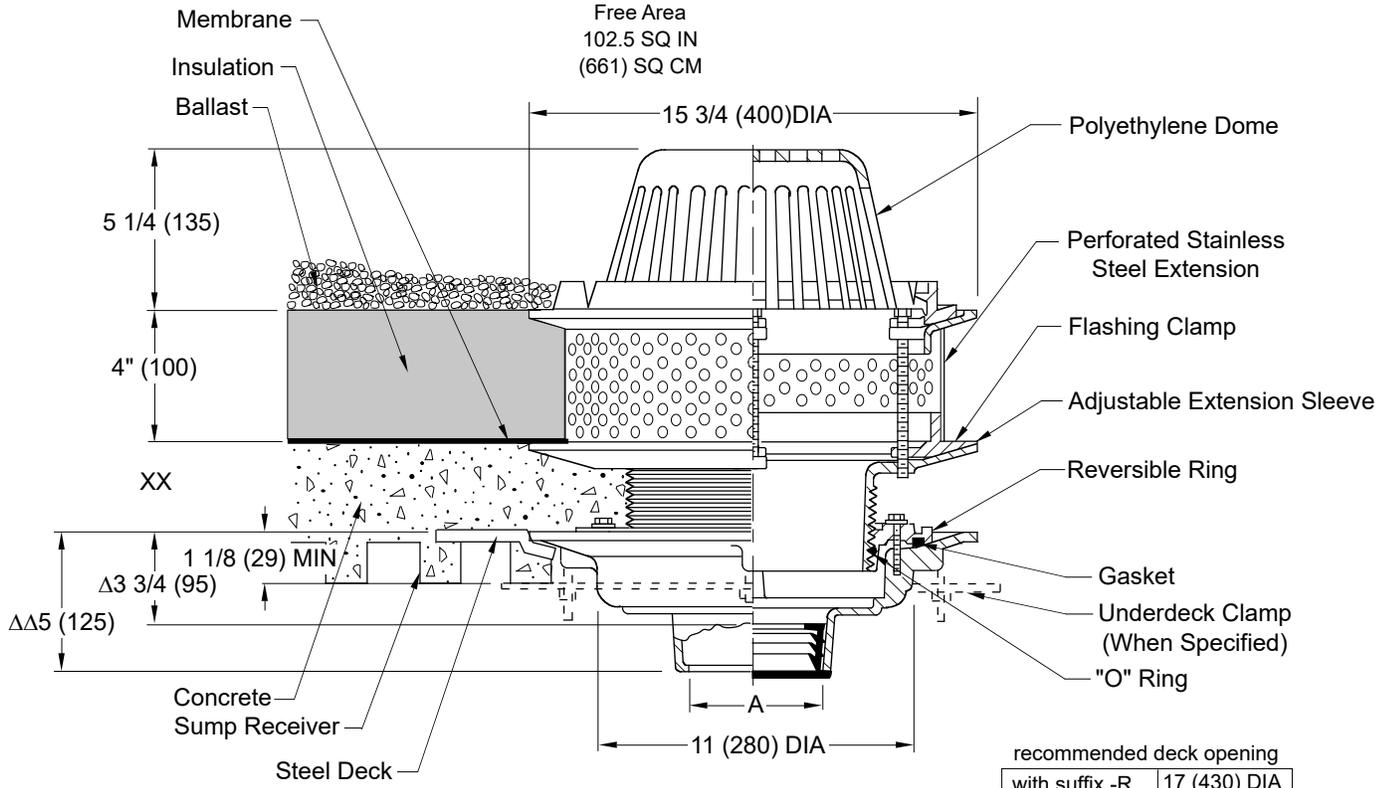

Free Area
 102.5 SQ IN
 (661) SQ CM

recommended deck opening	
with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

Δ This Dimension to Internal Stop of Speedi-Set® Gasket.
 ΔΔ Same for caulk, NO-HUB and Speedi-Set®, 3 3/4 (95) for Threaded.
NOTE: Dimensions shown in parentheses are in millimeters.

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 1037C CAULK OUTLET
- Fig. 1037Y. . . . NO-HUB OUTLET

	XX	MIN	MAX
Low Position	1 1/4 (32)	2 1/2 (64)	
High Position	2 1/4 (57)	4 (100)	

REGULARLY FURNISHED:
 Duco Cast Iron Body with Adjustable Extension Sleeve, Perforated Stainless Steel Extension, Combined Flashing Clamp and Gravel Stop, and Polyethylene Dome

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710) (Fig. 1010 only)
 - Higher Gravel Stop (Specify Height) -HGS
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set® Service Weight
02(50), 03(80), and 04"(100) sizes only (Fig. 1010 only)
 - LXH Speedi-Set® Extra Heavy
02(50), 03(80), and 04"(100) sizes only (Fig. 1010 only)
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Dome -U
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- ▲ Aluminum Dome -AD
 - ▲ Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - ▲ Rough Bronze Dome -RBD

▲ **Optional domes' free area are as follows:**
 Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							1037 (-R-C)