


# ROOF DRAIN AND OVERFLOW DRAIN

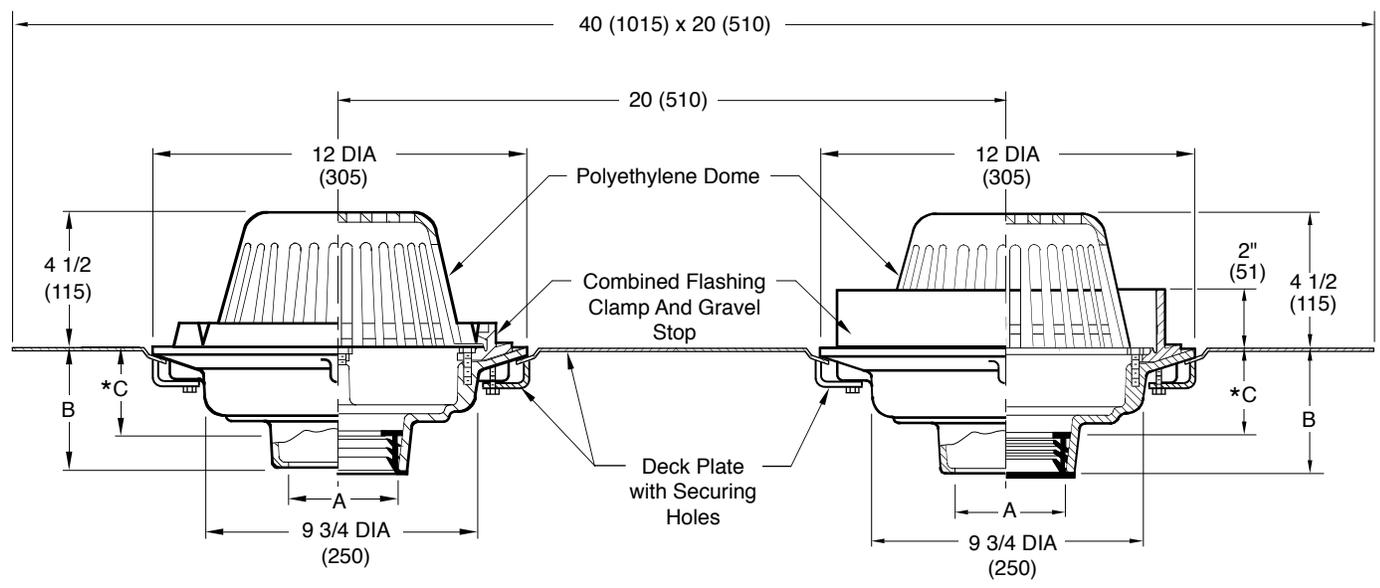

SQ-1-3282C.....CAULK OUTLET  
 SQ-1-3282Y..... NO-HUB OUTLET

A SIZE	B		*C	FREE AREA SQ IN (SQ CM)
	CAULK, NO-HUB, & SPEEDI-SET	THREADED		
02(50),03(75), 04(100) 05(125), 06(150)	6 (150)	4 3/4 (120)	4 3/4 (120)	71.5 (461)

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body, Double Deck Plate with Securing Holes, Combined Flashing Clamp and Gravel Stop for Roof Drain and External Water Dam for Overflow Drain, both with Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig.1710)
  - Extension (Specify Height) -E
  - L Speedi-Set Service Weight 02(50), 03(75), and 04(100)" sizes only
  - LXH Speedi-Set Extra Heavy 02(50), 03(75), and 04(100)" sizes only
  - Secondary Flashing Clamp -C2
  - Vandal Proof Dome -U
  - T Threaded Outlet
  - Waterdam Collar -WD (Specify 02.5", 03" or 04" High)

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
  - Cast Iron Dome -CID
  - Galvanized Cast Iron Dome -CIDG
  - Galvanized Cast Iron Body & Collar -G
  - Rough Bronze Dome -RBD

\* NOTE: This Dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **SQ-1-3282**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **08/27/03**  
 APPROVED BY: **CL**  
 CHECKED BY: **CL**  
 DRAWN BY: **RN**  
**SQ-1-3282**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
A	3-21-11	Revised Variations	TBW	BW			<b>SQ-1-3282</b>