


ROOF DRAIN AND OVERFLOW DRAIN WITH DECK TOP MOUNTING PLATE

Free Area
 41.5 SQ IN
 (268) SQ CM

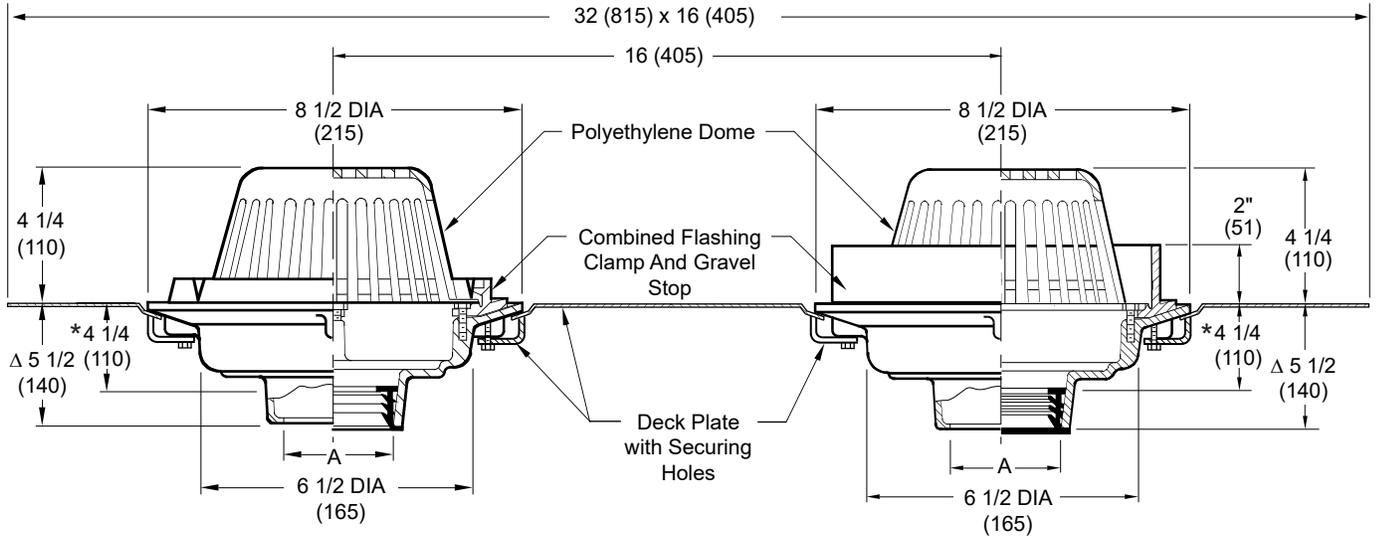

A (Pipe Size) = 02 (50), 03 (75) or 04 (100)

- 1830C.....CAULK OUTLET
- 1830T.....THREADED OUTLET
- 1830Y..... NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body, Double Deck Plate with Securing Holes, Combined Flashing Clamp and Gravel Stop for Roof Drain and External Water Dam for Overflow Drain, both with Polyethylene Dome.

VARIATIONS:

- Expansion Joint (Specify Fig.1710)
- Extension (Specify Height) -E
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Secondary Flashing Clamp -C2
- Vandal Proof Dome -U
- 4"(102) Tall S.S. Perforated Gravel Guard -GG04

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Dome -CIDG
- Galvanized Cast Iron Body & Collar -G
- Rough Bronze Dome -RBD
- Stainless Steel Mesh Over Dome -SSM

* NOTE: This Dimension to Internal Stop of Speedi-Set® Gasket.

Δ Same for Caulk, No-Hub and Speedi-Set®, 4 1/4 (110) for Threaded.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER s1830
 SIZE A
 SCALE: NONE
 DATE: 4-26-11
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: TBW
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER 1830

D	7-12-24	Rev. Fig. Opts., Var., Opt. Mat.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1830
C	3-8-23	Added © to "Speedi-Set"	KK	CL			
B	7-30-19	Removed NOTE	MW	CL			
A	11-16-15	Added Flow Rate Note	TBW	BW			
REV.	DATE	DESCRIPTION	BY	CKD. BY			