

## Post Hydrant

### MODEL M-ESH175

(FORMERLY M-ESHSC175)

3/4" FREEZE RESISTANT TRIMLINE POST HYDRANT WITH SHUT-OFF, HEAVY DUTY

#### STANDARD FEATURES

Model M-ESH175 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. The spring-loaded handle raises and lowers the internal supply line assembly, controlling the valve. The internal supply column is evacuated through drainage ports in the bottom and an integral internal shut-off valve ensures easy maintenance. This trimline design complements any setting. The hydrant must be operated fully "ON."

#### SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-ESH175. Unit shall be capable of year-round use in freezing weather and shall include an integral shut-off valve.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line. Unit shall include an integral shut-off valve. Inlet shall have a threaded connection.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be operated by lever handle spring-loaded for closure. Housing shall be cast aluminum, finished with a heavy grade of oil-based green enamel. Handle shall be an aluminum-bronze casting. All castings shall be manufactured in the USA and comply with ARRA standards, to include machining, assembly and painting.

Inner supply assembly shall incorporate solid-brass castings. All solid-brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casings and inner supply line shall be galvanized-steel pipe.

Nozzle shall be solid brass casting, threaded for 3/4" hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



**Standard Model:** M-ESH175

#### DEPTH OF BURY (additional costs may be incurred)

- |   |   |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm)    | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm)  | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other            |

#### OPTIONS (additional costs may be incurred)

- |                                |   |
|--------------------------------|---|
| <input type="checkbox"/> - BFH | Double ball check valve and vacuum breaker* |
| <input type="checkbox"/> -OM   | Omniflow (laminar flow) outlet              |
| <input type="checkbox"/> - VB  | Vacuum breaker                              |
| <input type="checkbox"/>       | Plain end outlet (no threads)               |
| <input type="checkbox"/>       | Black enamel                                |


\* See separate option sheets



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Post Hydrant  
MODEL M-ESH175**

**3/4" FREEZE RESISTANT TRIMLINE POST  
HYDRANT WITH SHUT-OFF, HEAVY DUTY**

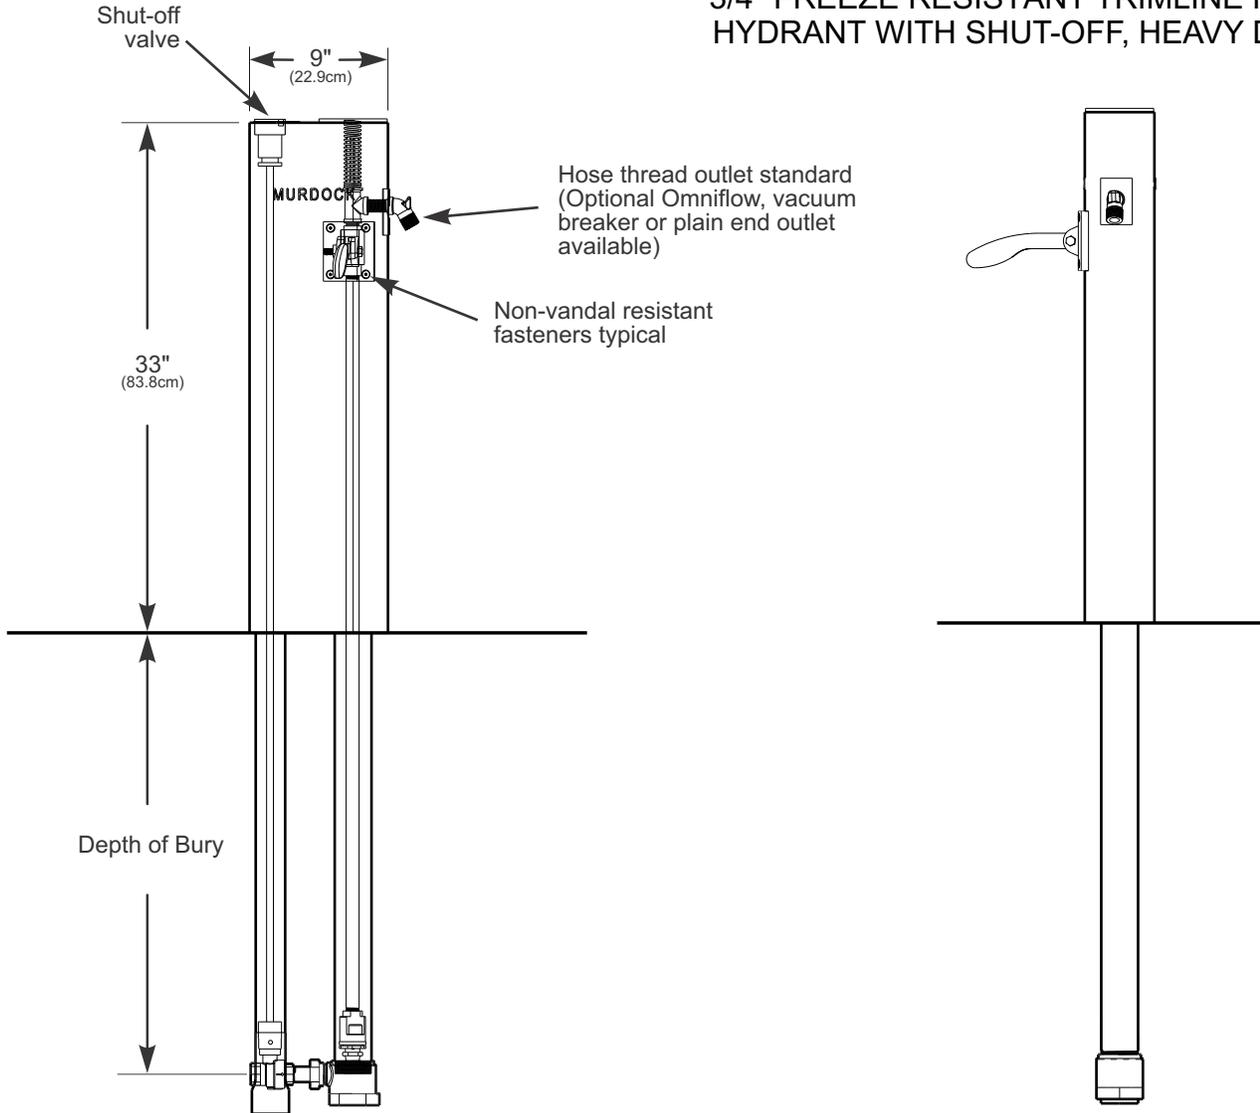

<b>SELECTION SUMMARY &amp; APPROVAL FOR MANUFACTURING</b>	Model Number & Options _____	Quantity _____	<p><i>All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.</i></p>
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	