



Whitehall Ligature Resistant Wall Shower

Model WH458-FH-CSH



WH458-FH-CSH

US PATENTS - US 10,474,170 B2 & US D697,591

Ligature Resistant Shower

Shower is arranged to be installed on a finished wall and serviced by removing housing. Housing is fabricated from 18 gauge, type 304 stainless steel with a white powder coat finish and 30° sloping top and bottom. Mounting channel is provided.

Conical Showerheads are chrome plated brass and provide vandal and suicide resistance. Spray pattern is a non-adjustable multi-stream style and provides a 1.5 GPM flow rate.

Valve, the T/P Mixing valve automatically mixes hot and cold water to deliver blended water within a specific range. Mixing Valve meets the most stringent performance criteria for temperature and pressure changes, defined by ASSE 1016. Valve conforms with lead free requirements of NSF61, Section 9, 1997 and CHSC 116875.

Temperature / Pressure Balancing Mixing Valve is IAPMO Certified and delivers blended water to meet performance requirements of ASSE 1016-2011. Control Handle is patented Tri-lever Ligature Resistant design. Valve conforms with lead free requirements of NSF61, Section 9, 1997 and CHSC 116875. Refer to WHSV16 series submittal for additional Data.

GUIDE SPECIFICATION

Provide and install a Best-Care™ Ligature Resistant Front Mounted Shower. Housing shall be fabricated of 18 gage type 304 stainless steel powder coated white. Mounting channel shall be fabricated from 18 gauge type 304 stainless steel. Fixture shall be furnished with two fixed conical showerheads, a control valve, a diverter valve both with Chrome Plated, Patented ADA Compliant Ligature Resistant Tri-Lever Handles. Fixture shall be furnished with necessary fasteners for proper installation.

NOTE: Due to limits in manufacturing, unit does not fully conform with ADA Requirements For ADA compliance refer to Model WH418ADA Flush Mount Series.

Please visit www.whitehallmfg.com for most current specifications.



Complies with the following standards: C



Federal Public Law 111-380 (No Lead)




Division of
 Acorn Engineering Company®



MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

- WH458-FH-CSH Surface Mount Ligature Resistant Wall Shower w/ Fixed Heads and Mounting Channel (Powder Coated White)

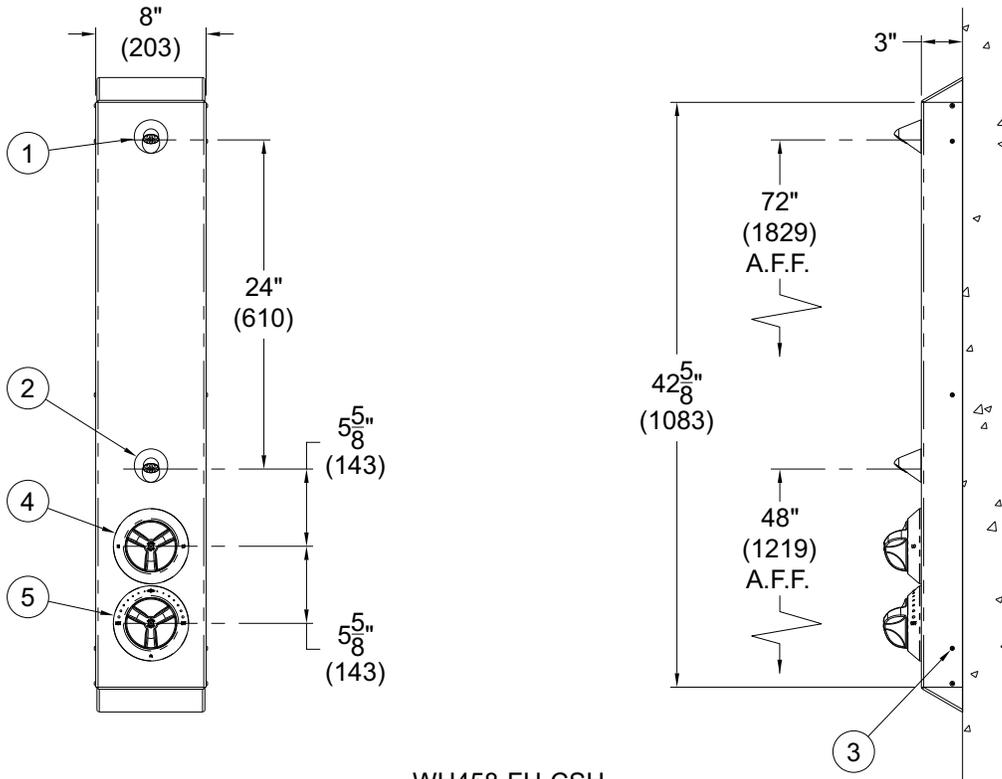

WH458-FH-CSH

NOTES:

- 1. Conical Shower Head.
- 2. Fixed Conical Shower Head At 48".
- 3. Tamper Resistant Fasteners.
- 4. Diverter Valve w/ Patented ADA Compliant, Ligature Resistant Tri-Lever Handle.
- 5. T/P Mixing Valve w/ Patented ADA Compliant, Ligature Resistant Tri-Lever Handle.

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International.