


A  
 DRAWING NUMBER S1017-83 Series-CAN  
 SIZE A  
 SCALE: NONE  
 DATE: 2-8-95  
 APPROVED BY:  
 CHECKED BY:  
 DRAWN BY: EMB  
 1017-83-CAN Series  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# SPECIAL PURPOSE ROOF DRAIN

## RAINTROL® ROOF DRAIN FOR IRMA ROOF APPLICATION

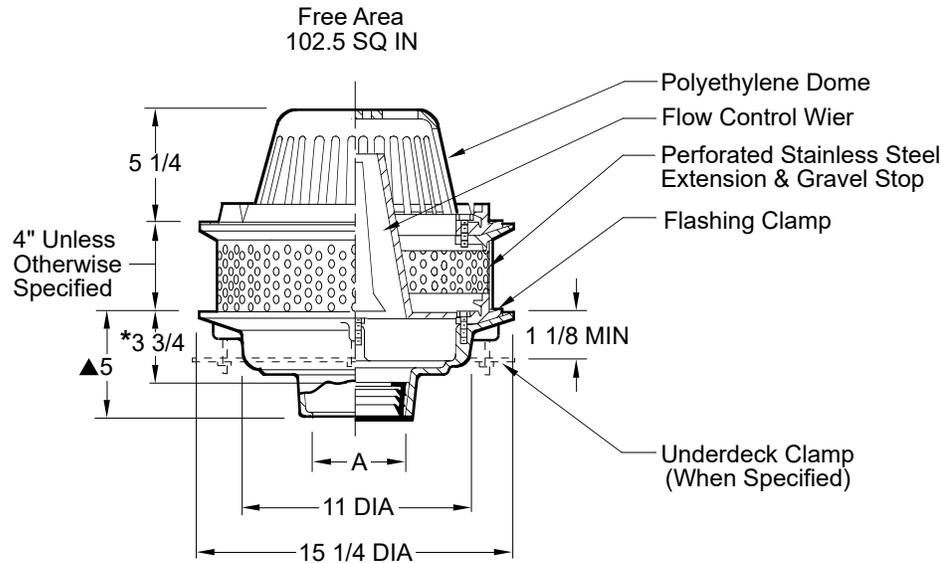

A (Pipe Size) = 02, 03, 04, 05 or 06

- Fig. 1017C . . . . CAULK OUTLET
- Fig. 1017Y . . . . NO-HUB OUTLET

\*This Dimension to Internal Stop of Speedi-Set Gasket.

▲ Same for Caulk, NO-HUB and Speedi-Set, 3 3/4 for Threaded

recommended deck opening

with suffix -R	17 DIA
less suffix -R	14 DIA

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Flashing Clamp, Perforated Stainless Steel Extension, Gravel Stop and Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
  - Higher Gravel Stop -HGS (Specify Height)
  - "L" Shaped Underdeck Clamp -CL
  - L Speedi-Set Service Weight (2, 3 & 4" sizes only)
  - LXH Speedi-Set Extra Heavy (2, 3 & 4" sizes only)
  - Sump Receiver -R
  - Underdeck Clamp -C
  - Vandal Proof Dome -U
  - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
  - Cast Iron Dome -CID
  - Galvanized Cast Iron -G
  - Rough Bronze Dome -RBD

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
A	10-12-23	Removed Function	HS	CL			1017-83-CAN Series