

A152.8FG-BF3 Series

MODEL: A152408S-FG-BF3

BARRIER FREE, 14 GAUGE BI-LEVEL, WALL MOUNTED ELECTRIC DRINKING FOUNTAIN WITH SEMI-RECESSED PUSHBUTTON OPERATED BOTTLE FILLER AND 32" TRIM PANEL

STANDARD FEATURES

- Both Child or Adult ADA Compliant (When Properly Installed)
- 14 Gauge, 304 Stainless Steel
- Polished Lead-Free Stainless Steel, Anti-rotation, Non-squirt Bubbler or Flexible Low Flow Bubbler
- 100-Mesh Inlet Strainer
- Mounting Frame (A0000000-MF15)
- 32" wide Trim Panel and Louvered Grille
- 1 GPM Fill Rate (Bottle Filler)
- Laminar Flow Water Supply (Bottle Filler)
- Chiller Includes Water Leak Detection Auto Shut-Off Valve

SUGGESTED SPECIFICATIONS

Model A152408S-FG-BF3 is a wall mounted, pressurized Bi-Level Electric Drinking Fountain and Bottle Filler combination that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be made from **14 gauge, 304 Stainless Steel** with a brushed finish. Fountain shall be activated by self-closing, frontal pushbuttons, by less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bottle Filler shall be activated by pneumatically operated Hemispherical Pushbutton. Cooling system shall use R-134a refrigerant and be capillary tube regulated. Chiller shall include Factory installed Water Leak Detection Auto Shut-Off Valve. Bubblers shall be polished Stainless Steel with non-squirt features and operate on a water pressure range of 20-105 PSIG. Unit shall have uniquely designed, two-piece contoured bowls with P-traps integral to the unit. Chiller shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Fountains and Chiller are certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A152408S-FG-BF3	8.0	390	4.6	130 lbs.

* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature
Compressor motor operates on 115 Volt / 60 Hz single phase.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61-2020

ANSI/ASHRAE 18

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK® MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL

A152.8FG-BF3

Revised: 06/10/2025



Model A152408S-FG-BF3 Shown

"INDOOR USE ONLY"

MODEL:

(Must Specify)

FLEXIBLE BUBBLER (LOW FLOW)

- A152208F-FG-BF3 Bronze Finish
- A152308F-FG-BF3 Gold Finish (High Polish)
- A152408F-FG-BF3 Satin stainless Finish

LEAD-FREE STAINLESS STEEL BUBBLER

- A152208S-FG-BF3 Bronze Finish
- A152308S-FG-BF3 Gold Finish (High Polish)
- A152408S-FG-BF3 Satin stainless Finish (Shown)

OPTIONS

(additional costs may be incurred)

- HP High Polished Stainless Steel
- RBL Reverse bi-level (Bottle Filler Opposite) (Mounting Frame A0000000-MF14)
- 220V 220 volt / 50 Hz Compressor (C€)

ACCESSORIES

(additional costs may be incurred)

- SK2-18 Skirt Kit, Stainless Steel, For Upper Unit¹
- WF3000 3000-gallon capacity Water Filter

NOTE:


1 - Refer to Supplemental Submittal Sheets for Details

Product Warranty

A152.8FG-BF3 Series



MODEL A152408S-BF3

BARRIER FREE, 14 GAGE BI-LEVEL, WALL MOUNTED ELECTRIC DRINKING FOUNTAIN WITH SEMI-RECESSED PUSHBUTTON OPERATED BOTTLE FILLER AND 32" TRIM PANEL

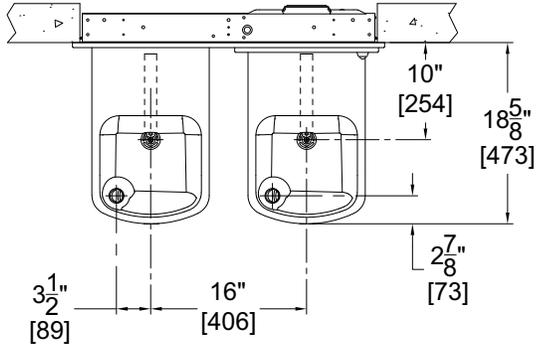

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES

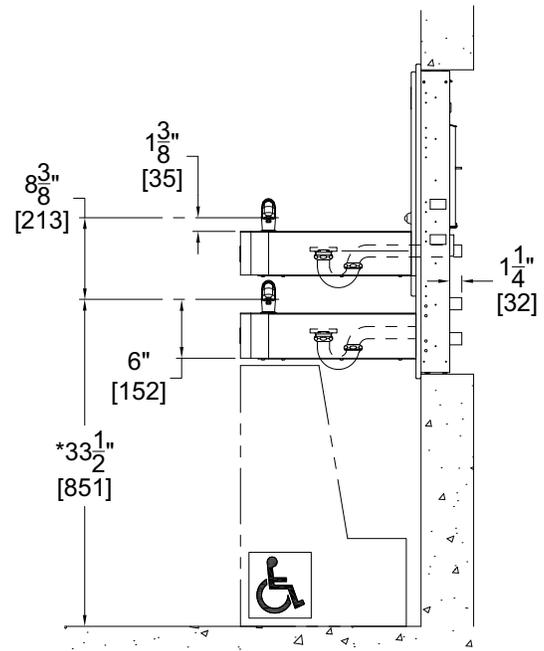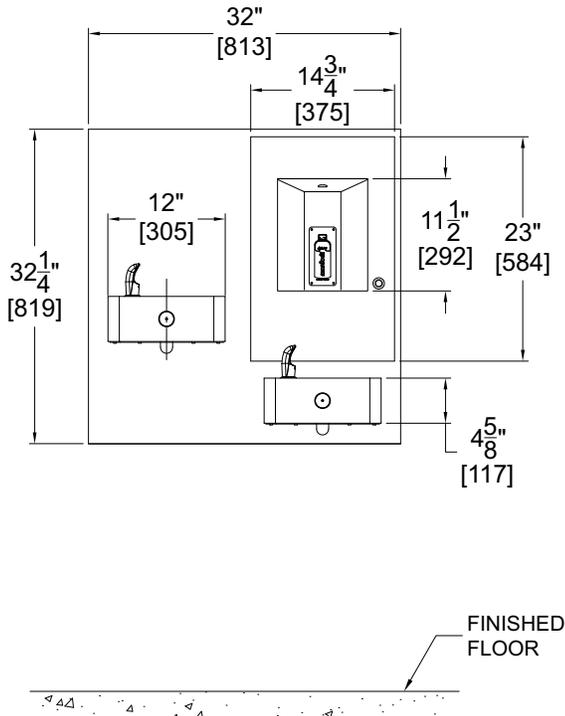

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature (Approval for Manufacturing) _____ Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.