


PROMENADE DECK DRAINS

SMALL - 8" (205) SQUARE WITH EXTENSION

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

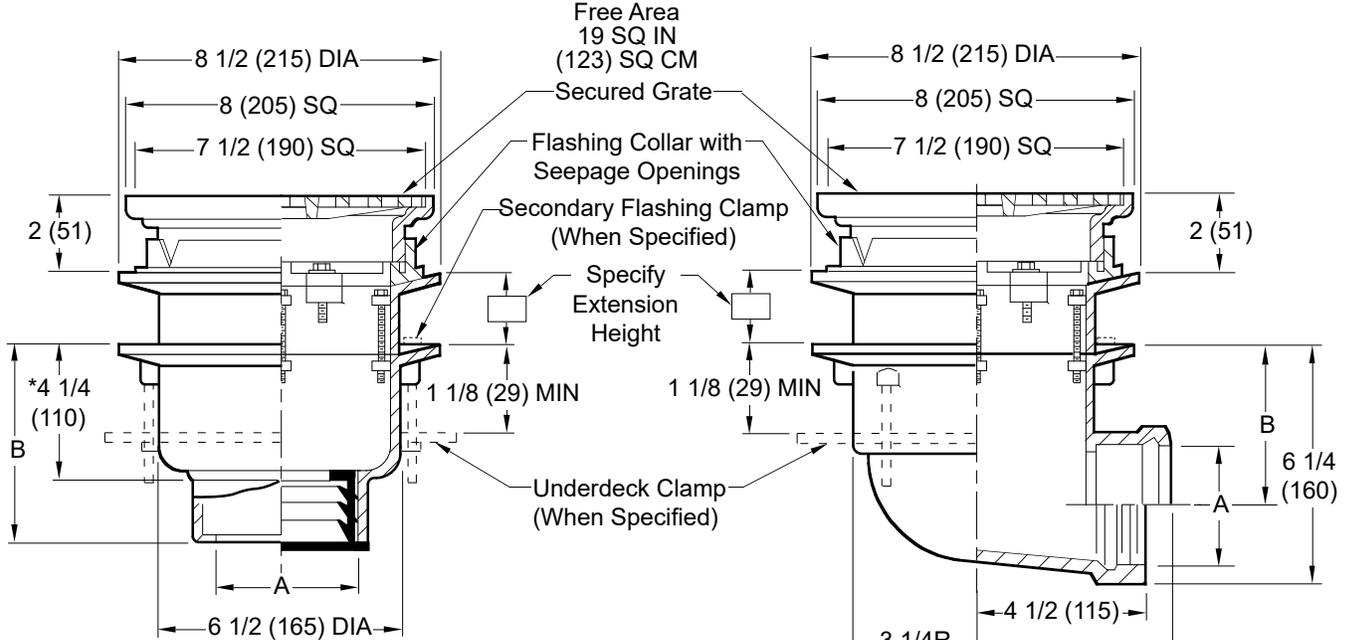

- Fig. 1470C (-E) CAULK OUTLET
- Fig. 1470Y (-E) NO-HUB OUTLET

- Fig. 1480C (-E) CAULK OUTLET
- Fig. 1480T (-E) THREADED OUTLET

A SIZE	02(50)	03(75)	04(100)
B	5 1/2(140) for Caulk, NO-HUB and Speedi-Set®		
	4 1/4(110) for Threaded.		

recommended deck opening

with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

*This Dimension to Internal Stop of Speedi-Set® Gasket.

REGULARLY FURNISHED:
 Duco Cast Iron Body with Extension and Flashing Clamp with Seepage Openings and Secured Square Hole Grate.

NOTE: Specify secondary flashing clamp (-C2) when drain is to be flashing at flange below insulation. When -C2 is specified, three 1/4"(6) diameter seepage openings are provided.

NOTE: Floor drains or area drains, when used to drain exterior areas (subject to rainfall) should have an open area equal to twice the cross sectional area of the connecting pipe.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710) (Fig. 1470 only)
 - L Speedi-Set® Service Weight (Fig. 1470 (-E) only)
 - LXH Speedi-Set® Extra Heavy (Fig. 1470 (-E) only)
 - "L" Shaped Underdeck Clamp -CL
 - NO-HUB Adaptor (Specify Fig. 2646Y)
 - Secondary Flashing Clamp -C2
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Screws -U
 - T Threaded Outlet
 - Heel Proof -HP
 - Bucket -B (Fig. 1470 Only)

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S1470 (-E)
 SIZE: A
 SCALE: NONE
 DATE: 5-24-93
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 FIGURE NUMBER: 1470 (-E), 1480 (-E)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

M	5-9-25	Revised Variations Added @	TB	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1470 (-E), 1480 (-E)
L	5-8-24	Removed Function	HS	CL			
K	2-5-24	Added Load Rating	HS	CL			
J	8-22-19		MW	JM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			