


D
 DRAWING NUMBER S1070 (-E-W)
 SIZE A
 SCALE: NONE
 DATE: 02/12/08
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: JJ
1070 (-E-W)
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

LARGE SPECIAL PURPOSE ROOF DRAINS

WITH OVERFLOW STANDPIPE

Free Area
 102.5 SQ IN
 (661) SQ CM

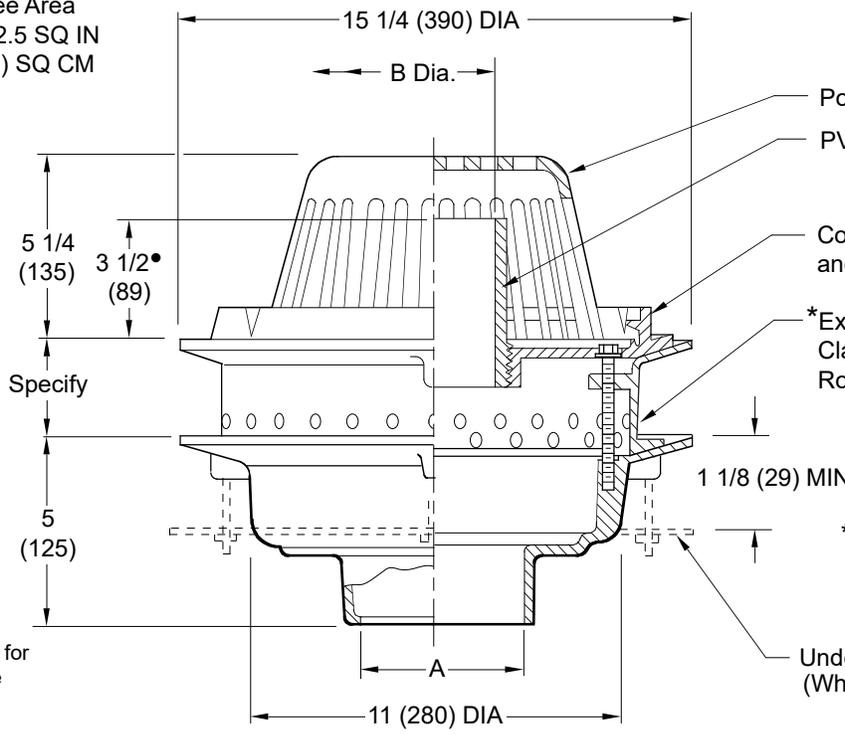

- Polyethylene Dome
- PVC Standpipe
- Combined Flashing Clamp and Gravel Stop
- *Extension with Secondary Clamping Device and 2 Rows of 1/4 (6) Dia. Holes
- 1 1/8 (29) MIN
- *Ext. thru 4" (100) size will be C.I., over 4" (100) will be fabricated stainless steel. (C.I. ext. shown)
- Underdeck Clamp (When Specified)

•Maximum Height for 8(200) Standpipe is 2 1/4(57)

A (Pipe Size)	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)	08 (200)
B (DIA)	4 (100)	4 (100)	4 (100)	6 (150)	6 (150)	8 (200)

- Fig. 1070C (-E-W) CAULK OUTLET
- Fig. 1070Y (-E-W) NO-HUB OUTLET
- Fig. 1070T (-E-W) THREADED OUTLET

recommended deck opening

with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body, Extension with Secondary Clamping Device and 2 Rows of 1/4 (6) Dia. Holes, P.V.C. Standpipe, Combined Flashing Clamp and Gravel Stop and Polyethylene Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Roof Deck Plate - RDP

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - Rough Bronze Dome -RBD
 - Cast Iron Standpipe -CIS

NOTE: Dimensions shown in parentheses are in millimeters.

D	3-25-24	Revised Variations, Fig. Opts.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1070 (-E-W)
C	11-8-22	Added Note	KK	CL			
B	7-30-19	Removed NOTE	MW	CL			
A	10-8-15	Added Flow Rate Note	TBW	BW			
REV.	DATE	DESCRIPTION	BY	CKD. BY			