


SPECIAL PURPOSE ROOF DRAIN

WATER DAM TYPE

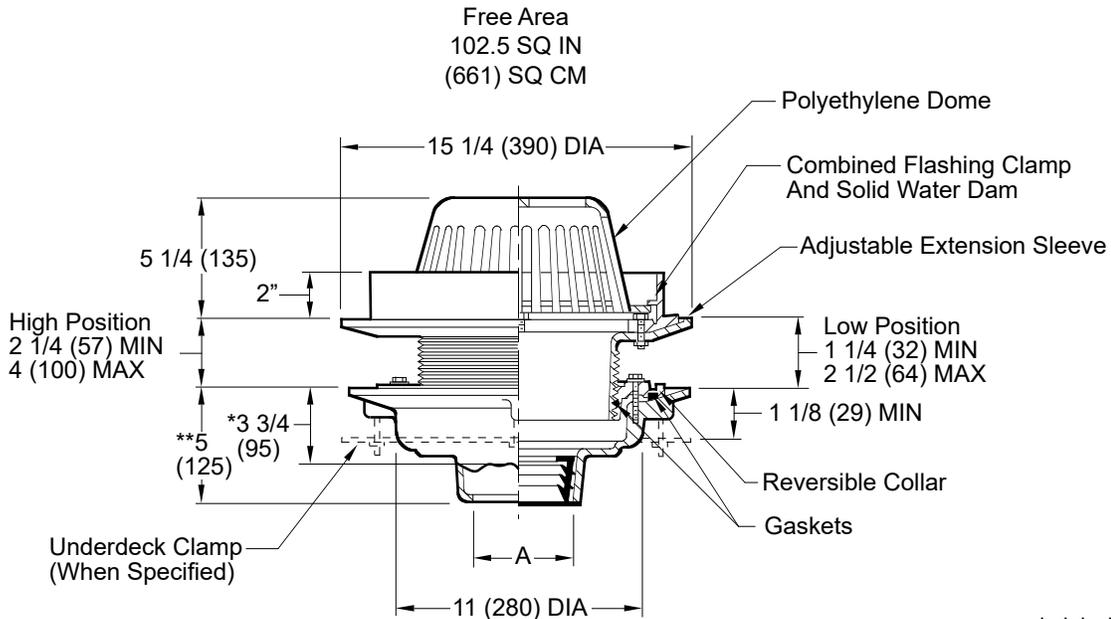

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150) or 08(200)

recommended deck opening
with suffix -R 17 (430) DIA
less suffix -R 14 (355) DIA

* This dimension to internal stop of Speedi-Set® Gasket
 ** Same for Caulk, NO-HUB and Speedi-Set®, 3 3/4(95) for Threaded

- Fig. 1045C CAULK OUTLET
- Fig. 1045T THREADED OUTLET
- Fig. 1045Y NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body with Adjustable Extension Sleeve, Reversible Collar, Combined Flashing Clamp and Water Dam and Polyethylene Dome.

NOTE: Dimensions shown in parentheses are in millimeters.

- VARIATIONS:**
- 2 1/2(64), 3(76) or 4"(100) Water Dams Available -WD
 - Expansion Joint (Specify Fig. 1710)
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
 - Secondary Flashing Clamp -C2 (See 1045-C2 Submittal)
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Roof Deck Plate -RDP

- OPTIONAL MATERIALS:**
- ▲ Aluminum Dome -AD
 - ▲ Cast Iron Dome -CID
 - ▲ Galvanized Cast Iron Body & Collar -G
 - ▲ Galvanized Cast Iron Dome -CIDG
 - ▲ Rough Bronze Dome -RBD

▲ **Optional domes' free area are as follows:**

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

DRAWING NUMBER S1045
 SIZE A
 SCALE: NONE
 DATE: 4-8-86
 APPROVED BY: JMcd
 CHECKED BY: JD
 DRAWN BY: CMB
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 FIGURE NUMBER 1045

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							1045