

PLANTING AREA DRAIN

FOR LARGE AREAS

Free Area
 53 SQ IN
 (342) SQ CM

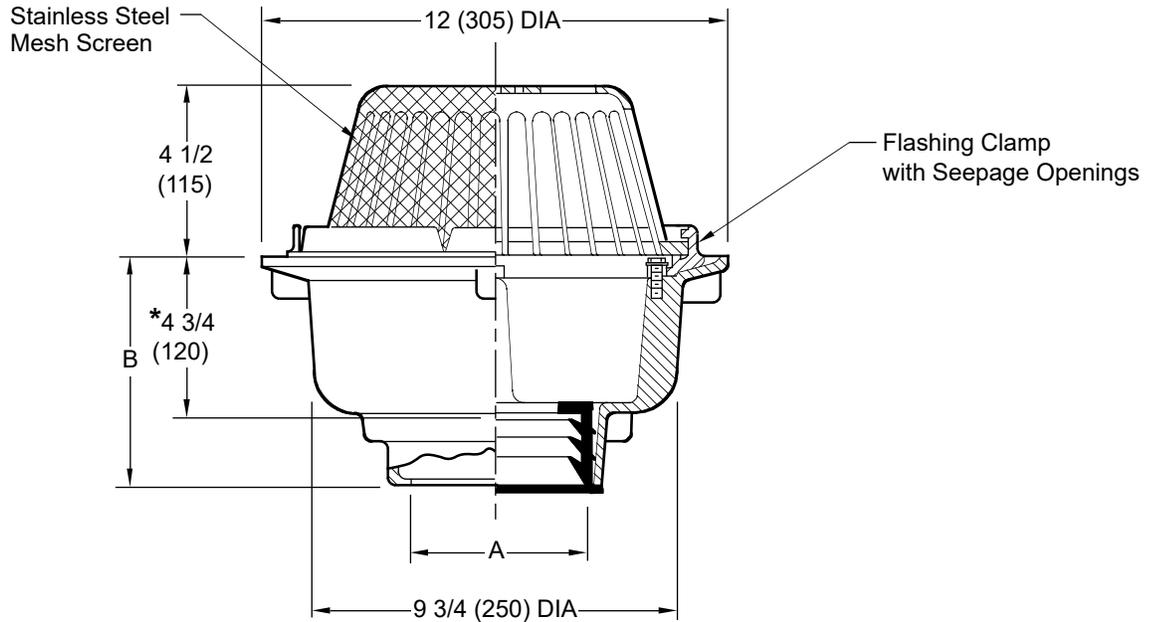


Fig. 2675C . . . CAULK OUTLET
 Fig. 2675Y . . . NO-HUB OUTLET

*This dimension to Internal Stop of Speedi-Set® Gasket.

NOTE: Dimensions shown in parentheses are in millimeters.

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	6 (150) for Caulk, NO-HUB and Speedi-Set® 4 3/4 (120) for Threaded				

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Clamp with Polyethylene Dome and Stainless Steel Mesh Screen.

VARIATIONS:

- L Speedi-Set® Service Weight
02(50), 03(80) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy
02(50), 03(80) & 04"(100) sizes only
- T Threaded Outlet

OPTIONAL MATERIALS:

- Bronze Body -BB
- Rough Bronze Dome -RBD
- Cast Iron Dome -CID
- Galvanized Cast Iron -G

DRAWING NUMBER S2675
 SIZE A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
 2675
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

E	8-10-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2675
D	3-13-23	Added ® to Speedi-Set	KK	CL			
C	5-10-18	Revised Optional Materials	TBW	CL			
B	7-7-95	Added Millimeters	EMB	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			