

REFERENCE DRAWING #9925-117-001

**INSTALLATION INSTRUCTIONS**

CLOSURES ARE PROVIDED WITH HOLE PUNCHING AND SHOULD BE USED AS A TEMPLATE FOR MARKING SCREW LOCATIONS ON CABINET FOR FIELD DRILLING AND TAPPING. TAMPER RESISTANT #10-32 x 1/2" STAINLESS STEEL SCREWS (1) ARE PROVIDED WHERE CLOSURES ATTACH TO CABINET OR A BRACKET. TAMPER RESISTANT #1/4"-20 x 1" STAINLESS STEEL SCREWS (2) ARE PROVIDED WHERE BRACKETS ATTACH TO WALL OR CEILING. WALL OR CEILING ANCHORS (3) ARE PROVIDED BY THE INSTALLER.

WHERE CLOSURES ATTACH TO TOP AND SIDES OF CABINET THE FACTORY PROVIDES AN INTEGRAL ANGLE (4) TO BE DRILLED & TAPPED IN THE FIELD.

AN 'L' CLIP FASTENER (5) IS SUPPLIED WHERE CLOSURES ATTACH TO BACK WALL OR CEILING. WHEN FIELD DIMENSIONS ARE REQUIRED, THEY MUST BE FURNISHED IN WRITING BY THE CUSTOMER BEFORE FABRICATION BEGINS. WHEN ORDERING PROVIDE FACTORY WITH GAP DIMENSIONS, CLOSURE TYPE AND CABINET SHOWER MODEL NUMBER.

**SEE ACORN CATALOG FOR AVAILABLE CLOSURE STYLES.**

<p>ACORN ENGINEERING COMPANY P.O. BOX 3527 INDUSTRY, CA. 91744 (626) 336-4561 FAX (626) 961-2200</p>	<p>TITLE <b>CABINET SHOWER CLOSURES</b></p>		
	<p>MANUFACTURE DATE</p> <p><b>JANUARY, 1985</b></p> <p><b>TO PRESENT</b></p>	<p>DATE ISSUED</p> <p><b>1/12/96</b></p>	<p>DRAWING NUMBER</p> <p><b>9925-119-001</b></p>
		<p>DATE REVISED</p> <p><b>02/03/09</b></p>	



**SPECIFY:**

- 1730 30" CABINET
- 1732 32" CABINET
- 1736 36" CABINET
- 1736ADA CABINET
- 1736ADA-FA
- 1736ADA-A
- KD

**-CHV CLOSURE, HORIZONTAL & VERTICAL**


- C CENTER
- L LEFT
- R RIGHT
- AL ANGLED LEFT
- AR ANGLED RIGHT
- TF TOP FRONT
  - ONE CABINET SINGLE
  - TWO CABINETS DOUBLE
  - OTHER \_\_\_\_\_
- STC SLOPING TOP (NO DIMENSIONS REQUIRED)

**-HAC HORIZONTAL ANGLED CLOSURES**


- AL ANGLED LEFT
- AR ANGLED RIGHT
- TSW TOP SINGLE WALL

**SPECIFY:**


- LESS PUNCHING FOR FASTENERS

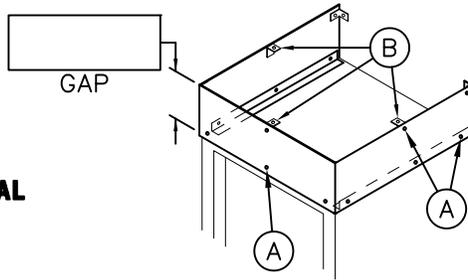


HAC - TSW  
TOP SINGLE WALL

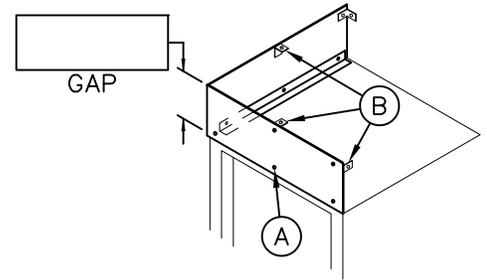

HAC - AL  
LEFT HAND TOP CLOSURE

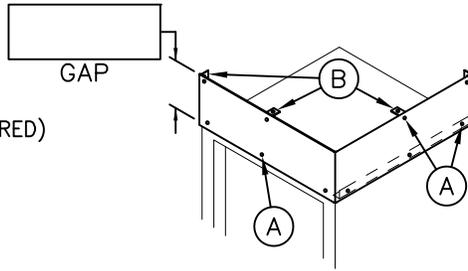


HAC - AR  
RIGHT HAND TOP CLOSURE

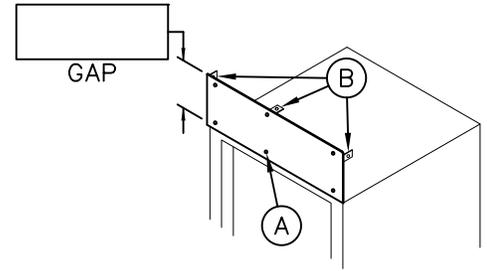


CHV - TF  
HORIZONTAL FACE  
CLOSURE - SINGLE


**ALWAYS SPECIFY "GAP" DIMENSIONS.**



CHV - STC  
SLOPING TOP CLOSURE  
(FIELD DIMENSIONS NOT REQUIRED)

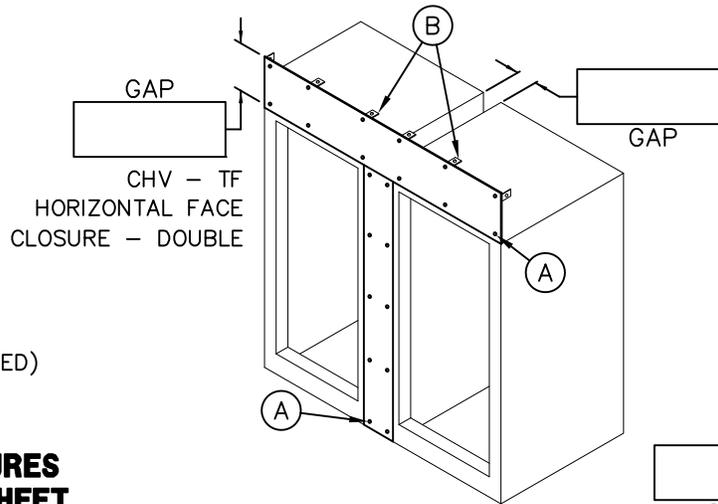

CHV - TF  
HORIZONTAL FACE  
CLOSURE - DOUBLE

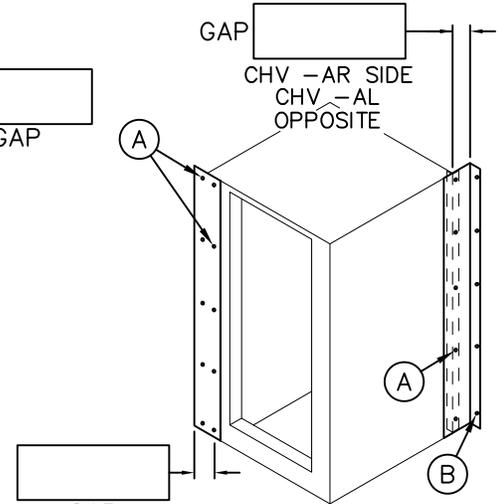

CHV - L  
VERTICAL FACE CLOSURE



CHV - R  
OPPOSITE

**CABINET SHOWER CLOSURES  
-CHV, -HAC SUBMITTAL SHEET**

REFERENCE DRAWING #9925-119-001

**ORDERING INSTRUCTIONS:**

SPECIFY 'GAP' DIMENSIONS AND TYPE OF CLOSURES REQUIRED WHERE INDICATED. FACTORY WILL CALCULATE OVERLAP AND DETERMINE IF INTEGRAL ANGLES ARE REQUIRED. FIELD DIMENSIONS ARE REQUIRED IN WRITING PRIOR TO FABRICATION. MEASUREMENTS FOR CLOSURES SHOULD BE TAKEN AFTER CABINET SHOWERS ARE INSTALLED. REFER TO ACORN CATALOG, PENAL-WARE, MODEL NUMBER AND OPTIONS SECTION FOR ADDITIONAL INFORMATION. FOR INSTALLATION DETAILS SEE DRAWING #9925-119-001.

A- WHERE THE CLOSURES ATTACH TO FRONT, TOP AND SIDES OF THE CABINET, THE CLOSURE SHOULD BE USED AS A TEMPLATE TO MARK THE LOCATIONS TO BE FIELD DRILLED AND TAPPED TO ACCEPT #10-32 UNF X 1/2" LONG (A) VANDAL RESISTANT FASTENERS PROVIDED.

B- WHERE THE CLOSURES ATTACH TO THE WALL OR CEILING, THE CLOSURE SHOULD BE USED AS A TEMPLATE TO MARK THE LOCATIONS TO BE FIELD DRILLED AND TAPPED TO ACCEPT #1/4-20 UNC X 1" LONG (B) VANDAL RESISTANT FASTENERS PROVIDED.



ACORN ENGINEERING COMPANY  
P.O. BOX 3527 INDUSTRY, CA. 91744  
(626) 336-4561 FAX (626) 961-2200

TITLE <b>CABINET SHOWER CLOSURES</b>		
MANUFACTURE DATE <b>FEBRUARY 1995 TO PRESENT</b>	DATE ISSUED <b>02/03/09</b>	DRAWING NUMBER <b>9925-117-001</b>
	DATE REVISED <b>07/13/11</b>	