



Whitehall Ligature Resistant Siphon Jet Replacement Toilet (Flush Valve Cover Provided Separately)

Model WHR2142



Ligature Resistant Siphon Jet Replacement Toilet

Ligature Resistant Siphon Jet Replacement Toilet is arranged to be installed against a finished wall from the front side with a fixture-to-wall mounting channel. Fixture is designed to replace a variety of existing toilets. Unit is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with exterior surfaces powder coated white (interior of toilet will have a satin finish and will not be powder coated). Toilet will be provided with WH-LRSC-GRAY Ligature Resistant ABS Toilet Seat Cover.

Toilet is siphon jet type with an elongated bowl manufactured to comply with ASME A112.19.3 and CSA B45.4 standards. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. On-floor units can withstand load rating of 5000 lbs. without permanent damage. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Toilet has a 1-1/2" NPT flushing inlet connection. Wall waste outlet connection is a 5-1/2" gasket flange. Floor waste outlet locations from rear of fixture are 10" or 12" with a 7-1/2" gasket flange.

Flush Valves, Top Supply Covers and Wall Supply Access Panels are optionally available for all styles of Toilets and may be specified separately.

GUIDE SPECIFICATION

Provide and install Whitehall Best-Care™ Ligature Resistant Replacement Toilet (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. On-floor units can withstand load rating of 5000 lbs. without permanent damage. Construction shall be seamless welded and exterior surfaces are powder coated white. Housing to include side access panels. Toilet shall be concealed siphon jet type with an elongated bowl and self-draining flushing rim. Toilet shall be ASME A112.19.3 and CSA B45.4 compliant. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Toilet trap shall have a minimum 3-1/2" seal and shall pass a 2-1/8" diameter ball and is fully enclosed. Provided with WH-LRSC-GRAY Ligature Resistant ABS Toilet Seat Cover.

- **Patented US 10,052,000 B2**

Please visit www.whitehallmfg.com
 for most current specifications.



Complies
 with the
 following
 standards:





MODEL NUMBER AND OPTIONS SELECTION:


BASE MODEL NUMBER

- WHR2142T-2-EGE10 Wall Outlet, Siphon Jet Replacement Toilet
- WHR2142T-3-EGE10 Floor Outlet, Siphon Jet Replacement Toilet

Accessories:


Note: Gray Ligature Resistant Seat Cover is Standard

- WH-LRSC-WHITE Ligature Resistant Seat Cover, White (Shipped Loose)
- WH-LRSC-BLUE Ligature Resistant Seat Cover, Dignity Blue (Shipped Loose)

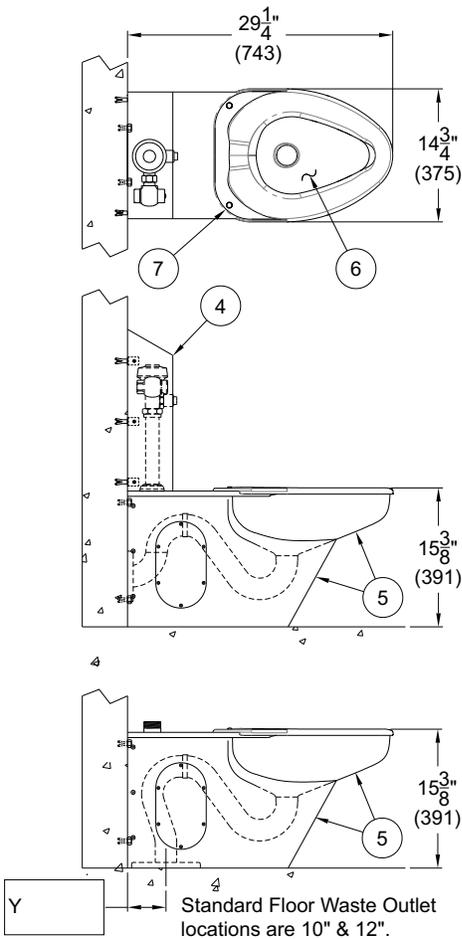


Standard Floor Waste Outlet locations are 10" & 12".
 For Y dimensions larger than 12", length increases proportionally.

1. Flushing Inlet
2. Waste Outlet
3. Mounting Points
4. Optional Flush Valve Cover With Flush Valve
5. Exterior Surfaces Powder Coated White
6. Interior of Toilet w/ Satin Finish (Not Powder Coated)
7. WH-LRSC-GRAY Whitehall Ligature Resistant ABS Toilet Seat Cover

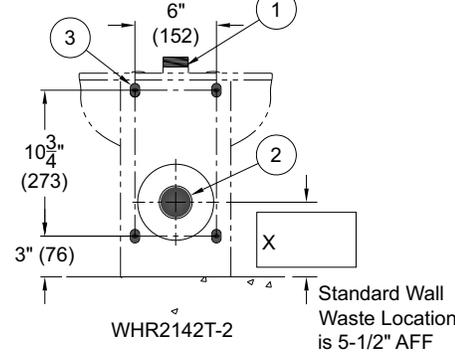

Standard Wall Waste Location is 5-1/2" AFF

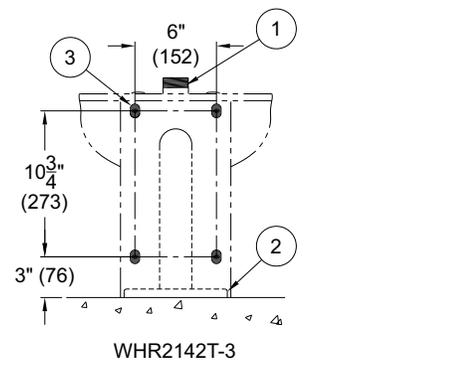

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.



MODEL NUMBER AND OPTIONS SELECTION:


BASE MODEL NUMBER

- WHR2142W-2-EGE10 Wall Outlet, Siphon Jet Replacement Toilet
- WHR2142W-3-EGE10 Floor Outlet, Siphon Jet Replacement Toilet



Accessories:

Note: Gray Ligature Resistant Seat Cover is Standard

- WH-LRSC-WHITE Ligature Resistant Seat Cover, White (Shipped Loose)
- WH-LRSC-BLUE Ligature Resistant Seat Cover, Dignity Blue (Shipped Loose)

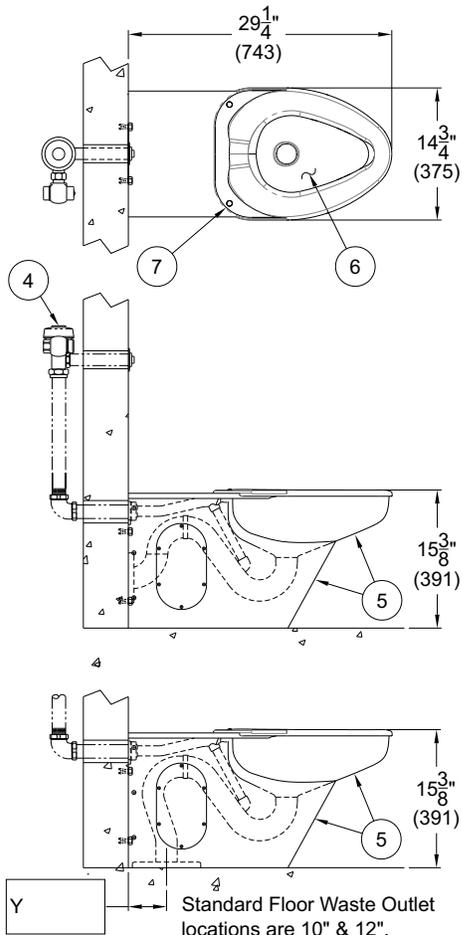

1. Flushing Inlet
2. Waste Outlet
3. Mounting Points
4. Optional Flush Valve
5. Exterior Surfaces Powder Coated White
6. Interior of Toilet w/ Satin Finish (Not Powder Coated)
7. WH-LRSC-GRAY Whitehall Ligature Resistant ABS Toilet Seat Cover

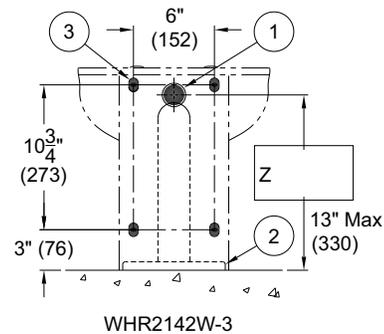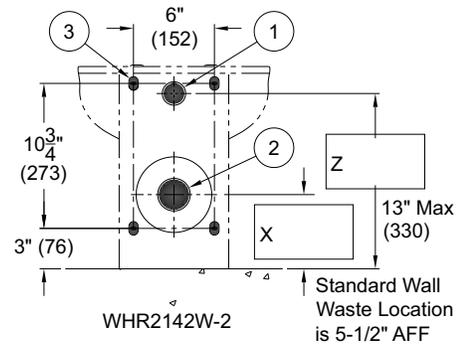

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.